



Specifications:

Input Power	5V +/- 5%, 3A
Power consumption	Max 15W
Radio working frequency	902 to 928 MHz
Radio max power	20 dBm (100 mW)
Encryption	128-bit
Color	Grey
Enclosure rating	Indoor use only
Power rating	5V 3A US plug, 1m, cable black

Physical dimensions:

Height	125mm (4.9")
Width	105mm (4.1")
Depth	29mm (1.1")
Weight	250g (0.55lb)

Description

The Levven Q Gateway connects the Levven controls and switches to the home network. Levven Q is how homeowners access and control every switch in their home from a mobile app on their device, or with voice commands to smart speakers in the home.

Installation


Place Levven Q in a central location, ideally near the Wi-Fi router or network switch. For optimum wireless reception, mount your Q vertically, high on a shelf or wall. Connect the supplied CAT-5 network cable between a LAN port on the home network router and Q's network port, and connect the Q to power.

Levven Q needs to be added to the controller group in the home. To group controllers yourself, refer to the guide at levven.com/support.

The Levven app is available on the Google Play Store and the Apple App Store. Search either store for "Levven". Follow the Levven Q Quick Start Guide for full step-by-step instructions.

Pairing

To add the Q Gateway to your home group, plug it in near the blue access wallplate and wait for the green light. Press the pairing button on the wallplate, then the V-shaped button on the Gateway. Both devices will flash red and green. Press the wallplate button again to confirm pairing, and both lights will turn solid green. The Q Gateway is now part of the group and ready for Wi-Fi connection.

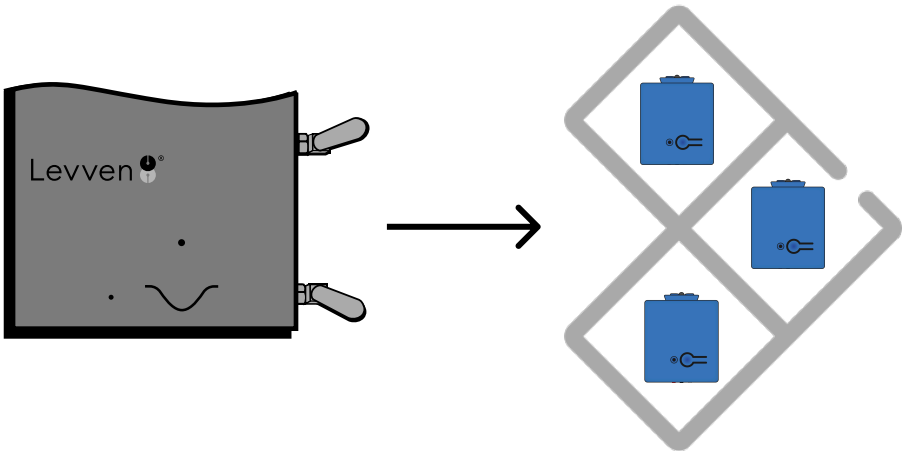

Certifications for LC-Q2 Gateway:

FCC Part 15 Class B
FCC ID: 2AA9N-LCQ2
IC ID: ICES-3(B)/NMB-3(B)
Industry Canada ID: 11506A-LCQ2

Manufacturer information:
Levven Electronics Ltd.
9741 - 54 Ave NW
Edmonton, AB, Canada T6E 5J4

Proudly manufactured in 
Telephone: +1 (844)-553-8836
Email: info@levven.com
Website: www.levven.com