



# STEGOCRAWL® TAPE


A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00 | VERSION: MAY 26, 2021

## 1. PRODUCT NAME

**STEGOCRAWL TAPE**

## 2. MANUFACTURER

Stego® Industries, LLC  
 216 Avenida Fabricante, Suite 101  
 San Clemente, CA 92672  
 Sales, Technical Assistance  
 Ph: (877) 464-7834  
 contact@stegoindustries.com  
**stegoindustries.com**

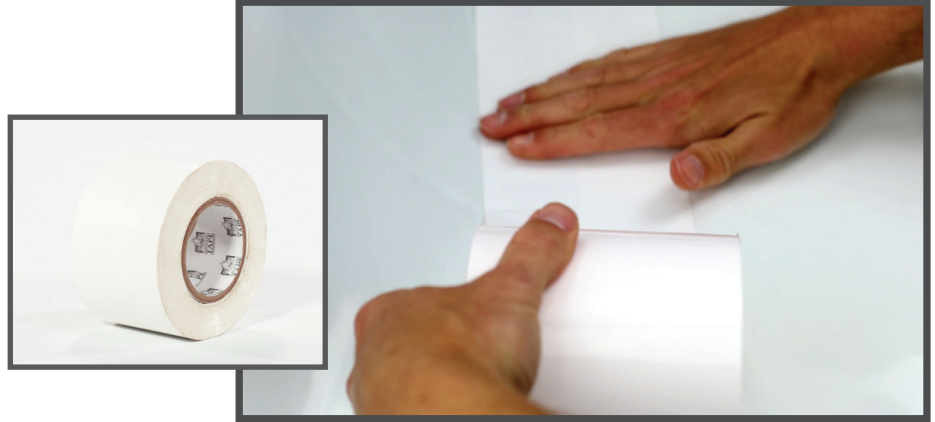

## 3. PRODUCT DESCRIPTION

**USES:** StegoCrawl Tape is a low permeance tape designed for protective sealing, seaming, and patching applications where a highly conformable material is required. StegoCrawl Tape is engineered to bond to StegoCrawl® Wrap.

**COMPOSITION:** StegoCrawl Tape is composed of polyethylene film and an acrylic, pressure-sensitive adhesive.

### FEATURES AND BENEFITS:

- **Roll Size: 3.75" x 180'**
- **Extremely low permeance**
- **Great long-term adhesion**
- **8 mils thick – superb durability**
- **White color complements the white StegoCrawl encapsulation system**
- **Low VOC Emissions - Certified Clean Air GOLD**
- **Made in the USA with US and Global materials**



## 4. TECHNICAL DATA

APPLICABLE STANDARDS:

Pressure Sensitive Tape Council (PSTC)

- PSTC 101 – International Standard for Peel Adhesion of Pressure Sensitive Tape
- PSTC 16 - International Standard for Loop Tack

**TABLE 1: PHYSICAL PROPERTIES OF STEGOCRAWL TAPE**

PROPERTY	TEST METHOD	RESULTS
Total Thickness		8 mil
Permeance		0.03 perms
Ultimate Tensile Strength	ASTM D882	28 lb/in width
Elongation (at break) MD	ASTM D882	995%
180° Peel Adhesion	PSTC 101 20 min dwell ss	115 oz/in width
	PSTC 101 20 min on HDPE	102 oz/in width
Adhesion Loop Tack	PSTC 16	90 oz/in width
Ultraviolet Resistance		Excellent

Note: perm unit = grains/(ft<sup>2</sup>\*hr\*in-Hg)

Continued...

Note – legal notice on page 2.

## STEGOCRAWL® TAPE

A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00 | VERSION: MAY 26, 2021

### 5. INSTALLATION

**SEAMS:** Overlap seams a minimum of six inches and seal with StegoCrawl Tape. Some codes require a minimum of a twelve inch overlap. Check appropriate codes prior to installation. Make sure the area of adhesion is free from dust, dirt, moisture and frost to allow maximum adhesion of the pressure-sensitive tape.

**SEALING AROUND PIPES:** Install StegoCrawl Wrap around pipe, minimizing the void space. Seal around base of pipe with StegoCrawl Tape.

StegoCrawl Tape should be installed above 40°F. In temperatures below 40°F, take extra care to remove moisture or frost from the area of adhesion.

For additional information, please refer to StegoCrawl's complete installation instructions.

### 6. AVAILABILITY & COST

For cost and availability of StegoCrawl Tape, please contact your local Stego Industries' Sales Representative.

### 7. WARRANTY

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided herein. Stego Industries, LLC does offer a limited warranty on StegoCrawl Wrap. Please see [stegoindustries.com/legal](http://stegoindustries.com/legal)

### 8. MAINTENANCE

Periodically check to ensure seams are secure and damage is repaired using StegoCrawl Accessories.

### 9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries or by visiting the website.

**Email:** [contact@stegoindustries.com](mailto:contact@stegoindustries.com)

**Contact Number:** (877) 464-7834

**Website:** [stegoindustries.com](http://stegoindustries.com)

### 10. FILING SYSTEMS: [stegoindustries.com](http://stegoindustries.com)

(877) 464-7834 | [stegoindustries.com](http://stegoindustries.com)

DATA SHEETS ARE SUBJECT TO CHANGE. FOR MOST CURRENT VERSION, VISIT [STEGOINDUSTRIES.COM](http://STEGOINDUSTRIES.COM)

