



WhisperFit - Warm

Low profile fan/heater solution
for small bathrooms

FV-07VFH3

This unique small fan/heater solution is ideal for remodeling and simple installation in small bathrooms.

The WhisperFit-Warm™ provides the benefits of a low profile ventilation fan that fits in a 2"x6" joist cavity or nearly every ceiling capacity. It not only ventilates bathroom moisture and odors, but also provides an added source of heat with a quick, one-minute warm up. This 70CFM fan is the ideal solution for contractors to suggest to homeowners remodeling their bathrooms, especially those who live in cold weather climates or are looking for an added source of heat to keep warm after a shower.

There is no equal in the market today!



Key Features and Benefits:


- ❑ Ideal for remodeling and simple installation in small bathrooms
- ❑ Low profile housing design fits in 2"x6" construction
- ❑ Aerodynamic fan design delivers whisper quiet operation
- ❑ 1 minute warm-up quickly heats up a room
- ❑ Detachable filter removes dust from exhaust air and is easy to clean
- ❑ 1300 watt temperature regulating PTC* heater ensures safety and reliability
- ❑ Additional Benefits:
 - ❑ Fully enclosed condenser motor for long life rated for 30,000 hours continuous run
 - ❑ Thermal fuse protection on motor and 3-level safety device for heater
 - ❑ Built-in damper to prevent back draft
 - ❑ 4" duct adapter included
 - ❑ 3 year warranty on parts



*** 1300 Watt PTC (Positive Temperature Coefficient) Heater uses ceramic stones with self-limiting temperature characteristics which have fast heating response times and plateau once the pre-defined reference temperature is reached. A thermostat and thermal cut-off switch have been added for safety in case of an abnormal temperature rise in the heater.**

Specifications

WhisperFit-Warm		FV-07VFH3	
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25
	Air Volume (CFM)	70	59
	Noise (sones)	1.5	2.2
	Power Consumption (watts)	26.2	26.1
	Energy Efficiency (CFM/Watt)	2.7	2.3
	Speed (RPM)	1135	1305
	Current (amps)	0.17	0.17
	MAX. Current(amps)	0.22	
	Power Rating (V/Hz)	120/60	
Specifications	Motor Type	AC	
	Type of Motor Bearing	Ball	
	Thermal Fuse Protection	Yes	
	Blower Wheel Type	Sirocco	
	ENERGY STAR Qualified	No	
Installation	Duct Diameter (Inches)	4"	
	Mounting Opening (Inches sq.)	10-3/5"	
	Grille Size (Inches sq.)	12-3/5"	
Heater	PTC Heater	Yes	
	Directional Louver	N/A	
	Heating Element (Watts)	1,300	
Shipping	Gross Weight (lbs)	11.2	
Approved Code/ Standard/Regulation	UL tub/Shower Enclosure	N/A	
	Washington VIAQ Code	Yes	
	California Title 24 Compliant	Yes	
	Mfg in ISO 9001 Certified Facility	Yes	

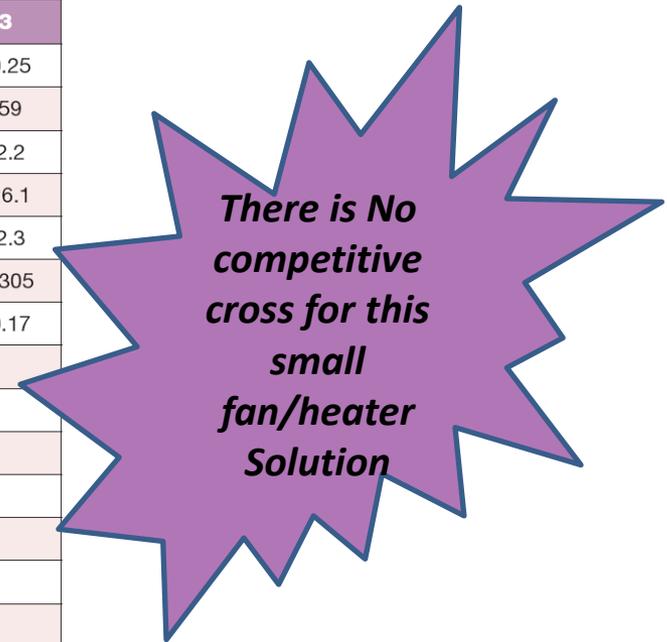

Target Audience:

- Remodelers
- Builders
- Contractors
- Homeowners

Projects:

- Remodel residential
- Age-restricted community
- Over walk-in tubs



Panasonic Advanced Ventilating Fans

Please bookmark:

www.us.panasonic.com/ventfans

- Technical specifications
- Installation Instruction
- Submittal sheets and architectural specifications
- And much more...