



ERV CONSTRUCTO 2.0ES

Part no. 47115

80 to 183 CFM (0.4 in. w.g.)



VB0170

CONSTRUCTO® SERIES: PERFECT FOR NEW RESIDENTIAL CONSTRUCTIONS

Contractors and builders need cost-effective, reliable and code-compliant mechanical ventilation systems for new home construction. The Venmar AVS Constructo Series offers superior value at an entry-level price. The ERV Constructo 2.0ES represents over 15 years of continuous improvement to deliver contractors the durability and reliability they have come to expect from Venmar.

Key features:

- Removable crossflow polymerized paper ERV core
- Maintenance free, totally enclosed, sealed bearings motor
- Pressure taps, balancing dampers and straps for insulated ducts for quick, effective installation
- Can be installed upside down
- Compatible with the Deco-Touch™ digital wall control

REPAIRS AND MAINTENANCE

Venmar AVS ERV Constructo 2.0ES modular design makes it possible to remove all mechanical parts in less than 5 minutes. The low power consumption motor is permanently lubricated. Finally, the electronic circuit board eliminates electromechanical parts, reducing repair time to a minimum.

WARRANTY

The ERV Constructo 2.0ES is protected by a 5-year warranty on parts, including the energy recovery core, with the original proof of purchase.

Available at:

ENERGY RECOVERY VENTILATOR

Controls

- This unit is very simple to operate: press on its push button, located on the electrical compartment, to activate it. Press once for low speed, once again for high speed, and once more to stop it.
- The following optional main controls are available:
 - Deco-Touch digital control* n° 40395
 - Lite-Touch Constructo n° 40370
 - Constructo n° 40350
- * **Recirculation mode not available**
- Up to 5 of the following optional auxiliary controls can also be added:
 - Dehumidistat n° 11297
 - 20-minute lighted push button n° 12030

For more details about controls, refer to their specification sheet on venmar.ca.


Options

- Complete line of registers and diffusers

Defrosting System

The ERV Constructo 2.0ES uses an efficient defrosting method. No negative pressure is created by air exhausted to the outside, as the air is recirculated into the house, helping to prevent any backdraft.

OUTDOOR TEMPERATURE		DEFROST CYCLE (IN MINUTES)
°C	°F	DEFROST / OPERATION
WARMER THAN -5	WARMER THAN 23	NO DEFROST
-5 TO -15	23 TO 5	10 / 60
-15 TO -27	5 TO -17	10 / 30
-27 AND LESS	-17 AND LESS	10 / 20

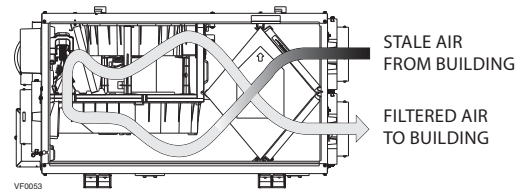

Energy Recovery Core

Dimensions: 15.4" x 10.6" x 10.6" (39.1 cm x 26.9 cm x 26.9 cm)

Exchange surface: 107 ft² (9.94 m²)

Weight: 14.2 lb (6.44 kg)

Material: Polymerized paper


Type: Crossflow core

Warranty: 5 years

Requirements and Standards


- Complies with the UL 1812 requirements regulating the installation of Energy Recovery Ventilators
- Complies with the CSA C22.2 no. 113 Standard applicable to ventilators
- Complies with CSA F326 requirements regulating the installation of Energy Recovery Ventilators
- HVI certified
- Technical data was obtained from published results of tests relating to CSA C439 Standards

DIMENSIONS: ERV CONSTRUCTO 2.0ES

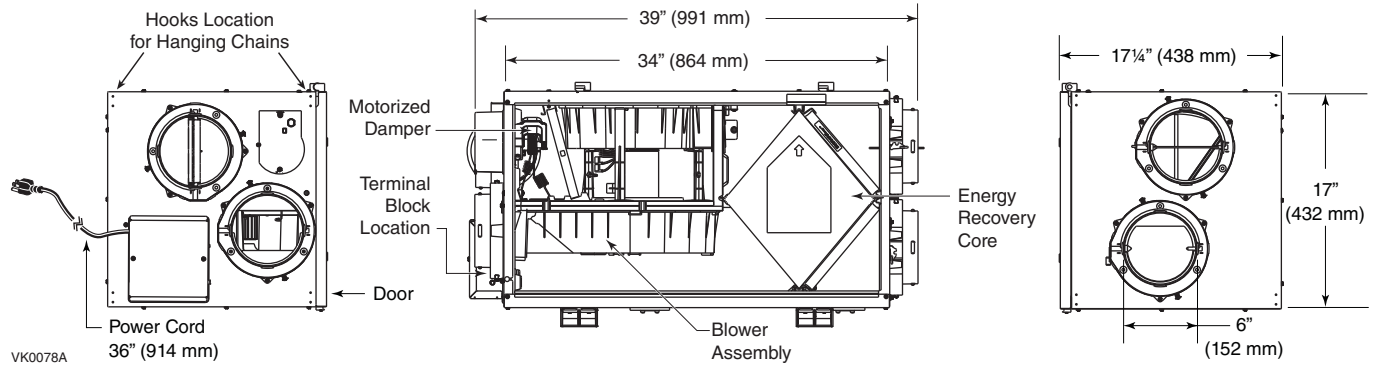

VENTILATION PERFORMANCE

EXT. STATIC PRESSURE	NET SUPPLY AIR FLOW	GROSS AIR FLOW								
		SUPPLY			EXHAUST					
PA	IN. W.G.	L/S	CFM	M ³ /H	L/S	CFM	M ³ /H	L/S	CFM	M ³ /H
25	0.1	105	222	377	106	225	382	106	225	383
50	0.2	99	209	355	100	212	360	104	220	374
75	0.3	93	198	336	94	200	340	100	212	360
100	0.4	86	183	311	88	186	316	93	198	337
125	0.5	76	162	275	78	165	280	87	185	315
150	0.6	70	148	251	71	150	255	75	158	269
175	0.7	60	128	217	61	130	221	56	119	202
200	0.8	50	107	182	51	108	183	29	61	104

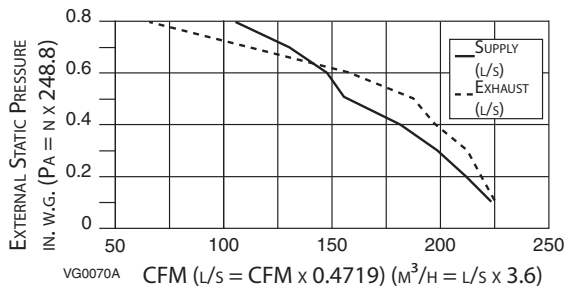

ENERGY PERFORMANCE

SUPPLY TEMPERATURE		NET AIR FLOW			POWER CONSUMED WATTS	SENSIBLE RECOVERY EFFICIENCY	APPARENT SENSIBLE EFFECTIVENESS	LATENT/RECOVERY MOISTURE TRANSFER
°C	°F	L/S	CFM	M ³ /H				
HEATING								
0	32	39	80	137	84	60	72	60
0	32	-	-	-	-	-	-	-
0	32	54	114	194	113	58	69	53
0	32	79	167	284	169	56	66	45
-25	-13	31	65	110	116	41	86	47
COOLING								
						TOTAL RECOVERY EFFICIENCY		
35	95	39	82	139	81	52		

NOTE: All specifications are subject to change without notice.

SPECIFICATIONS AND RATINGS

- Model: ERV Constructo 2.0ES
- Part Number: 47115
- Total Assembled Weight: (Including polymerized paper core): 76 lb. (35 kg)
- 6" Round Ports
- Filters: 15 ppi washable reticulated foam 15.375" x 7.125" x 0.75" (39 cm x 18 cm x 1.9 cm)
- Housing: Pre-painted steel
- Insulation: Expanded polystyrene
- Mounting: Suspension by chains and springs
- Supply and exhaust blower motor: 1 PSC motor
 - Protection Type: Thermally protected
 - Insulatin Class: B
- Speed Control on unit: Low and High speeds. Other modes available with optional main wall controls.
- Energy Recovery Core:
 - Exchange Surface Area: 107 ft² (9.94 m²)
 - Type: Crossflow
 - Material: Polymerized paper
- Unit Electrical Characteristics: 120 volts, 60 Hz, 2.1 amps, 200 watts

Project:	REMARKS
Location:	
Part Number: 47115	
Qty.:	
Submitted by: _____ Date: _____	



Residential Products Group, 550 Lemire Blvd., Drummondville, Qc, Canada J2C 7W9 - Tel.: 1-800-567-3855 Fax: 1-800-567-1715



www.venmar.ca

ERVConstructo2.0ESd140617