


WALL ASSEMBLY

ZIP SYSTEM® SHEATHING
WOOD OR LT. GAUGE METAL STUDS

ANY GAPS BETWEEN PIPE AND CUT WALL EDGE THAT EXCEED $\frac{1}{2}$ " SHOULD BE FILLED WITH EXPANDABLE FOAM INSULATION, BACKER ROD OR FIBER-REINFORCED GAP FILLER.

SPREAD THE WET PRODUCT TO CREATE A MONOLITHIC "CAP FLASH" FLASHING MEMBRANE. SMOOTH LIQUID FLASH MATERIAL USING A RADIUS CAULKING KNIFE OR SIMILAR TOOL.

APPLY A GENEROUS BEAD OF LIQUID FLASH BETWEEN THE PIPE AND THE CUT PANEL EDGE AND ONTO THE PANEL SURFACE.

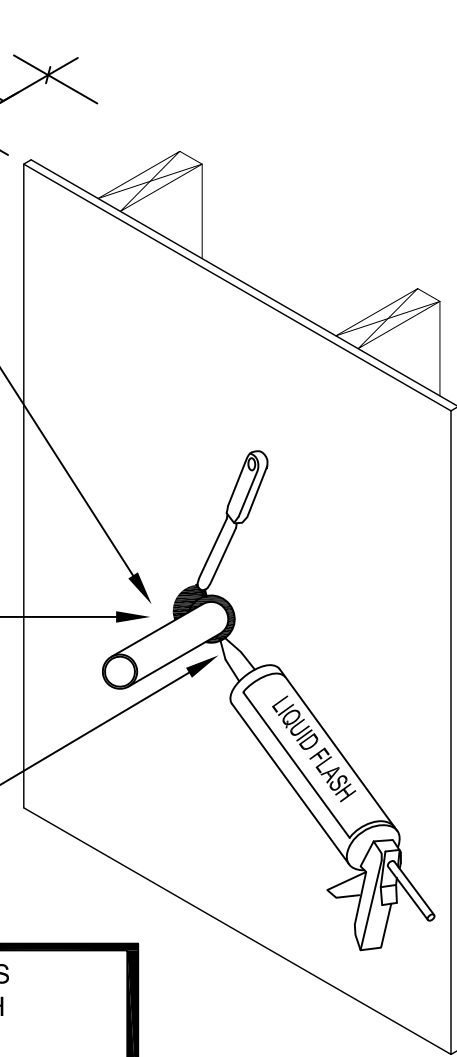

NOTE: CLOTHES DRYER EXHAUST VENTS SHALL BE SEALED IN ACCORDANCE WITH SECTION 504 OF THE INTERNATIONAL MECHANICAL CODE. ZIP SYSTEM LIQUID FLASH IS NOT RECOGNIZED AS FIRE CAULKING.

DRAWING NOT TO SCALE

07-09-2012

Sales Office: 10925 David Taylor Drive - Suite 300 - Charlotte, NC 28262
Telephone: 800.933.9220 - Facsimile: 704.547.9228 - www.zipsystem.com

another innovation from



ENGINEERED WOODS