

Panasonic



Ventilation Fans



**BalancedHome®
Energy Recovery
Ventilators (ERVs)**



**Intelli-Balance®
Energy Recovery
Ventilators (ERVs)**

Ventilation and Indoor Air Quality Solutions

Panasonic



Award Winning Commitment to Innovation

Our longstanding record of industry recognition continues. The Environmental Protection Agency (EPA) recognized Panasonic with the ENERGY STAR® Partner of the Year Sustained Excellence Award, which demonstrates exemplary commitment to leadership in energy efficiency and the ENERGY STAR® program.

Table of Contents

The Power of Panasonic	4
Powerful Ventilation and IAQ Solutions	6
Ventilation Fans	8
WhisperGreen® Select.	10
WhisperSense® DC	22
WhisperRecessed® LED	24
WhisperCeiling® / WhisperCeiling® DC	25
WhisperFit® DC	29
WhisperValue® DC	32
WhisperWarm® DC	38
EcoVent®	40
WhisperFresh®	42
Contractor Packs	46
Energy Recovery Ventilators (ERVs)	48
BalancedHome®	50
Intelli-Balance®	54
WhisperComfort® 60	58
SelectCycler®	59
Dryer Exhaust Duct Power Ventilators	62
Lint Traps	64
Inline Fans	66
Destratification Fans	72
Atmosphere Accessories	73
Smart Controls	76
Swidget®	78
WhisperControl®	80
Accessories	82
WhisperVent® Wall Cap	84
EZSoffitVent™	84
FlexDamper®	85
Optional Designer Grilles	85
EcoSwitch™	86
Recessed Inlet®	86
SmartExhaust™	86
Performance Curves	88
FAQ	101
Ventilation Controls	104
Sizing Information and Instructions	105
Installation	106

The Power of Panasonic

Panasonic ventilation fans and energy recovery ventilators (ERVs) help reduce issues with poor ventilation, remove stale air, meet code requirements, reduce callbacks and enhance customer satisfaction, ultimately supporting better indoor air quality.



Ensure code compliance



Reduce callbacks



Simplify design & installation



Guarantee customer satisfaction

Why Power Rating Matters

Fans – Effective ventilation requires strong airflow. Panasonic fans deliver unmatched air-moving performance, verified in real-world tests, exceeding standard static pressure benchmarks. ECM motors ensure powerful airflow at typical installation pressures.

When you install a Panasonic ventilation fan you get the promised **True Flow rating** as listed on the box.

ERVs – Energy Recovery Ventilators (ERVs) provide tempered supply air to the home while exhausting stale indoor air. SmartFlow™ technology overcomes static pressure to provide balanced ventilation while recovering energy and moisture from the exchanged air. High-performance, balanced ventilation with a range of speeds (Cubic Feet/Minute (CFM)) provide flexibility in managing airflow. With superior energy recovery, Panasonic ERVs are a smart part of your ventilation strategy.

Certified & Code Compliant

Fans – Panasonic ventilation fans are certified by the Home Ventilating Institute (HVI) and ENERGY STAR® certified, compliant with ASHRAE 62.2, ENERGY STAR® for Homes 3.2, Indoor airPlus, CALGreen, NAHB Green Building Standard, EarthCraft and other green building programs.

ERVs – Panasonic ERVs can be used to comply with ASHRAE 62.2, Ontario Building Code, ENERGY STAR®* and Novoclimat requirements; LEED, Indoor airPLUS, California Title-24, and 2021 Washington State Residential Energy Code.

Commitment to Indoor Air Quality & Healthy Homes

Panasonic is a member of the Indoor Air Quality Association (IAQA), we adhere to industry standards, ensuring high indoor air quality and healthy homes.

Did you know?

Tests conducted by Lawrence Berkeley National Laboratory revealed that almost half of all installed ventilation fans do not meet ASHRAE 62.2, despite their advertised CFM.



Learn more at iaq.na.panasonic.com

Fan Features

Powerfully Quiet

Panasonic ventilation fans provide high performance and whisper-quiet operation, efficiently removing air pollutants.

Long Life

Motors are engineered for continuous use; up to 30,000 hours of AC and 60,000 hours of DC (ECM) motors, featuring rust-resistant paint and durable housing.

Easy Installation

Features like duct adapters, adjustable mounting brackets (up to 24" o.c.) and easy-to-remove fan/motor units simplify installation. Flex-Z Fast® single-hinged brackets ensure flexible, hassle-free setup.

Energy Savings

When it comes to energy efficiency, our low wattage requirements are among the lowest in the industry. Our fans have also been engineered to comply with ENERGY STAR® 4.1 delivering cost-effective performance.

Safety

WhisperGreen® Select models are protected by UL Class 2 Power Unit while all other models are equipped with thermal fuse protection. With the exception of the ERVs and fan/heaters, all models are UL listed for tub/shower enclosure when GFCI protected.

Airflow

Integrated plastic or metal dampers in all ceiling-mounted applications help prevent backdraft. The built-in metal flanges block air leaks through drywall to increase performance.

Lighting

All of our lighted models are equipped with JA8 compliant LED lights for CA Title 24. Offering 50,000 hours of life and integrated night lights.

Green Manufacturing

All "fan only" models are RoHS compliant. Restriction of Hazardous Substances Directive (RoHS) compliant. RoHS restricts the use of the following six substances in the manufacturing process: Lead, Mercury, Cadmium, Hexavalent Chromium [CR(VI)], Polybrominated Biphenyls (PBB), and Polybrominated Diphenyl Ether (PBDE).

ERV Features

Fan Speed

Select models at desired CFM levels ranging between 30-210 CFM.

Sensible Recovery Efficiency

Sensible Recovery Efficiency as high as 90% for the Intelli-Balance Elite Plus 150 CFM units.

Control Panel

Integrated LED control panel with the ability to set and monitor air flow operation.

Filters

A variety of MERV filtration options are available – from MERV 13 to MERV 6.

Frost Prevention

Frost Prevention mode automatically activates to prevent core from freezing.

Moisture Control

Panasonic's ERV core balances humidity between the indoor and outdoor airflows.

Mounting Options

A variety of mounting options are available including wall mounted with included brackets or suspended by chains (sold separately) or between floors.

Fault Indicator Display

Fault Indicator Display (FID) on the ERV and optional wall control notifies user when filter maintenance is needed, or system issues.

All Ventilation Products

Warranty

ECM motors have a 6-year warranty, LEDs a 5-year warranty, and AC motors a 3-year warranty.

Note: All our ventilation fans are UL listed for tub/shower enclosure when GFCI protected except for WhisperFresh® Select fans, BalancedHome® ERVs, Intelli-Balance® ERVs, WhisperComfort® 60 ERVs and WhisperWarm® DC fans.

*Meets strict energy efficiency guidelines set by Natural Resources Canada and is ENERGY STAR® certified for the Canadian market only. There are no ENERGY STAR® ratings for ERVs in the US market.

VENTILATION

WhisperGreen[®] Select
VENTILATION FAN

One Fan - Multiple IAQ Solutions



WhisperCeiling[®] DC
VENTILATION FAN

Precision Spot Ventilation Solution



WhisperSense[®] DC
VENTILATION FAN

Precision Spot Ventilation Solution
with built-in Dual Sensor Technology




WhisperValue[®] DC
VENTILATION FAN

Ideal Multifamily Solution



WhisperFit[®] DC
VENTILATION FAN

Ideal Retrofit Solution



WhisperWarm[®] DC
VENTILATION FAN

Quiet, Fan/Heater Solution



WhisperFresh[®]
VENTILATION FAN

Whole-House Supply Ventilation



ecovent[®]

Cost Effective, Spot Ventilation
Solution



WhisperRecessed[®] LED
VENTILATION FAN

Ideal Design Solution



ERV / BALANCED STRATEGY



BalancedHome
Balanced Ventilation For
Single Family Homes



Intelli-Balance
Balanced Air Solution For
Multifamily Homes



WhisperComfort 60
Economical and Easy to Install
Balanced Air Solution



Q.SelectCycler
WHOLE HOUSE VENTILATION SYSTEM
Whole House Ventilation
Solution

SMART CONTROLS



SWDGET
POWER TO LIVE SMART
Modular Smart Devices



WhisperControl
Condensation Sensor Solution

ATMOSPHERE



ATMOSPHERE
Dryer Exhaust Duct Power
Ventilators & Inline Fans

Ventilation Fans





Underperforming ventilation fans can expose occupants to poor indoor air quality and put your business at risk. Issues like non-compliance, warranty claims, callbacks, legal liabilities, and damage to reputations can arise.

Panasonic's powerful ventilation fans effectively eliminate stale air, ensuring homes meet code requirements consistently.

Eliminate risks with Panasonic high performing ventilation fans.

One Fan

FV-0511VK3 50-80-110 CFM 4" or 6" Duct
FV-0511VKS3 30 to 110 CFM 4" or 6" Duct
FV-1115VK3 110-130-150 CFM 6" Duct
FV-0511VKS3S 30 to 110 CFM 4" or 6" Duct



One Fan/Light

FV-0511VKL3 50-80-110 CFM 4" or 6" Duct
FV-0511VKSL3 30 to 110 CFM 4" or 6" Duct
FV-1115VKL3 110-130-150 CFM 6" Duct
FV-0511VKSL3K 30 to 110 CFM 4" or 6" Duct



KEY FEATURES

Increased Energy Efficiency

Comply with the more stringent ENERGY STAR® criteria of 11.4 CFM/watt with the improved DC motor and overall design enhancements.

Designer Grille Options

Sharper, cleaner lines on the traditional grille and two new architectural grille designs for a more elegant appeal (FV-0511VKSL3K, FV-0511VKS3S).

Expanded True Flow Performance

HVI-certified performance at 0.5" w.g., exceeds industry standards and helps you build beyond expectations.

WiFi Module

Responds automatically to poor air conditions. Communicates with other ventilation devices, including supply fans and energy recovery ventilators, to manage indoor air quality more efficiently.

LED Lighting - (Lighted Models)

Five color changing temperature light module for the architectural model provides the option to match any desired lighting levels. FV-0511VKSL3K (3000K, 3500K, 4000K, 5000K, 6000K) with 1,000 Lumen.



Flex-ZFast[®]



CALGreen





Wi-Fi Module
(WP100PBA)



SmartAction[®] Motion Sensor + Condensation Sensor (FV-CMVK3)




Multi-Speed with Time Delay** (FV-VS15VK1)
(Included with FV-0511VKS3)



SmartAction[®] Motion Sensor**
(FV-MSVK1)



Condensation Sensor:**
RH sensitivity adjustment (30%-80%) (FV-CSVK1)





Flex-Z Fast[®]:
Single-hinged Flex-Z Fast[®] bracket provides flexible, fast and easy installation



LED Lighting (For Lighted Models Only)
JA8 compliant for CA Title 24/50,000 hours rated average life. Standard fan/light models feature a warm white LED light. All Architectural models feature a five color changing temperature LED light.

Plug 'N Play Receptacles & Pick-A-Flow[®] Switch

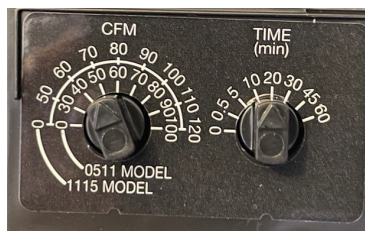

SUGGESTED PRODUCTS



OR

20/40/60 Control Switch
S16008WA



Auxiliary Control Switch
S16009WA



Temperature, Humidity & Motion Sensor
WI006UWA



Flex-Z Fast[®]



CALGreen



**Optional add-on feature with FV-0511VK3 and FV-1115VK3

Specifications															
Duct Diameter (inches)															
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5		
	Air Volume (CFM)	110	110	110	109	100	100	100	100	90	90	90	90		
	Noise (sones)	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---		
	Power Consumption (Watts)	6.7	12.1	17.0	23.0	5.5	10.5	15.4	20.5	4.9	9.7	14.3	19.3		
	Energy Efficiency (CFM/Watt)	16.7	9.3	6.6	4.8	18.5	9.8	6.6	5.0	18.4	9.5	6.5	4.7		
	Speed (RPM)	595	887	1089	1261	580	892	1097	1260	572	898	1102	1283		
	Amps (Current)	0.11	0.20	0.27	0.36	0.10	0.18	0.25	0.32	0.09	0.17	0.24	0.31		
	MAX. Amps (Current)														

Specifications															
Duct Diameter (inches)															
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5		
	Air Volume (CFM)	110	110	110	104	100	100	100	100	90	90	90	89		
	Noise (sones)	<0.3	0.8	---	---	<0.3	0.7	---	---	<0.3	0.7	---	---		
	Power Consumption (Watts)	9.7	15.2	21.0	24.7	7.8	13.0	18.0	23.5	6.6	11.6	16.2	21.0		
	Energy Efficiency (CFM/Watt)	11.5	7.3	5.3	4.2	12.9	7.8	5.6	4.3	13.6	7.7	5.6	4.2		
	Speed (RPM)	782	1031	1214	1349	747	1007	1189	1349	714	993	1170	1333		
	Amps (Current)	0.16	0.24	0.33	0.38	0.14	0.22	0.29	0.37	0.12	0.20	0.26	0.33		
	MAX. Amps (Current)														

Specifications															
Duct Diameter (inches)															
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5		
	Air Volume (CFM)	110	110	110	104	100	100	100	100	90	90	90	88		
	Noise (sones)	<0.3	0.8	---	---	<0.3	0.7	---	---	<0.3	0.7	---	---		
	Power Consumption (Watts)	9.7	15.2	21.0	24.7	7.8	13.0	18.0	23.5	6.6	11.6	16.2	21.0		
	Energy Efficiency (CFM/Watt)	11.5	7.3	5.3	4.2	12.9	7.8	5.6	4.3	13.6	7.7	5.6	4.2		
	Speed (RPM)	782	1031	1214	1349	747	1007	1189	1349	714	993	1170	1333		
	Amps (Current)	0.16	0.24	0.33	0.38	0.14	0.22	0.29	0.37	0.12	0.20	0.26	0.33		
	MAX. Amps (Current)														

WhisperGreen® Select (Fan Only)																								
Base Fan / Fan with built-in multi-speed																								
FV-0511VK3 / FV-0511VKS3																								
6"																								
	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.4	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---
	4.4	9.2	13.2	17.6	4.0	8.2	12.2	16.3	3.6	7.4	11.1	15.0	3.4	7.0	9.9	13.3	3.0	6.2	8.7	12.0	2.8	5.5	7.9	11.4
	18.4	8.8	6.1	4.6	17.7	8.7	5.9	4.4	16.8	8.2	5.5	4.2	14.9	7.2	5.3	4.0	13.6	6.6	4.7	3.6	10.8	5.7	4.0	3.2
	569	908	1109	1281	565	902	1121	1283	570	906	1120	1293	575	933	1127	1296	563	921	1126	1294	587	930	1123	1300
	0.08	0.16	0.22	0.28	0.08	0.14	0.20	0.27	0.07	0.13	0.19	0.24	0.07	0.12	0.17	0.22	0.06	0.11	0.15	0.20	0.06	0.10	0.14	0.19
0.36																								

WhisperGreen® Select (Fan Only)																								
Base Fan / Fan with built-in multi-speed																								
FV-0511VK3																								
4"																								
	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	0.7	---	---	<0.3	0.7	---	---	<0.3	0.7	---	---	<0.3	0.6	---	---	<0.3	0.6	---	---	<0.3	0.6	---	---
	5.6	10.6	14.7	19.4	5.1	9.3	13.4	17.0	4.4	8.1	11.7	15.5	3.8	7.3	10.4	13.6	3.4	6.3	9.3	12.0	2.9	5.6	8.4	11.5
	14.2	7.7	5.4	4.1	14.0	7.6	5.3	4.2	13.8	7.6	5.2	3.9	13.5	7.0	5.0	3.8	12.9	6.9	4.6	3.6	10.5	5.7	3.8	3.0
	684	985	1166	1340	672	964	1164	1317	654	956	1148	1324	630	946	1145	1313	619	938	1142	1299	606	939	1141	1304
	0.10	0.18	0.24	0.31	0.09	0.16	0.22	0.27	0.08	0.14	0.19	0.25	0.07	0.13	0.17	0.22	0.66	0.11	0.16	0.20	0.58	0.10	0.14	0.19
0.66																								

WhisperGreen® Select (Fan Only)																								
Base Fan / Fan with built-in multi-speed																								
FV-0511VKS3																								
4"																								
	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	0.7	---	---	<0.3	0.7	---	---	<0.3	0.7	---	---	<0.3	0.6	---	---	<0.3	0.6	---	---	<0.3	0.6	---	---
	5.6	10.6	14.7	19.4	5.1	9.3	13.4	17.0	4.4	8.1	11.7	15.5	3.8	7.3	10.4	13.6	3.4	6.3	9.3	12.0	2.9	5.6	8.4	11.5
	14.2	7.7	5.4	4.1	14.0	7.6	5.3	4.2	13.8	7.6	5.2	3.9	13.5	7.0	5.0	3.8	12.9	6.9	4.6	3.6	10.5	5.7	3.8	3.0
	684	985	1166	1340	672	964	1164	1317	654	956	1148	1324	630	946	1145	1313	619	938	1142	1299	606	939	1141	1304
	0.10	0.18	0.24	0.31	0.09	0.16	0.22	0.27	0.08	0.14	0.19	0.25	0.07	0.13	0.17	0.22	0.66	0.11	0.16	0.20	0.58	0.10	0.14	0.19
0.66																								

Specifications																	
Duct Diameter (inches)																	
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	
	Air Volume (CFM)	150	150	148	121	130	130	130	128	120	120	120	120	110	110	110	
	Noise (sones)	<0.3	0.6	---	---	<0.3	0.5	---	---	<0.3	0.4	---	---	<0.3	0.3	---	
	Power Consumption (Watts)	11.6	17.4	23.5	24.4	8.8	14.8	20.0	25.0	7.5	13.0	18.5	24.4	6.7	12.1	17.0	
	Energy Efficiency (CFM/Watt)	13.1	8.7	6.4	5.0	15.0	9.2	6.7	5.2	16.9	9.8	6.8	5.2	16.7	9.3	6.6	
	Speed (RPM)	680	894	1082	1253	638	898	1091	1259	626	892	1098	1264	595	887	1089	
	Amps (Current)	0.19	0.27	0.36	0.38	0.15	0.24	0.32	0.39	0.14	0.22	0.30	0.39	0.11	0.20	0.27	
	MAX. Amps (Current)																

Specifications																	
Duct Diameter (inches)																	
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5				
	Air Volume (CFM)	110	110	110	109	100	100	100	100	90	90	90	90				
	Noise (sones)	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---				
	Power Consumption (Watts)	7.4	12.9	18.1	23.8	6.2	11.2	16.6	21.7	5.4	10.6	15.0	19.8				
	Energy Efficiency (CFM/Watt)	15.2	8.6	6.2	4.6	16.4	9.1	6.3	4.7	17.3	8.8	6.2	4.7				
	Speed (RPM)	641	932	1120	1282	629	930	1129	1299	620	936	1127	1294				
	Amps (Current)	0.12	0.21	0.28	0.37	0.11	0.19	0.27	0.34	0.10	0.18	0.25	0.32				
	MAX. Amps (Current)																

Specifications																	
Duct Diameter (inches)																	
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5				
	Air Volume (CFM)	110	110	110	99	100	100	100	100	90	90	90	90				
	Noise (sones)	<0.3	0.6	---	---	<0.3	0.6	---	---	<0.3	0.5	---	---				
	Power Consumption (Watts)	10.7	16.5	22.1	24.8	8.3	14.2	18.8	23.9	7.1	12.4	17.1	21.7				
	Energy Efficiency (CFM/Watt)	10.5	6.8	5.1	4.1	12.2	7.2	5.4	4.2	12.8	7.5	5.4	4.2				
	Speed (RPM)	829	1077	1241	1365	783	1047	1212	1367	751	1022	1203	1352				
	Amps (Current)	0.18	0.26	0.34	0.38	0.15	0.23	0.30	0.37	0.12	0.21	0.28	0.34				
	MAX. Amps (Current)																

WhisperGreen® Select (Fan Only)

Base Fan + Multi-speed module

FV-1115VK3 + FV-VS15VK1

6"

	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	109	100	100	100	100	90	90	90	90	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50
	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.4		
	23.0	5.5	10.5	15.4	20.5	4.9	9.7	14.3	19.3	4.4	9.2	13.2	17.6	4.0	8.2	12.2	16.3	3.6	7.4	11.1	15.0	3.4	7.0	10.4	13.3
	4.8	18.5	9.8	6.6	5.0	18.4	9.5	6.5	4.7	18.4	8.8	6.1	4.6	17.7	8.7	5.9	4.4	16.8	8.2	5.5	4.2	15.8	7.7	5.1	4.2
	1261	580	892	1097	1260	572	898	1102	1283	569	908	1109	1281	565	902	1121	1283	570	906	1120	1293	583	918	1131	1290
	0.36	0.10	0.18	0.25	0.32	0.09	0.17	0.24	0.31	0.08	0.16	0.22	0.28	0.08	0.14	0.20	0.27	0.07	0.13	0.19	0.24	0.07	0.12	0.18	0.22
0.39																									

WhisperGreen® Select

Base Fan with multi-speed module

FV-0511VKS3S

6"

	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---
	4.7	9.5	13.2	18.1	4.3	8.6	12.4	16.7	3.9	7.7	11.0	15.0	3.4	7.2	10.3	13.4	3.1	6.2	9.1	12.4	2.9	5.6	8.2	11.6
	17.3	8.6	6.1	4.5	16.8	8.4	5.8	4.3	16.1	8.1	5.7	4.2	15.2	7.2	5.0	3.9	13.5	6.8	4.7	3.5	11.2	5.9	4.1	3.3
	601	928	1111	1294	592	920	1122	1298	590	917	1118	1304	577	930	1130	1303	577	926	1147	1317	585	934	1130	1300
	0.09	0.16	0.22	0.29	0.08	0.15	0.21	0.27	0.07	0.13	0.19	0.24	0.07	0.12	0.17	0.22	0.06	0.11	0.15	0.20	0.06	0.10	0.14	0.19
0.37																								

WhisperGreen® Select

Base Fan with multi-speed module

FV-0511VKS3S

4"

	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	0.5	---	---	<0.3	0.5	---	---	<0.3	0.4	---	---	<0.3	0.4	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---
	6.2	11.1	15.1	19.6	5.4	9.8	13.8	17.5	4.7	8.5	11.5	15.8	4.0	7.8	10.9	13.9	3.3	6.3	9.1	12.4	3.0	5.8	8.5	11.6
	13.0	7.4	5.3	4.1	13.1	7.5	5.4	4.1	13.4	7.4	5.5	4.1	13.6	7.0	5.0	4.1	12.4	6.7	4.7	3.5	10.6	5.9	4.2	3.4
	726	1005	1192	1350	708	996	1184	1344	677	970	1155	1329	645	974	1172	1322	617	942	1149	1322	612	949	1147	1307
	0.11	0.19	0.25	0.31	0.10	0.17	0.23	0.29	0.09	0.15	0.20	0.26	0.08	0.14	0.19	0.24	0.07	0.11	0.16	0.21	0.06	0.11	0.15	0.20
0.38																								

Specifications															
Duct Diameter (inches)															
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5		
	Air Volume (CFM)	110	110	110	106	100	100	100	100	90	90	90	90		
	Noise (sones)	<0.3	<0.3	---	---	<0.3	0.3	---	---	<0.3	<0.3	---	---		
	Power Consumption (Watts)	7.1	12.4	18.1	22.7	6.1	11.7	16.5	21.9	5.5	10.6	15.2	19.4		
	Energy Efficiency (CFM/Watt)	15.6	8.9	6.2	4.7	16.5	8.6	6.1	4.6	16.4	8.5	6.0	4.7		
	Speed (RPM)	644	945	1138	1304	621	948	1132	1297	614	943	1131	1296		
	Amps (Current)	0.12	0.21	0.30	0.36	0.11	0.19	0.26	0.34	0.10	0.18	0.24	0.31		
	MAX. Amps (Current)														

Specifications															
Duct Diameter (inches)															
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5		
	Air Volume (CFM)	110	110	110	99	100	100	100	100	90	90	90	90		
	Noise (sones)	<0.3	0.6	---	---	<0.3	0.6	---	---	<0.3	0.5	---	---		
	Power Consumption (Watts)	10.7	16.5	22.1	24.8	8.7	14.6	19.1	24.3	7.2	12.6	17.2	21.9		
	Energy Efficiency (CFM/Watt)	10.3	6.7	5.1	4.0	11.7	7.0	5.3	4.2	12.7	7.4	5.4	4.2		
	Speed (RPM)	834	1079	1240	1373	801	1060	1223	1372	759	1031	1203	1360		
	Amps (Current)	0.17	0.26	0.34	0.38	0.15	0.24	0.31	0.38	0.13	0.21	0.28	0.35		
	MAX. Amps (Current)														

Specifications																	
Duct Diameter (inches)																	
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	
	Air Volume (CFM)	150	150	147	115	130	130	130	117	120	120	119	115	110	110	110	
	Noise (sones)	0.4	0.8	---	---	<0.3	0.5	---	---	<0.3	0.4	---	---	<0.3	0.3	---	
	Power Consumption (Watts)	12.5	19.2	24.4	24.3	9.6	15.8	21.3	24.2	8.1	13.7	18.6	23.8	6.9	12.3	17.4	
	Energy Efficiency (CFM/Watt)	12.1	7.9	6.0	4.8	13.7	8.6	6.2	4.9	15.1	9.1	6.5	4.9	16.4	9.3	6.6	
	Speed (RPM)	729	959	1132	1289	677	944	1136	1288	657	931	1127	1298	635	930	1120	
	Amps (Current)	0.21	0.3	0.39	0.39	0.16	0.26	0.34	0.38	0.14	0.23	0.31	0.38	0.13	0.21	0.29	
	MAX. Amps (Current)																

WhisperGreen® Select (Fan + Light)																								
Base fan with multi-speed + 5 CCT LED Light + Night Light																								
FV-0511VKSL3K																								
6"																								
	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---	<0.3	<0.3	---	---
	4.8	9.5	13.7	17.9	4.5	8.7	12.7	16.5	4.0	8.0	11.4	14.7	3.7	7.2	10.1	13.5	3.2	6.2	9.2	12.6	3.0	5.8	8.5	11.6
	16.9	8.5	5.9	4.5	15.8	8.2	5.6	4.3	15.3	7.7	5.3	4.2	13.7	7.2	5.3	4.1	13.2	7.0	4.8	3.6	10.7	5.7	4.2	3.2
	608	933	1126	1298	610	928	1139	1300	611	946	1143	1292	610	937	1132	1301	589	929	1139	1322	599	950	1148	1309
	0.09	0.16	0.22	0.28	0.08	0.15	0.21	0.27	0.08	0.14	0.19	0.24	0.07	0.13	0.17	0.23	0.06	0.11	0.16	0.21	0.06	0.10	0.15	0.20
0.36																								

WhisperGreen® Select (Fan + Light)																								
Base fan with multi-speed + 5 CCT LED Light + Night Light																								
FV-0511VKSL3K																								
4"																								
	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	0.5	---	---	<0.3	0.4	---	---	<0.3	0.4	---	---	<0.3	0.4	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---
	6.4	11.2	15.1	19.7	5.6	9.6	14.0	17.8	4.6	8.5	11.7	15.7	3.9	7.5	10.4	13.7	3.4	6.5	9.4	12.4	2.9	5.7	8.3	11.7
	12.6	7.3	5.3	4.1	12.6	7.4	5.1	3.9	13.2	7.1	5.1	4.0	13.0	6.7	4.9	3.7	12.5	6.5	4.6	3.4	11.0	5.6	3.8	2.7
	735	1008	1188	1354	712	981	1187	1342	675	977	1163	1327	628	959	1152	1319	612	950	1148	1312	605	940	1140	1310
	0.11	0.19	0.25	0.32	0.10	0.16	0.23	0.28	0.09	0.15	0.20	0.25	0.07	0.13	0.18	0.23	0.07	0.12	0.16	0.21	0.06	0.10	0.14	0.19
0.38																								

WhisperGreen® Select (Fan + Light)																									
Base fan /Fan with multi-speed +Warm White LED Light + Night Light																									
FV-1115VKL3																									
6"																									
	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	108	100	100	100	99	90	90	90	89	80	80	80	77	70	70	70	70	60	60	60	60	50	50	50	50
	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---
	22.8	6.2	11.4	16.5	20.7	5.3	10.4	15.1	19.5	4.7	9.4	13.7	18.2	4.2	8.5	12.8	17.0	4.0	7.7	11.6	15.2	3.5	7.1	10.3	13.6
	4.8	16.7	9.2	6.5	4.9	17.5	9.0	6.3	4.7	17.4	9.0	6.2	4.3	16.9	8.4	5.6	4.2	15.6	8.1	5.4	4.1	14.9	7.3	5.2	4.0
	1291	633	930	1125	1282	604	927	1123	1292	595	920	1124	1305	586	916	1134	1312	602	921	1136	1305	582	929	1133	1310
	0.36	0.12	0.2	0.27	0.34	0.1	0.17	0.25	0.31	0.08	0.16	0.22	0.28	0.08	0.15	0.21	0.27	0.07	0.14	0.19	0.25	0.07	0.12	0.17	0.22
0.39																									

Specifications															
Duct Diameter (inches)															
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5		
	Air Volume (CFM)	110	110	107	104	100	100	100	100	90	90	90	90		
	Noise (sones)	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---		
	Power Consumption (Watts)	7.2	12.6	18.1	22.7	6.0	11.4	16.5	21.6	5.3	10.4	15.0	19.7		
	Energy Efficiency (CFM/Watt)	15.7	9.0	6.0	4.7	17.5	9.3	6.6	4.9	18.0	9.2	6.5	4.8		
	Speed (RPM)	636	915	1123	1285	621	934	1126	1290	605	930	1122	1294		
	Amps (Current)	0.12	0.20	0.28	0.35	0.11	0.19	0.27	0.35	0.10	0.18	0.25	0.32		
	MAX. Amps (Current)														

Specifications															
Duct Diameter (inches)															
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5		
	Air Volume (CFM)	110	110	110	99	100	100	100	100	90	90	90	90		
	Noise (sones)	<0.3	0.7	---	---	<0.3	0.7	---	---	<0.3	0.7	---	---		
	Power Consumption (Watts)	10.5	16.3	22.1	24.8	8.6	13.9	19.2	24.3	7.2	12.7	17.0	21.9		
	Energy Efficiency (CFM/Watt)	10.8	7.0	5.1	4.1	12.2	7.6	5.5	4.3	13.1	7.6	5.6	4.3		
	Speed (RPM)	824	1069	1244	1373	793	1039	1222	1370	754	1033	1199	1359		
	Amps (Current)	0.17	0.26	0.34	0.38	0.15	0.23	0.31	0.38	0.13	0.21	0.28	0.35		
	MAX. Amps (Current)														

WhisperGreen® Select (Fan + Light)

Base Fan / Fan with multi-speed + Warm White LED Light + Night Light

FV-0511VKL3 / FV-0511VKSL3

6"

	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	0.3	---	---	<0.3	<0.3	---	---
	4.6	9.4	13.5	18.2	4.2	8.5	12.5	16.4	3.9	8.0	11.3	15.4	3.5	7.2	10.1	13.7	3.2	6.3	9.0	12.6	2.9	5.6	8.5	11.7
	18.2	9.1	6.3	4.8	17.8	8.8	6.0	4.6	15.5	7.6	5.4	4.0	14.9	7.2	5.3	4.0	13.3	6.8	4.8	3.5	11.0	5.8	3.9	3.0
	591	922	1121	1292	588	920	1129	1292	595	935	1131	1311	587	937	1130	1314	586	934	1138	1325	595	938	1155	1304
	0.09	0.17	0.23	0.30	0.08	0.15	0.21	0.27	0.07	0.14	0.19	0.25	0.07	0.13	0.17	0.22	0.06	0.11	0.16	0.21	0.06	0.10	0.15	0.20
0.35																								

WhisperGreen® Select (Fan + Light)

Base Fan / Fan with multi-speed + Warm White LED Light + Night Light


FV-0511VKL3 / FV-0511VKSL3

4"


	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5	0.1	0.25	0.375	0.5
	80	80	80	80	70	70	70	70	60	60	60	60	50	50	50	50	40	40	40	40	30	30	30	30
	<0.3	0.7	---	---	<0.3	0.7	---	---	<0.3	0.6	---	---	<0.3	0.6	---	---	<0.3	0.5	---	---	<0.3	0.4	---	---
	6.4	11.1	15.0	18.8	5.3	9.6	13.8	17.7	4.7	8.3	11.9	15.8	3.9	7.4	10.7	14.2	3.5	6.4	9.7	13.0	3.1	5.9	9.2	12.0
	13.0	7.6	5.5	4.4	13.3	7.4	5.5	4.0	12.9	7.3	5.1	3.9	13.1	6.8	5.0	3.8	11.9	6.5	4.7	3.5	10.0	5.3	3.6	2.9
	722	1004	1187	1342	693	983	1184	1343	672	966	1169	1331	643	961	1158	1334	628	955	1165	1338	623	969	1158	1327
	0.11	0.18	0.25	0.30	0.10	0.16	0.23	0.28	0.09	0.14	0.20	0.26	0.07	0.13	0.18	0.23	0.07	0.11	0.16	0.21	0.06	0.11	0.15	0.20
0.38																								

WhisperGreen® Select Fan Dimensions


FV-0511VK3

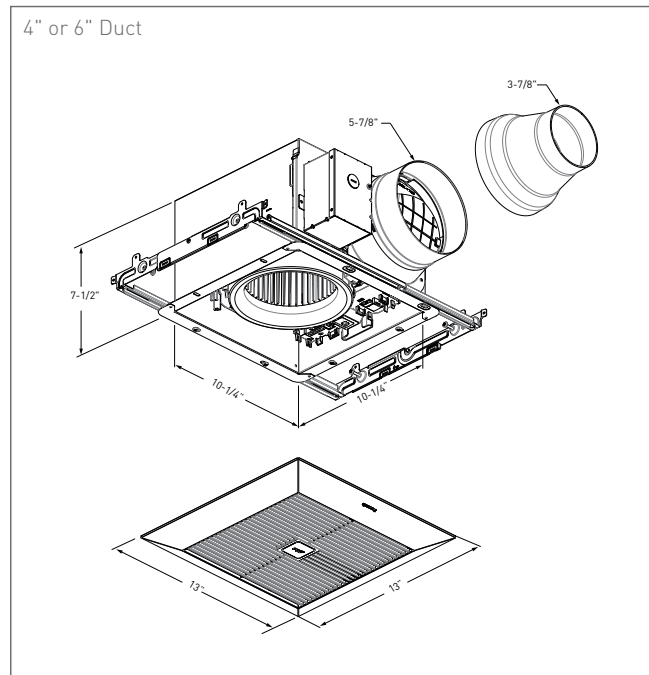


FV-0511VKS3

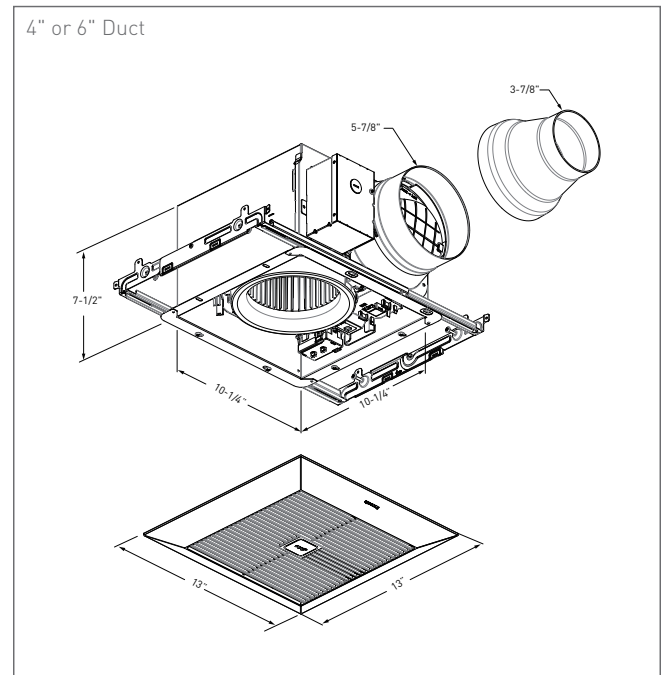


FV-1115VK3

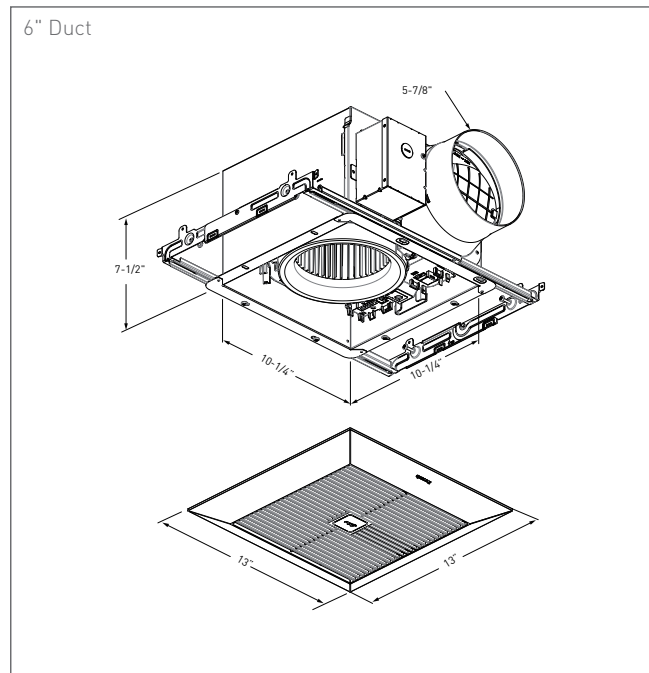


FV-0511VKS3S

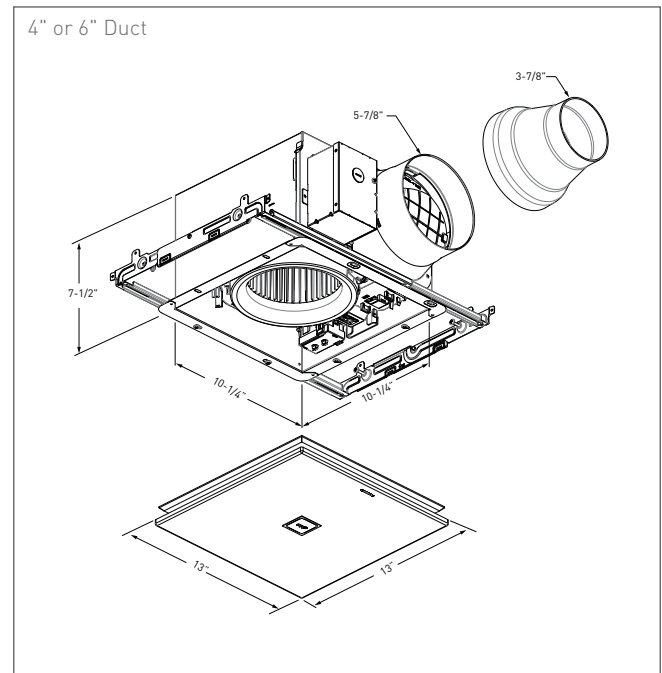


FV-0511VKL3

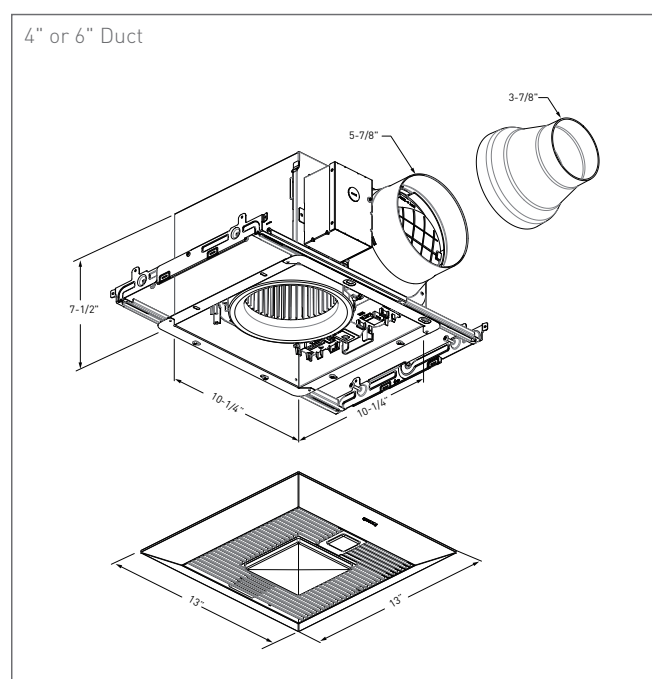


FV-0511VKSL3

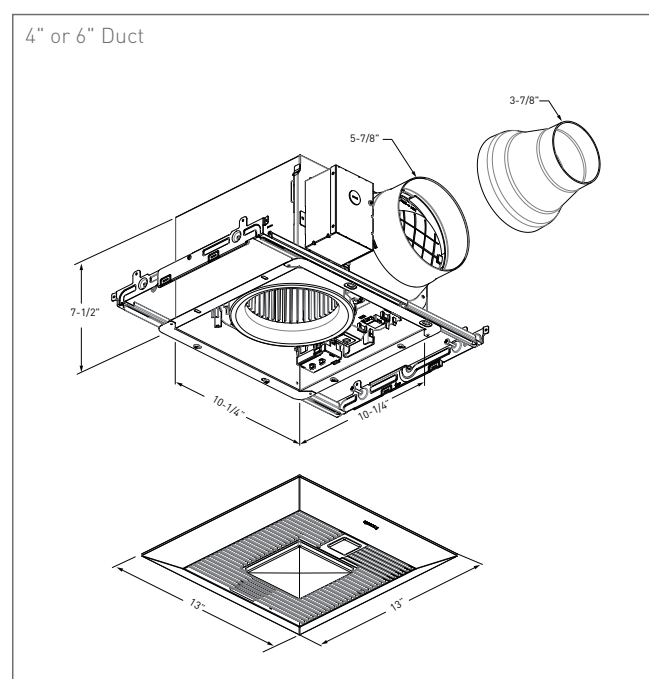

FV-1115VKL3

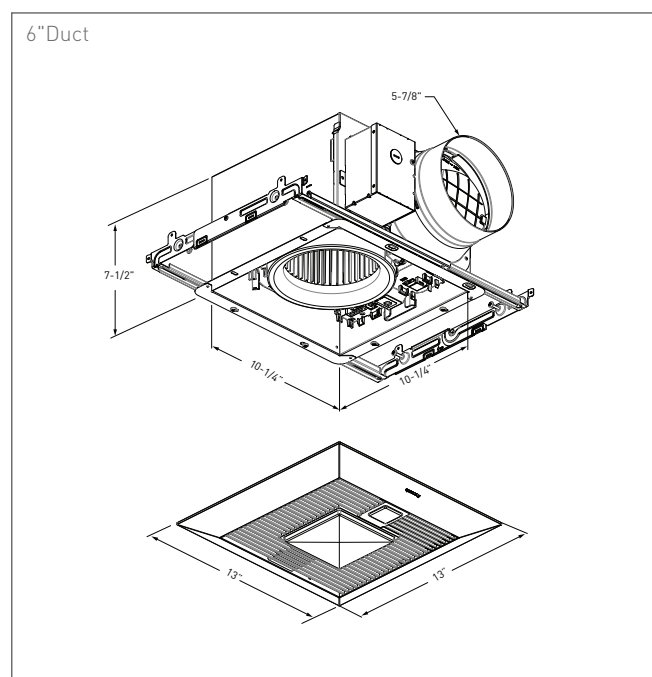

FV-0511VKSL3K

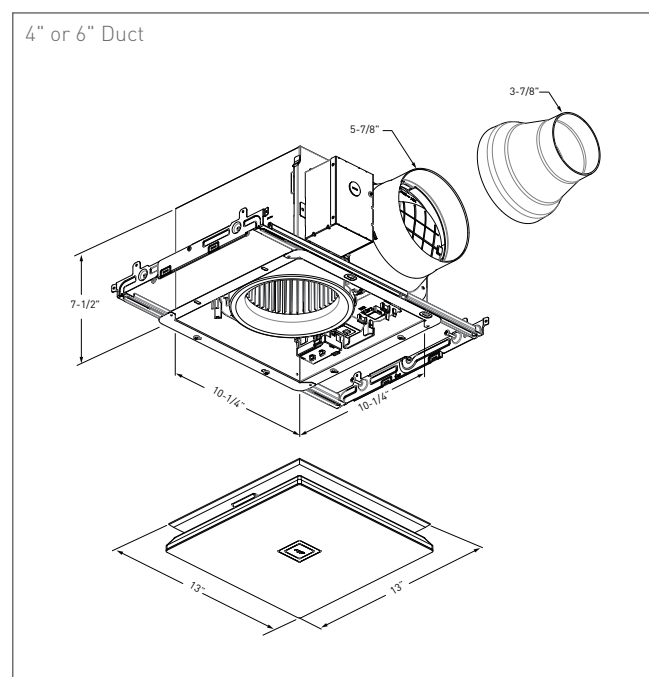

FV-0511VQC1 50-80-110 CFM 4" or 6" Duct
FV-0511VQCL1 50-80-110 CFM 4" or 6" Duct



KEY FEATURES

- Precision spot ventilation fans ideal for use in the bathroom, laundry room, basement or garage
- Revolutionary ECM motor with SmartFlow™ technology for optimum CFM output
- Pick-A-Flow® Airflow Selector (50-80-110 CFM) combined with SmartFlow™ Technology simplifies the selection process and ensures optimum performance to meet code and reduce callbacks
- Dual Sensor Technology (motion & moisture) provides built-in redundancy for the ultimate in automatic moisture and odor control
- Single-hinged Flex-Z Fast® bracket provides flexible, fast & trouble-free installation, even from below the ceiling
- Lighted model (FV-0511VQCL1) incorporates one 10W dimmable LED chip panel with <1W LED night-light for warm, long-life energy efficient illumination (night-light must be wired separately)



Built-in Controls

Three ways the fan can function

- Motion on/motion off
- Motion on/humidity off
- Humidity on/humidity off
- Variable humidity controls from 30-80% relative humidity (RH)
- Adjustable delay timer from 30 seconds to 60 minutes



Pick-A-Flow® Airflow Selector Switch



Flex-Z Fast®

SWDGET

SUGGESTED PRODUCTS



On-Off Switch
S16001WA



IAQ Sensor
WI008UWA

LED Lighting



Includes: 10W Dimmable LED chip panel with <1W LED night/3000 Kelvin Warm White/90CRI/700 lumens/70 LPW/JA8 compliant for CA Title 24/50,000 hours rated average life.



Flex-ZFast[®]




CALGreen




WhisperSense® DC	FV-0511VQC1									FV-0511VQCL1 (Fan/Light)								
Characteristics																		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume [CFM]	110	111	91	80	83	82	50	53	53	110	110	86	80	83	82	50	50	44
Noise [sones]	<0.3	0.9		<0.3	0.6		<0.3	0.4		0.4	0.9		<0.3	0.6		<0.3	0.4	
Power Consumption [Watts]	10.6	16.4	17.1	5.9	10.8	14.5	4.0	7.2	10.5	10.9	16.1	16.8	6.0	11.0	14.6	3.9	7.1	10.0
Energy Efficiency [CFMs/Watt]	10.6	6.9	5.3	13.6	7.7	5.7	12.5	7.4	5.1	10.3	7.0	5.1	13.7	7.7	5.6	14.1	7.8	4.4
Speed	957	1239	1382	821	1172	1351	756	1093	1195	1016	1268	1398	867	1185	1370	768	1097	1315
Amps [Current]	0.18	0.26	0.27	0.11	0.18	0.24	0.07	0.13	0.18	0.18	0.26	0.26	0.11	0.19	0.24	0.07	0.12	0.17
Power Rating [V/Hz]	120/60			120/60			120/60			120/60			120/60			120/60		

WhisperSense® DC Dimensions

FV-0511VQC1

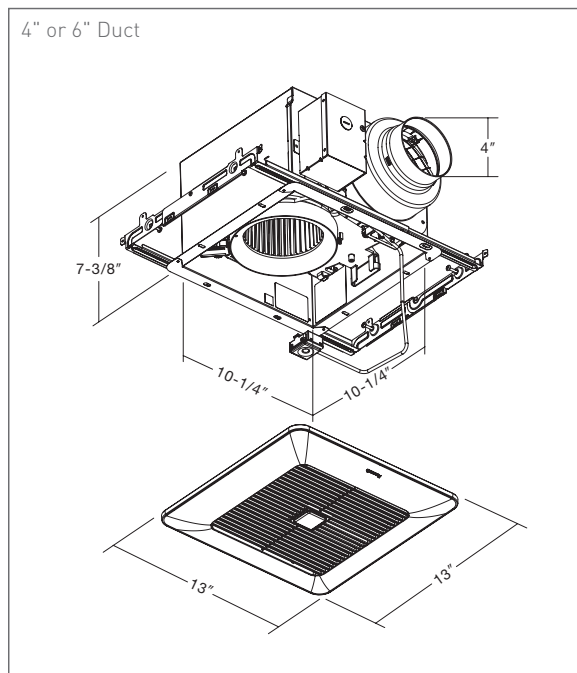

FV-0511VQCL1

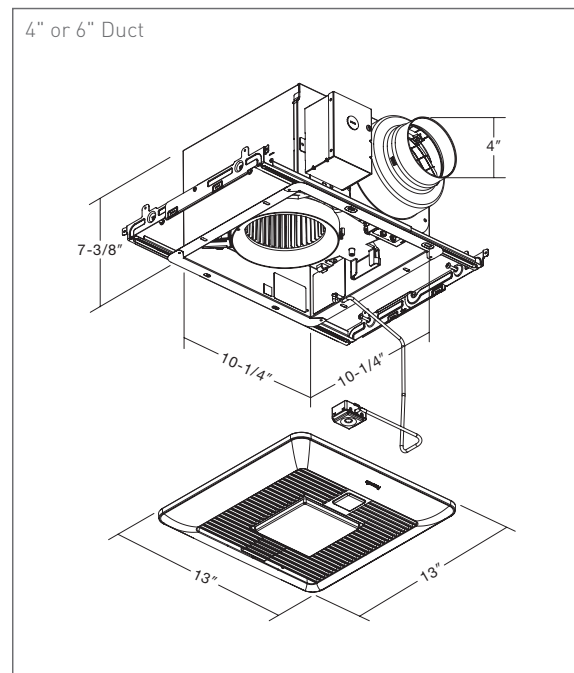

FV-08VRE2 80 CFM 4" or 6" Duct



KEY FEATURES

- Beautiful lighting with 6" aperture and advanced luminaire design
- Includes (1) replaceable, 8W ENERGY STAR 2.0 certified, GU24 base LED lamp, JA8 compliant for CA Title 24 and Title 20
- Quiet, energy efficient and powerful 80 CFM ventilation hidden above the ceiling
- Ideal for use in the bathroom, living room or laundry room
- Complies with ASHRAE 62.2, CALGreen*, Indoor airPlus and JA8 compliant for CA Title24 & Title20

*Complies with CALGreen when controlled by the Panasonic Condensation Sensor Plus



LED Lighting


Includes: 8 Watt GU24 base LED lamp, /2700 Kelvin Warm White/>92CRI/720 lumens/90 LPW/ JA8 compliant for CA Title 24 and Title 20, 25,000 rated average life.

WhisperRecessed® LED	FV-08VRE2	
Characteristics		
Static pressure in inches w.g.	0.1	0.25
Air Volume (CFM)	80	66
Noise (sones)	1.0	0.8
Power Consumption (Watts)	18.5	17.6
Energy Efficiency (CFMs/Watt)	4.4	3.8
Speed	1342	1480
Amps (Current)	0.15	0.15
Power Rating (V/Hz)	120/60	

WhisperRecessed® LED Fan Dimensions

FV-08VRE2

4" or 6" Duct

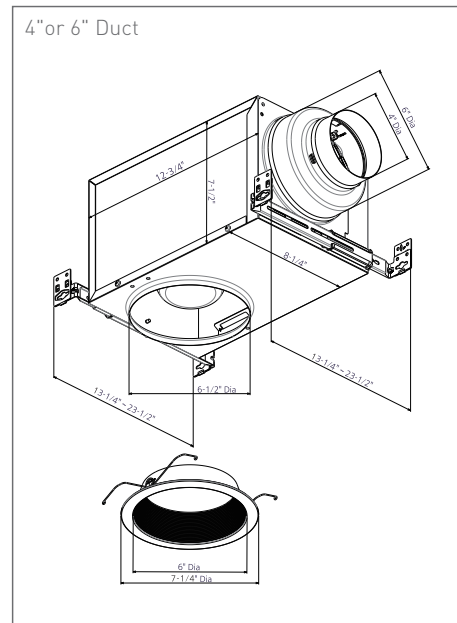

SUGGESTED PRODUCTS



On-Off Switch
S16001WA



**Temperature,
Humidity &
Motion Sensor**
W1006UWA



Spot Ventilation Solution

FV-20VQ3	190 CFM	6" Duct
FV-30VQ3	290 CFM	6" Duct
FV-40VQ4*	390 CFM	6" Duct



KEY FEATURES

- Large volume (190-390) CFM options designed for light commercial applications
- AC motor
- UL listed for tub/shower enclosure when GFCI protected
- Complies with ASHRAE 62.2, Indoor airPlus, EarthCraft and California Title 24

*FV-40VQ4 does not comply with the ENERGY STAR® 4.1 requirement for increased efficiency (CFM/Watt).

Precision Spot Ventilation Solution

FV-0511VQ1	50-80-110 CFM	4" or 6" Duct
FV-0511VQL1	50-80-110 CFM	4" or 6" Duct
FV-1115VQ1	110-130-150 CFM	6" Duct
FV-1115VQL1	110-130-150 CFM	6" Duct



KEY FEATURES

- Precision spot ventilation fans ideal for use in the bathroom, laundry room, basement or garage
- Revolutionary ECM motor with SmartFlow™ technology ensures optimal CFM output
- Powerful CFM output overcomes 0.375" static pressure to ensure code compliant, comfortable homes
- Pick-A-Flow® airflow selector (50-80-110 or 110-130-150 CFM models) combined with SmartFlow™ technology simplifies the selection process and ensures optimum performance to meet code and reduce callbacks
- Lighted models (FV-0511VQL1 / FV-1115VQL1) incorporate one 10W dimmable LED chip panel with <1W LED night-light for warm, long-life energy efficient illumination (night-light must be wired separately)
- Single-hinged Flex-Z Fast® bracket provides flexible, fast and easy installation



Pick-A-Flow® Airflow Selector Switch



Flex-Z Fast®



LED Lighting

Includes: 10W Dimmable LED chip panel with <1W LED night-light/3000 Kelvin Warm White/90CRI/700 lumens/70 LPW/JA8 compliant for CA Title 24/50,000 hours rated average.

WhisperCeiling® (AC)	FV-20VQ3		FV-30VQ3		FV-40VQ4*	
Characteristics						
Static pressure in inches w.g.	0.1	0.25	0.1	0.25	0.1	0.25
Air Volume (CFM)	190	145	290	257	390	356
Noise (sones)	0.8	-	2.0	-	3.0	-
Power Consumption (Watts)	44.5	43.6	64.0	62.0	111.4	109.6
Energy Efficiency (CFMs/Watt)	4.6	3.6	4.5	4.1	3.5	3.3
Speed	761	949	877	990	793	874
Amps (Current)	0.34	0.33	0.53	0.52	0.99	0.98
Power Rating (V/Hz)	120/60		120/60		120/60	

WhisperCeiling® DC	FV-0511VQ1 (Fan/Light)										FV-1115VQ1 (Fan/Light)							
Characteristics																		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	110	110	86	80	83	82	50	50	44	150	144	80	130	131	79	110	110	78
Noise (sones)	0.4	0.9	-	<0.3	0.6	-	<0.3	0.4	-	0.5	0.8	-	<0.3	0.7	-	<0.3	0.5	-
Power Consumption (Watts)	10.9	16.1	16.8	6.0	11.0	14.6	3.9	7.1	10.0	13.0	19.3	14.5	10.3	17.0	14.5	7.7	12.8	14.6
Energy Efficiency (CFMs/Watt)	10.3	7.0	5.1	13.7	7.7	5.6	14.1	7.8	4.4	11.7	7.5	5.5	12.8	7.8	5.4	14.5	8.7	5.3
Speed	1016	1268	1398	867	1185	1370	768	1097	1315	740	958	1124	722	949	1127	679	935	1126
Amps (Current)	0.18	0.26	0.26	0.11	0.19	0.24	0.07	0.12	0.17	0.21	0.30	0.24	0.17	0.27	0.23	0.13	0.22	0.23
Power Rating (V/Hz)	120/60			120/60			120/60			120/60			120/60			120/60		

WhisperCeiling® DC	FV-0511VQ1										FV-1115VQ1							
Characteristics																		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	110	111	91	80	83	82	50	53	53	150	152	85	130	131	85	110	110	85
Noise (sones)	<0.3	0.9	-	<0.3	0.6	-	<0.3	0.4	-	<0.3	0.7	-	<0.3	0.5	-	<0.3	<0.3	-
Power Consumption (Watts)	10.6	16.4	17.1	5.9	10.8	14.5	4.0	7.2	10.5	11.8	20.2	15.0	9.0	15.7	15.0	6.8	12.1	15.0
Energy Efficiency (CFMs/Watt)	10.6	6.9	5.3	13.6	7.7	5.7	12.5	7.4	5.1	12.9	7.6	5.7	14.7	8.5	5.7	16.4	9.2	5.7
Speed	957	1239	1382	821	1172	1351	756	1093	1195	698	925	1110	671	918	1108	636	900	1112
Amps (Current)	0.18	0.26	0.27	0.11	0.18	0.24	0.07	0.13	0.18	0.19	0.31	0.25	0.16	0.25	0.25	0.12	0.20	0.25
Power Rating (V/Hz)	120/60			120/60			120/60			120/60			120/60			120/60		



SUGGESTED PRODUCTS



On-Off Switch
S16001WA



IAQ Sensor
WI008UWA




Flex-ZFast®



WhisperCeiling® Fan Dimensions


FV-20VQ3

6" Duct

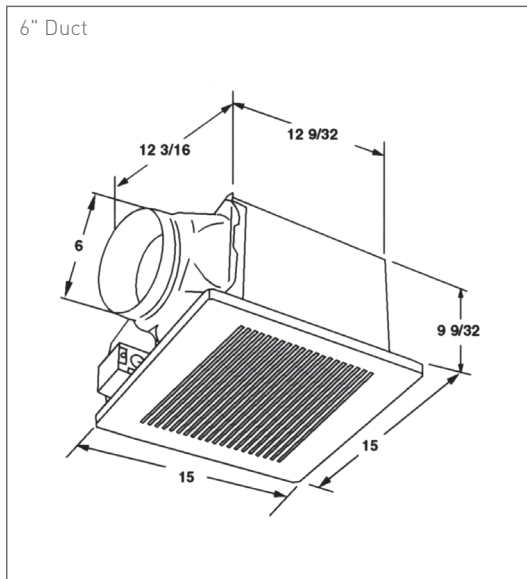


FV-30VQ3

6" Duct

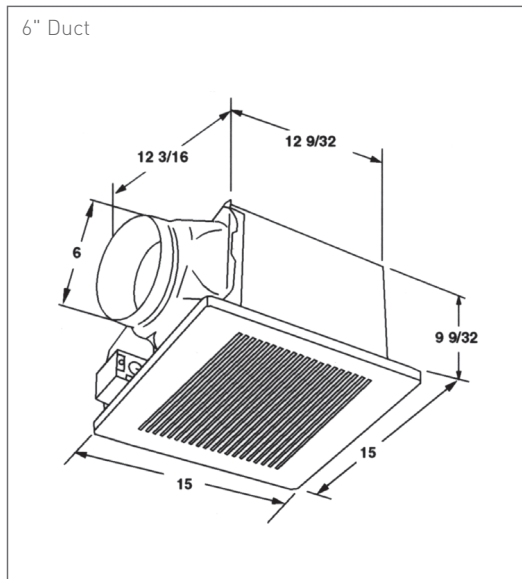


FV-40VQ4

6" Duct

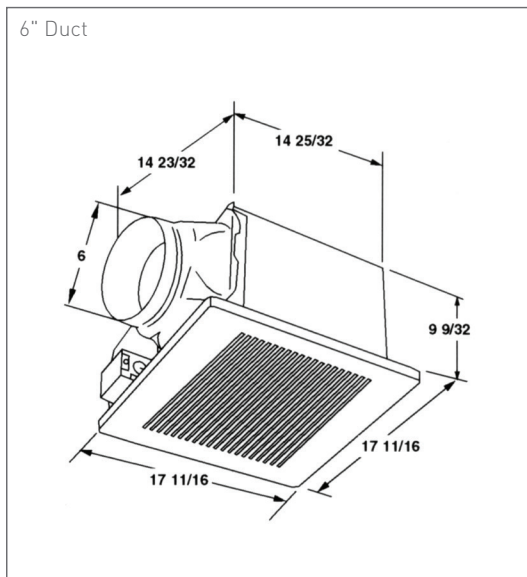


WhisperCeiling® DC Fan Dimensions


FV-0511VQ1

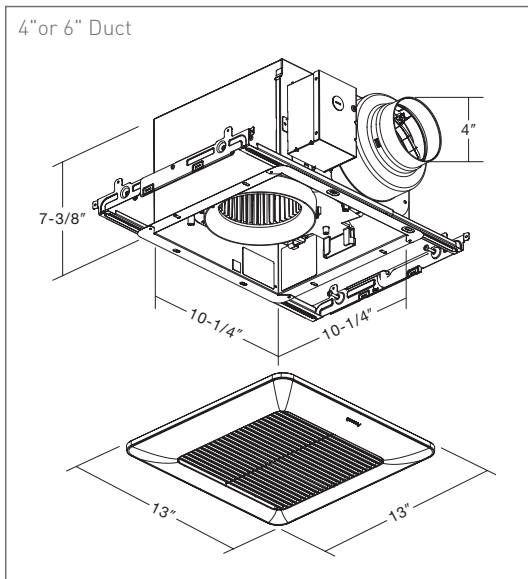


FV-1115VQ1

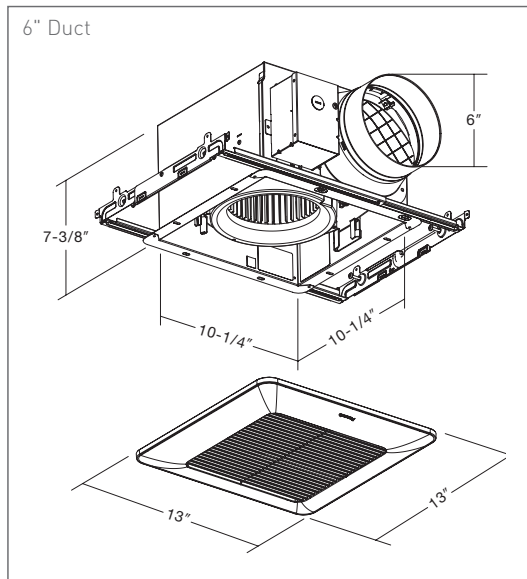

FV-0511VQL1

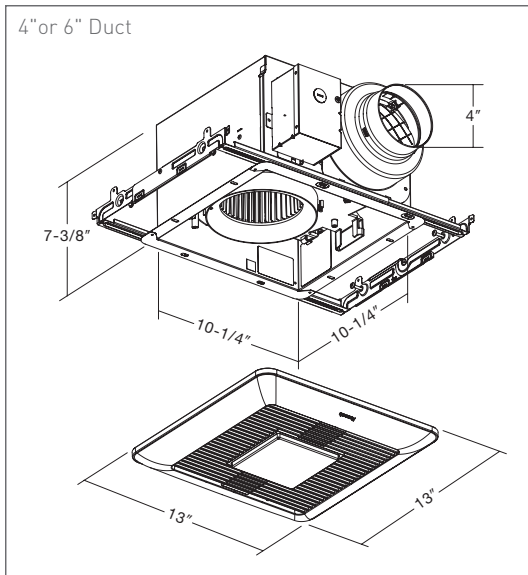

FV-1115VQL1

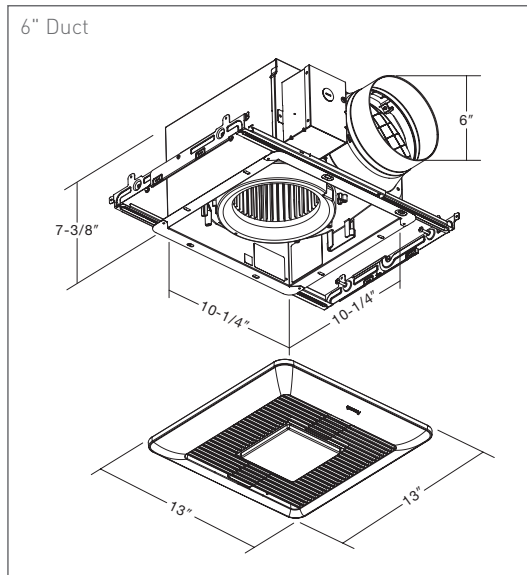

FV-0511VF1 50, 80, or 110 CFM 4" or 3" Duct Fan Only Model

FV-0511VFL1 50, 80 or 110 CFM 4" or 3" Duct Fan / Dimmable LED & Night Light

FV-0511VFC1 50, 80 or 110 CFM 4" or 3" Duct Fan / Condensation Model

FV-0511VFBL1 50, 80 or 110 CFM 4" or 3" Duct Fan / Dimmable LED Night Light & Bluetooth Speaker Model

KEY FEATURES

- Revolutionary ECM motor with SmartFlow™ Technology ensures optimal CFM output
- Built-in Pick-A-Flow® airflow selector allows you to select your required airflow of 50, 80, or 110 CFM with a simple flip of a switch
- Condensation sensor model (FV-0511VFC1) provides hands-free operation and automatic moisture control
- Lighted models (FV-0511VFL1, FV-0511VFBL1) incorporate one 10W dimmable LED chip panel with <1W LED night-light for warm, long-life energy efficient illumination (night-light must be wired separately)
- Single-hinged Flex-Z Fast® bracket provides flexible, fast and easy installation
- Complies with ASHRAE 62.2, IAP and California Title 24
- Bluetooth® speaker model (FV-0511VFBL1) – Equipped with two integrated speakers built into the fan housing, designed to deliver premium, best-in-class audio performance
- QuikConnect™ Technology allows for simple, quick Bluetooth® pairing for up to two (2) iOS or Android devices (FV-0511VFBL1)



Pick-A-Flow® Airflow Selector Switch



Included:
4" to 3" Duct Adapter



Flex-Z Fast®:
Single-hinged
bracket

Installation is as Easy as 1-2-3!



Insert single-hinged
Flex-Z Fast®
installation bracket



Connect the wiring and attach
duct to installation adapter



Install Fan



Dual Integrated Speakers

FV-0511VFBL1 has a one-year warranty on speakers



LED Lighting

Includes 10 Watt dimmable LED chip panel/3000 Kelvin Warm White/90 CRI/700 lumens/70 LPW/JA8 compliant for CA Title 24/50,000 hours rated average life / <1W LED night-light.

WhisperFit [®] DC	FV-0511VF1																	
Characteristics	4"			4"			4"			3"			3"			3"		
Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	110	111	109	80	80	84	50	50	50	110	94	69	80	81	67	50	51	55
Noise (sones)	0.8	1.2	-	0.3	0.8	-	<0.3	0.4	-	2.0	1.5	-	0.8	1.4	-	<0.3	0.9	-
Power Consumption (Watts)	10.2	14.6	17.9	5.9	9.4	13.2	4.0	7.1	10.0	17.1	16.4	13.6	8.8	13.0	13.5	4.6	7.7	10.8
Energy Efficiency (CFM/Watt)	11.0	7.7	6.2	13.9	8.7	6.5	13.5	7.6	5.4	6.6	5.9	5.2	9.4	6.5	5.2	11.5	7.0	5.3
Speed (RPM)	977	1222	1392	820	1142	1349	795	1152	1374	1341	1429	1476	1094	1357	1476	870	1205	1426
Current (amps)	0.18	0.24	0.28	0.11	0.16	0.22	0.08	0.13	0.17	0.27	0.26	0.22	0.15	0.21	0.22	0.09	0.14	0.18
Power Rating (V/Hz)	120/60																	


WhisperFit [®] DC	FV-0511VFL1																	
Characteristics	4"			4"			4"			3"			3"			3"		
Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	110	110	100	80	82	83	50	51	52	110	89	64	80	80	62	50	51	52
Noise (sones)	1.0	1.3	-	0.3	0.7	-	<0.3	0.4	-	1.5	1.4	-	0.7	1.3	-	<0.3	0.7	-
Power Consumption (Watts)	11.0	15.0	16.4	6.6	10.4	13.8	4.2	7.4	10.0	17.4	15.1	12.6	9.3	13.4	12.5	4.9	8.0	10.5
Energy Efficiency (CFM/Watt)	10.2	7.5	6.2	12.4	8.1	6.1	12.5	7.2	5.5	6.4	6.0	5.1	8.9	6.2	5.1	10.8	6.8	5.2
Speed (RPM)	999	1243	1399	890	1207	1400	833	1181	1396	1376	1431	1476	1135	1392	1481	907	1233	1444
Current (amps)	0.18	0.25	0.27	0.12	0.18	0.22	0.08	0.13	0.17	0.28	0.24	0.21	0.16	0.22	0.21	0.09	0.14	0.18
Power Rating (V/Hz)	120/60																	

WhisperFit [®] DC	FV-0511VFC1																	
Characteristics	4"			4"			4"			3"			3"			3"		
Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	110	111	109	80	80	84	50	50	50	110	94	69	80	81	67	50	51	55
Noise (sones)	0.8	1.2	-	0.3	0.8	-	<0.3	0.4	-	2.0	1.5	-	0.8	1.4	-	<0.3	0.9	-
Power Consumption (Watts)	10.2	14.6	17.9	5.9	9.4	13.2	4.0	7.1	10.0	17.1	16.4	13.6	8.8	13.0	13.5	4.6	7.7	10.8
Energy Efficiency (CFM/Watt)	11.0	7.7	6.2	13.9	8.7	6.5	13.5	7.6	5.4	6.6	5.9	5.2	9.4	6.5	5.2	11.5	7.0	5.3
Speed (RPM)	977	1222	1392	820	1142	1349	795	1152	1374	1341	1429	1476	1094	1357	1476	870	1205	1426
Current (amps)	0.18	0.24	0.28	0.11	0.16	0.22	0.08	0.13	0.17	0.27	0.26	0.22	0.15	0.21	0.22	0.09	0.14	0.18
Power Rating (V/Hz)	120/60																	


WhisperFit [®] DC	FV-0511VFB1																	
Characteristics	4"			4"			4"			3"			3"			3"		
Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	110	110	99	80	80	80	50	50	50	110	91	66	80	80	72	50	50	50
Noise (sones)	1.1	1.5	-	0.4	0.9	-	<0.3	0.6	-	2.0	1.5	-	0.8	1.3	-	<0.3	0.8	-
Power Consumption (Watts)	10.9	15.3	16.0	6.7	10.0	13.3	4.3	7.6	9.5	17.6	15.3	13.4	9.0	13.0	13.7	4.9	7.7	10.1
Energy Efficiency (CFM/Watt)	10.0	7.1	6.1	11.9	8.0	6.0	11.6	6.5	5.2	6.2	5.9	4.9	8.8	6.1	5.2	10.2	6.4	4.9
Speed (RPM)	1017	1264	1394	899	1177	1361	811	1156	1350	1363	1417	1464	1104	1352	1455	890	1187	1379
Current (amps)	0.18	0.24	0.26	0.12	0.17	0.22	0.08	0.13	0.17	0.28	0.25	0.22	0.16	0.22	0.22	0.09	0.14	0.17
Power Rating (V/Hz)	120/60																	

WhisperFit® Fan Dimensions


FV-0511VF1

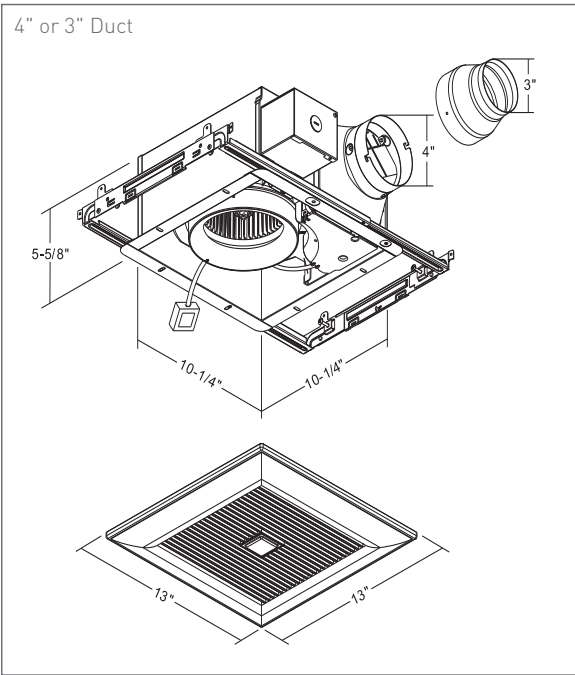

FV-0511VFC1

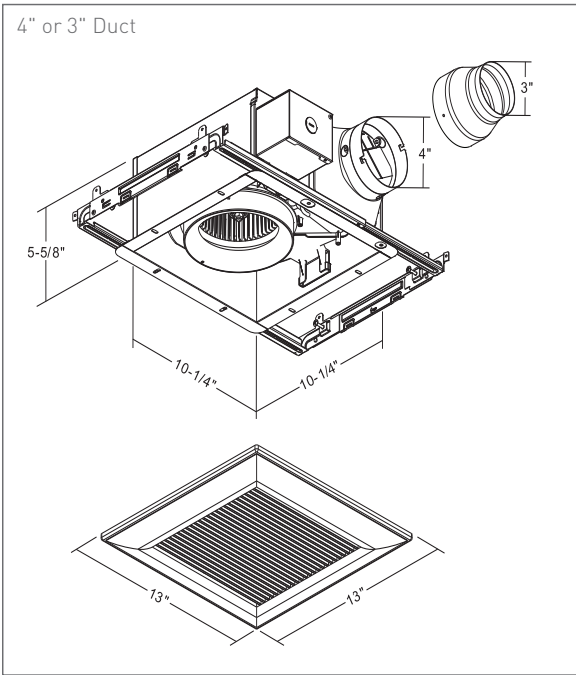

FV-0511VFL1/FV-0511VFBL1

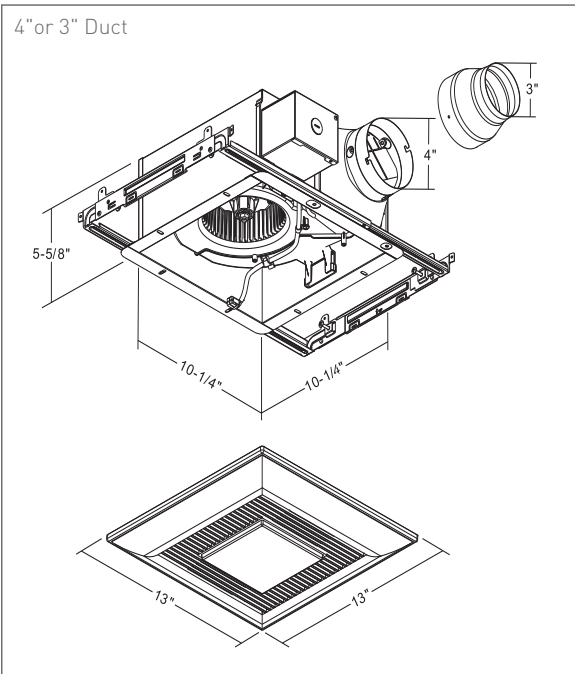

Fan Only

FV-0510VS1	50-80-100 CFM	4" Oval Duct
FV-0510VSC1	50-80-100 CFM	4" Oval Duct
FV-0810VSS1	80 or 100 CFM	4" Oval Duct



KEY FEATURES

- 3-3/8" Housing Depth – lowest profile ENERGY STAR[®] fan available – fits anywhere
- Pick-A-Flow[®] Airflow Selector (50, 80 or 100 CFM) combined with SmartFlow[™] technology simplifies the selection process and ensures optimum performance to meet code and reduce callbacks
- Optional built-in multi-speed Control for ASHRAE 62.2 compliance (FV-0810VSS1 and FV-0810VSSL1 only)
- Optional built-in condensation sensor to control moisture in the bathroom (FV-0510VSC1 and FV-0510VSCL1 only)
- 50 CFM option not included in FV-0810VSS1 and FV-0810VSSL1
- UL approved for ceiling or wall mount – fits in a 2 x 4 stud wall
- Lighted model incorporates one 10W dimmable LED chip panel with <1W LED night-light for warm, long-life energy efficient illumination (night-light must be wired separately)
- Unique L-shaped bracket simplifies installation and provides strong support
- Wall installation reduces cost by eliminating the need to incorporate a radiation damper when penetrating fire-rated ceilings, making it ideal for multifamily applications
- Complies with ASHRAE 62.2, Indoor airPlus, JA8 compliant for CA Title 24 and CALGreen4

Find contractor pack information on page 44.

Fan/Light.

FV-0510VSL1	50-80-100 CFM	4" Oval Duct
FV-0810VSSL1	80 or 100 CFM	4" Oval Duct
FV-0510VSCL1	50-80-100 CFM	4" Oval Duct



FV-JD

Transfer Register Box



- Designed for use with WhisperValue® DC fan/light combinations
- Perfect for room-to-room powered circulation in multi-family projects with ductless heat pumps and mini splits
- Powered 50 CFM transfer at less than 0.3 sone (based on FV-0510VS1)
- 26 gauge steel, fire code rated accessory, sold separately as model
- No need for a radiation damper like on jump ducts
- Works with standard size HVAC registers – 4" x 10" HVAC supply grille
- Complies with ASHRAE 62.2, CALGreen and ENERGY STAR®



Pick-A-Flow® Airflow Selector Switch



Condensation Sensor RH sensitivity (30% – 80% RH) adjustment (FV-0510VSC1 Only)



Optional 4" Oval to 3" Round Duct Adapter (Model #: FV-VS43R)




Optional Multi-Speed Control



LED Lighting

INCLUDES: 10W Dimmable LED chip panel with <1W LED night-light for warm, energy efficient illumination. Panel specifications include: 3000 Kelvin Warm White/90CRI/700 lumens/70 LPW/JA8 compliant for CA Title 24/50,000 hours rated average life.



WhisperValue® 3 3/8" profile

WhisperValue® DC	FV-0810VSS1																				
Characteristics	4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	100	101	83	80	81	75	70	72	70	60	64	65	50	52	52	40	41	42	30	31	30
Noise (sones)	0.9	1.3	-	0.4	0.8	-	<0.3	0.6	-	<0.3	0.6	-	<0.3	0.5	-	<0.3	0.5	-	<0.3	0.5	-
Power Consumption (Watts)	13.4	18.5	18.0	8.5	13.2	16.0	6.5	10.8	15.0	5.3	9.3	13.0	4.5	7.7	12.0	3.8	6.7	10.0	3.4	6.0	9.0
Energy Efficiency (CFMs/Watt)	7.5	5.5	4.6	10.0	6.5	4.7	11.2	6.9	4.7	11.8	7.2	5.0	12.1	7.3	4.3	11.8	6.9	4.2	10.2	6.0	3.3
Speed (RPM)	970	1197	1300	856	1114	1270	805	1088	1260	770	1076	1250	733	1050	1230	723	1037	1215	711	1033	1200
Amps (Current)	0.22	0.29	0.25	0.13	0.20	0.24	0.10	0.16	0.22	0.09	0.15	0.20	0.08	0.13	0.17	0.07	0.11	0.15	0.06	0.10	0.13
Power Rating (V/Hz)	120/60			0.25			120/60			120/60			120/60			120/60			120/60		

WhisperValue® DC	FV-0510VSC1								
Characteristics	4" Oval Duct			4" Oval Duct			4" Oval Duct		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	100	101	83	80	81	75	50	52	52
Noise (sones)	0.9	1.3	-	0.4	0.8	-	<0.3	0.5	-
Power Consumption (Watts)	13.4	18.5	18.0	8.5	13.2	16.0	4.5	7.7	12.0
Energy Efficiency (CFMs/Watt)	7.5	5.5	4.6	10.0	6.5	4.7	12.1	7.3	4.3
Speed (RPM)	970	1197	1300	856	1114	1270	733	1050	1230
Amps (Current)	0.22	0.29	0.25	0.13	0.20	0.24	0.08	0.13	0.17
Power Rating (V/Hz)	120/60			120/60			120/60		

WhisperValue® DC	FV-0510VS1								
Characteristics	4" Oval Duct			4" Oval Duct			4" Oval Duct		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	100	100	83	80	81	75	50	53	52
Noise (sones)	0.9	1.3	-	0.4	0.8	-	<0.3	0.5	-
Power Consumption (Watts)	11.1	16.0	18.0	7.2	11.5	16.0	4.4	7.5	12.0
Energy Efficiency (CFMs/Watt)	9.2	6.4	4.6	11.4	7.2	4.7	12.8	7.9	4.3
Speed (RPM)	902	1121	1300	797	1070	1270	708	1025	1230
Amps (Current)	0.20	0.27	0.25	0.13	0.20	0.24	0.09	0.14	0.17
Power Rating (V/Hz)	120/60			120/60			120/60		



WhisperValue® DC	FV-0810VSSL1 (Fan/Light)																				
Characteristics	4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct			4" Oval Duct		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	100	101	83	80	81	75	70	72	70	60	64	65	50	52	52	40	41	42	30	31	30
Noise (sones)	0.9	1.3	-	0.4	0.8	-	<0.3	0.6	-	<0.3	0.6	-	<0.3	0.4	-	<0.3	0.5	-	<0.3	0.5	-
Power Consumption (Watts)	13.4	18.5	18.0	8.5	13.2	16.0	6.5	10.8	15.0	5.3	9.3	13.0	4.5	7.7	12.0	3.8	6.7	10.0	3.4	6.0	9.0
Energy Efficiency (CFMs/Watt)	7.5	5.5	4.6	10.0	6.5	4.7	11.2	6.9	4.7	11.8	7.2	5.0	12.1	7.3	4.3	11.8	6.9	4.2	10.2	6.0	3.3
Speed (RPM)	970	1197	1300	856	1114	1270	805	1088	1260	770	1076	1250	733	1050	1230	723	1037	1215	711	1033	1200
Amps (Current)	0.22	0.29	0.25	0.13	0.20	0.24	0.10	0.16	0.22	0.09	0.15	0.20	0.08	0.13	0.17	0.07	0.11	0.15	0.06	0.10	0.13
Power Rating (V/Hz)	120/60			120/60			120/60			120/60			120/60			120/60			120/60		

WhisperValue® DC	FV-0510VSL1 (Fan/Light)								
Characteristics	4" Oval Duct			4" Oval Duct			4" Oval Duct		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	100	101	83	80	81	75	50	52	52
Noise (sones)	0.9	1.3	-	0.4	0.8	-	<0.3	0.4	-
Power Consumption (Watts)	13.4	18.5	18.0	8.5	13.2	16.0	4.5	7.7	12.0
Energy Efficiency (CFMs/Watt)	7.5	5.5	4.6	10.0	6.5	4.7	12.1	7.3	4.3
Speed (RPM)	970	1197	1300	856	1114	1270	733	1050	1230
Amps (Current)	0.22	0.29	0.25	0.13	0.20	0.24	0.08	0.13	0.17
Power Rating (V/Hz)	120/60			120/60			120/60		

WhisperValue® DC	FV-0510VSCL1 (Fan/Light)								
Characteristics	4" Oval Duct			4" Oval Duct			4" Oval Duct		
Static pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	100	101	83	80	81	75	50	52	52
Noise (sones)	0.9	1.3	-	0.4	0.8	-	<0.3	0.4	-
Power Consumption (Watts)	13.4	18.5	18.0	8.5	13.2	16.0	4.5	7.7	12.0
Energy Efficiency (CFMs/Watt)	7.5	5.5	4.6	10.0	6.5	4.7	12.1	7.3	4.3
Speed (RPM)	970	1197	1300	856	1114	1270	733	1050	1230
Amps (Current)	0.22	0.29	0.25	0.13	0.20	0.24	0.08	0.13	0.17
Power Rating (V/Hz)	120/60			120/60			120/60		



SUGGESTED PRODUCTS



On-Off Switch
S16001WA



Temperature,
Humidity &
Motion Sensor
WI006UWA




20/40/60
Control Switch
S16008WA




Temperature,
Humidity &
Motion Sensor
WI006UWA

WhisperValue[®] Fan Dimensions


FV-0510VS1

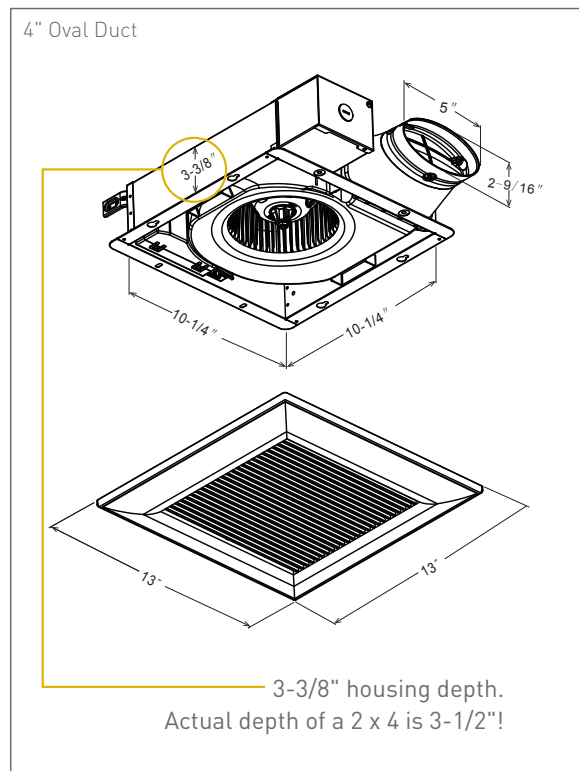


FV-0810VSS1

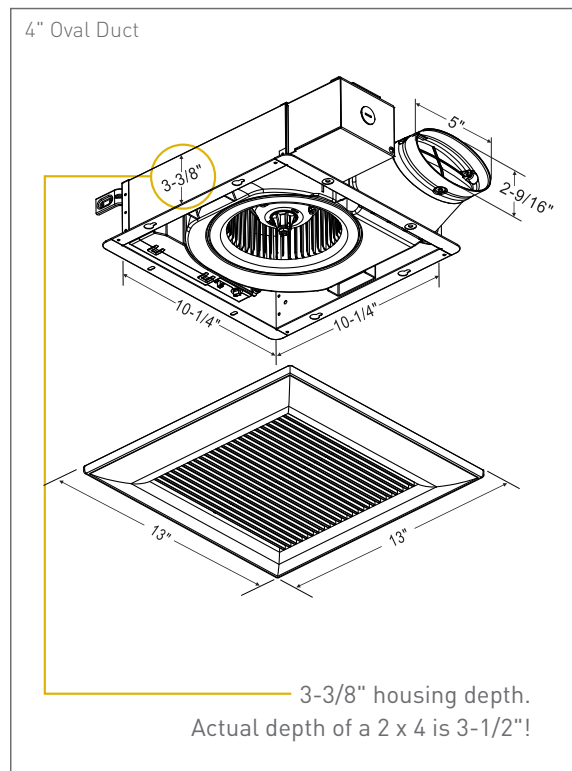

FV-0510VSC1

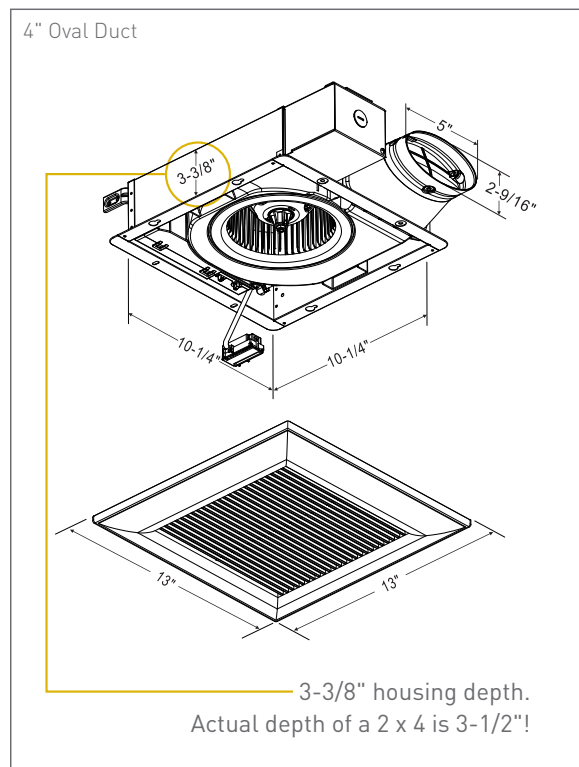


FV-0510VSL1

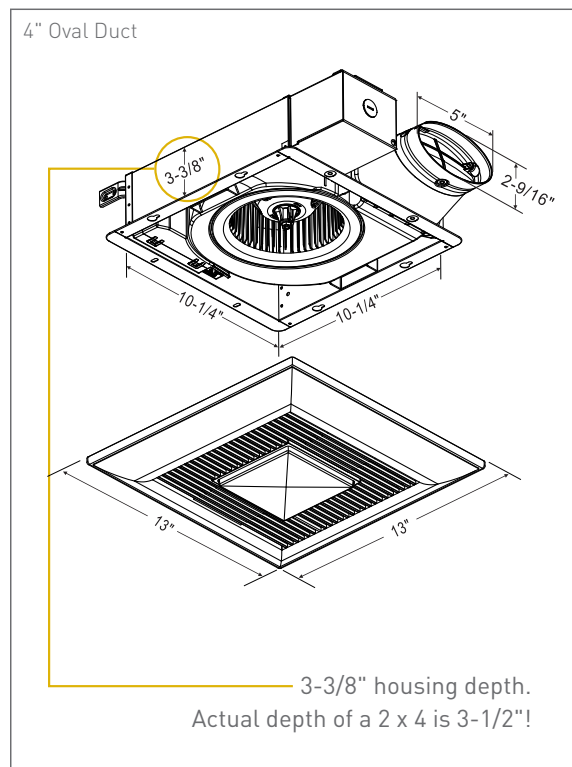

FV-0810VSSL1


4" Oval Duct

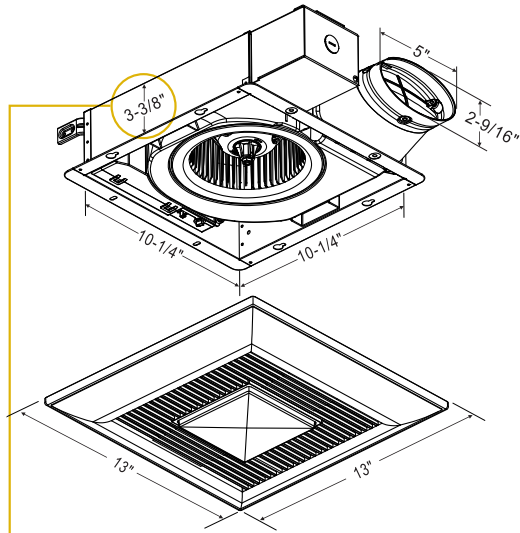

3-3/8" housing depth.
Actual depth of a 2 x 4 is 3-1/2"!

FV-0510VSCL1

4" Oval Duct

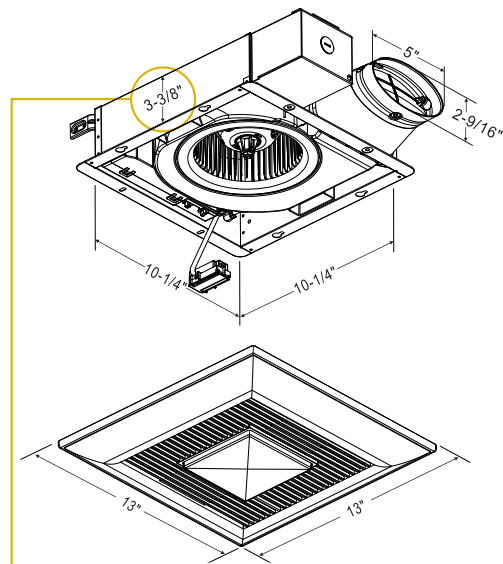

3-3/8" housing depth.
Actual depth of a 2 x 4 is 3-1/2"!

FV-0511VH1 50-80-110 CFM 4" Duct
FV-0511VHL1 50-80-110 CFM 4" Duct



7-3/4"
Depth



KEY FEATURES

- Precision spot ventilation fan/heater combo pairs a powerful ECM motor with SmartFlow™ technology for optimum airflow and CFM output
- Built-in 1600W positive temperature coefficient heater delivers instant warm-up for ultimate comfort and Panasonic's legendary long-life operation
- Unique, adjustable grille with built-in diffuser offers superior directional heating
- Pick-A-Flow® and SmartFlow™ work together to ensure required airflow (50-80-110 CFM), optimal exhaust power, code compliance and reduced callbacks
- Lighted model (FV-0511VHL1) incorporates one 10W dimmable LED chip panel with <1W LED night-light for warm, long-life energy efficient illumination (night-light must be wired separately)
- Flex-Z Fast® bracket enables fast, flexible room-side installation
- Complies with ASHRAE 62.2

LED Lighting:


Includes: 10 Watt dimmable LED chip panel/3000 Kelvin Warm White/≥90CRI/750 lumens/≥70 LPW/JA8 compliant for CA Title 24/50,000 hours rated average life /<1W LED night-light included.




Specifications		WhisperWarm® DC (Fan/Heater)									WhisperWarm® DC (Fan/Heater/Light)								
		FV-0511VH1									FV-0511VHL1								
		4"			4"			4"			4"			4"			4"		
Characteristics (HVI tested data)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
	Air Volume (CFM)	110	112	110	80	82	82	50	51	53	110	111	99	80	81	82	50	52	53
	Noise (sones)	0.7	1.5	-	<0.3	1.0	-	<0.3	0.8	-	0.7	1.5	-	<0.3	1.0	-	<0.3	0.7	-
	Power Consumption (Watts)	12	19.0	26.0	7.7	13.3	18.2	4.7	8.6	12.3	12.4	19.8	26.0	7.4	13.1	18.6	4.7	8.9	12.7
	Energy Efficiency (CFM/Watt)	9.2	5.9	4	10.4	6.2	4.5	10.6	5.9	4.3	8.9	5.6	3.8	10.8	6.2	4.4	10.6	5.9	4.2
	Speed (RPM)	861	1090	1249	736	1008	1173	638	930	1112	885	1115	1265	745	1022	1194	654	943	1130
	Current (amps)	0.24	0.37	0.49	0.16	0.26	0.35	0.10	0.18	0.25	0.25	0.39	0.48	0.15	0.27	0.37	0.10	0.18	0.26
	MAX. Current (amps)	0.50									0.50								
	Power Rating (V/Hz)	120/60									120/60								

WhisperWarm® Fan Dimensions

FV-0511VH1

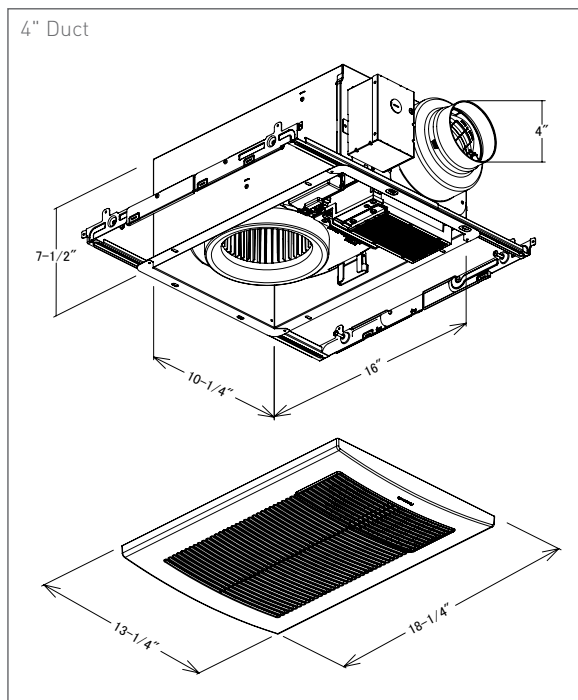

FV-0511VHL1

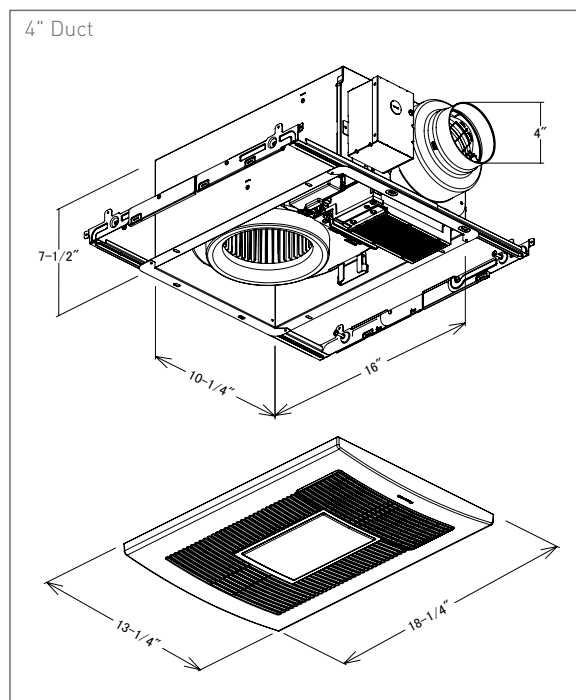

FV-0709VB1: Fan Housing/Motor/Grille

FV-0709VBL1: Fan Housing/LED Light/Motor/Grille



4-3/4"
Depth



KEY FEATURES

- Ideal for new residential construction (high performance / ENERGY STAR® single family production builders and manufactured housing)
- Two-speed 70/90 CFM spot ventilation fan designed to help assure code compliance
- A cost-effective 90 CFM, code-compliant, spot ventilation solution
- Lighted model (FV-0709VBL1), includes a 10-watt dimmable LED chip panel offering a 3000 kelvins warm white color and 800+ lumens for a 50,000-hour rated average life plus a less than 1-watt LED night-light (must be wired separately)
- Provides ventilation verification assurance: ≥50 CFM installed performance
- Junction box and duct adapter come pre-attached to the housing can
- Housing and motor / grille assembled and packed into a single package (FV-0709VB1)
- Housing and motor / grille packaged separately in contractor pack




**Pick-A-Flow® Speed Selector
(70/90 CFM)**

Find contractor pack information on page 45.


EcoVent® DC (Non-Lighted)							EcoVent® DC (Lighted)			
SPECIFICATIONS	FV - 0709VB1 / FV-07VBA1A+FV-07VBB1						FV - 0709VBL1			
Characteristics (HVI tested data for 0.1" S.P.)	Standard Speed			High Speed			Standard Speed		High Speed	
Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375*	0.1	0.25	0.1	0.25
Air Volume (CFM)	70	56	34	90	75	56	70	56	90	75
Noise [sones]	0.7	1.3	-	1.5	1.5	-	0.8	1.5	1.5	2
Power Consumption (Watts)	17.8	17.2	-	22.0	21.4	-	18.5	17.9	23.1	22.5
Energy Efficiency (CFM/Watt)	3.5	2.8	1.7	3.8	3.1	2.3	3.7	3.0	3.8	3.3
Speed (RPM)	907	1200	1425	1019	1266	1450	995	1267	1115	1338
Current (amps)	0.15	0.14	0.15	0.19	0.18	0.17	0.15	0.15	0.20	0.19
MAX. Current(amps)	0.25									
Power Rating [V/Hz]	120/60									

EcoVent® Fan Dimensions

FV-0709VB1 / FV-07VBA1A + FV-07VBB1

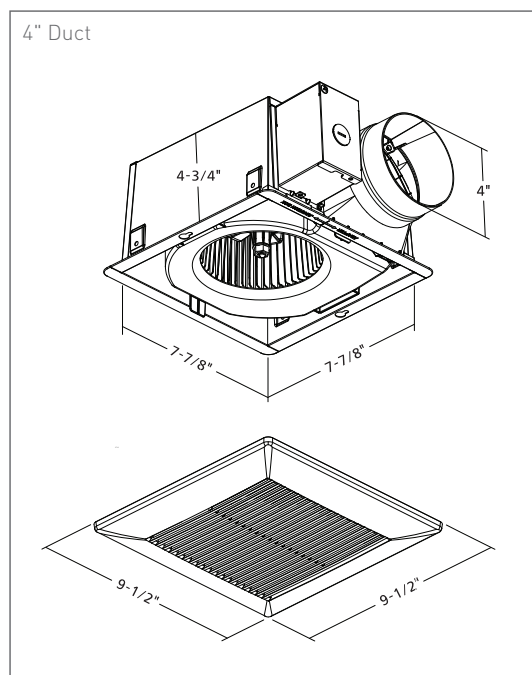


FV-0709VBL1

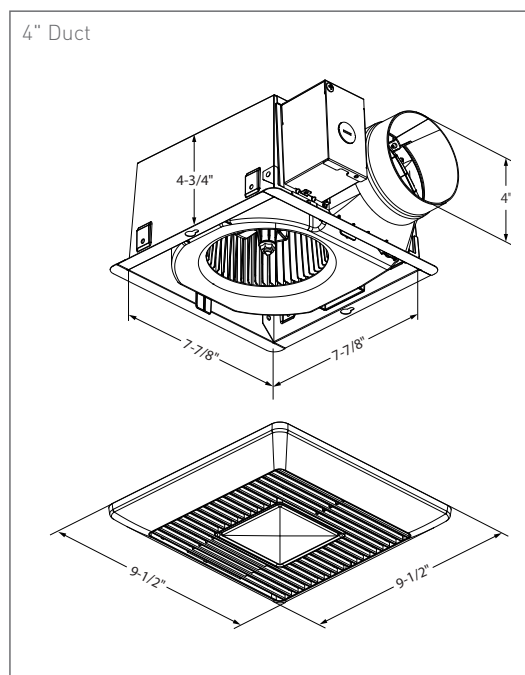

FV-15NLF51H

50-60-70-80-90-100-110-130-150 CFM 6" Duct

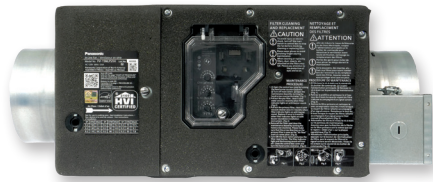

KEY FEATURES

- Upgraded junction box on hardwired models has 2 convenient knockouts for routing power
- Customizable fresh air supply fan featuring Pick-A-Flow® technology – one fan, you select from 9 CFM levels – 50, 60, 70, 80, 90, 100, 110, 130, 150
- Intelligent ECM motor with SmartFlow™ technology provides optimum CFM output for precision whole-house supply ventilation
- Operates as a stand-alone filtered supply fresh air solution to meet ASHRAE 62.2 requirements for make-up / supply air
- Capable of communicating with Panasonic's acclaimed WhisperGreen® Select to create a balanced ventilation solution
- Incorporates adjustable high humidity and low temperature dials for easy adjustments in any climate zone
- Pressure ports for airflow verification
- Built-in Plug'n Play module port with smart home capability
- HVI tested and certified with a MERV 13 filter (FV-FL1315NL1)
- Optional MERV 8 filters also available
- Complies with ASHRAE 62.2, LEED, CA Title 24 and HVI certified

Accessories (Sold Separately):



FV-FL0815NL1 MERV 8
Replacement Filter



FV-FL1315NL1 MERV 13
Replacement Filter



CFM
Select from
50/60/70/80/90/100
/110/130/150 CFM
(9 settings).



Humidity Setting
Customizable fresh
air supply based on
humidity conditions
of incoming air.



Temperature Setting
Customizable low
temperature setting will
shut fan off when incoming
supply air is too cold.



Reset Button
Resets every time
customer changes
filter.



Wi-Fi Module
(WP100PBA)

SWDGET

SUGGESTED PRODUCTS



On-Off Switch
S16001WA



Wi-Fi Control
W1000UWA

WhisperFresh® Select										
Characteristics										
Static pressure in inches w.g.	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	
Air Volume (CFM)	150	150	130	140	140	130	130	129	130	
Power Consumption (Watts)	27.3	32.0	-	24.8	29.0	-	22.6	25.0	-	
Energy Efficiency (CFMs/Watt)	5.59	4.68	-	5.97	4.82	-	6.30	5.20	-	
Speed	1314	-	-	1265	-	-	1235	-	-	
Current	0.41	0.46	-	0.26	0.42	-	0.33	0.38	-	
Power Rating (V/Hz)										





HVI tested and certified with MERV 13 filter.

- Certified for use with MERV 8 and MERV 13 filters
- MERV 13 filter included
- MERV 8 and MERV 13 replacements filters are available




6" Duct with new design changes:

- Junction Box: code compliant
- Pressure Port: air flow verification

WhisperFresh® Select Fan Dimensions

FV-15NLFS1H

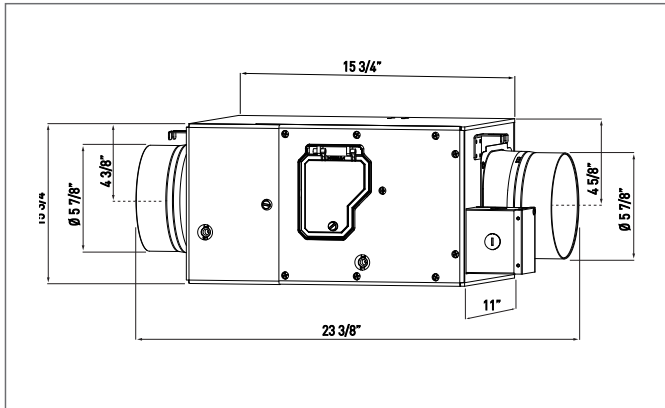

FV-15NLFS1H

	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4	0.2	0.3	0.4
	120	118	116	110	110	109	100	100	100	90	88	90	80	80	80	70	69	70	60	60	60	50	50	50
	19.4	23.0	-	16.7	20.0	-	15.3	18.0	21.0	13.5	15.0	19.0	12.4	14.0	17.0	10.0	13.0	15.0	9.3	11.0	14.0	8.2	10.0	12.0
	6.72	5.21	-	7.05	5.50	-	7.45	5.55	4.76	7.61	6.00	4.73	7.83	5.71	4.70	7.64	5.38	4.66	7.58	5.45	4.28	7.40	5.00	4.16
	1201	-	-	1152	-	-	1121	-	-	1086	-	-	1067	-	-	1033	-	-	1012	-	-	989	-	-
	0.29	0.34	-	0.25	0.31	-	0.23	0.28	0.32	0.20	0.25	0.29	0.18	0.22	0.26	0.16	0.21	0.24	0.15	0.18	0.22	0.13	0.16	0.21

120/60

WhisperFresh® Plus

FV-13NLFSC1 - 20-130 CFM - 6" Duct



WhisperFresh®

FV-13NLFSC1 - 20-130 CFM - 6" Duct



KEY FEATURES

- Built-in, customizable fresh air supply fan featuring SmartFlow™ technology and airflow from 20–130 CFM adjustable in single CFM increments on the unit
- Operates as a stand-alone filtered supply fresh air solution designed to meet ASHRAE 62.2 mechanical ventilation strategies
- Strong value option for residential new construction, multifamily, and high-volume residential projects
- Seven-segment Fault Indicator Display (FID) provides airflow and maintenance alerts
- Accepts compatible 8" x 8" x 1" filters for flexible filtration options.
- Access panel and filter door help simplify filter checks and maintenance
- Insulated housing helps reduce condensation risk and noise
- Flexible installation options for attic, ceiling, mechanical room, under-ceiling, wall-mounted, and flush-to-ceiling applications
- ENERGY STAR rated, HVI certified, CEC certified, and designed to support ASHRAE 62.2 and California Title 24 applications

FV-13NLFSC1 Only

- Additional built-in, digital, functionality for humidity/temperature level adjustment
- Humidity sensing helps support smarter fresh air supply operation in hot, humid climates
- Temperature sensing helps support operation based on incoming outdoor air conditions
- Built-in Plug'n Play® port supports optional Wi-Fi connectivity. Wi-Fi module sold separately.
- Can sync with compatible Panasonic exhaust ventilation fans when paired with the optional Wi-Fi module and proper setup.
- Step-up solution for customers who need sensing, diagnostics, and optional connected ventilation capability

WhisperFresh® and WhisperFresh® Plus												
Specifications												
Static Pressure in inches w.g.	0.2											
Air Volume (CFM)	130	120	110	100	90	80	70	60	50	40	30	20
Power Consumption (watts)	17.9	15.3	13.2	11.2	9.7	8.8	7.4	6.6	5.9	5.2	4.7	4.4
Energy Efficiency (CFM/Watt)	7.2	7.8	8.3	8.9	9.2	9.0	9.4	9.0	8.4	7.6	6.3	4.5
Current (amps)	0.29	0.26	0.22	0.19	0.17	0.15	0.13	0.12	0.11	0.10	0.09	0.08
MAX. Current(amps)	0.29											
Power Rating (V/Hz)	120/60											
ENERGY STAR® certified	Yes											





Mode options:

- **CFM:** 20-130 CFM adjustable in single increments
- **FV-NLFSC1 model, only:**
Relative Humidity - lower limit 10-30%, upper limit 40-80%;
Temperature- lower limit 14-40°F, upper limit 80-105°F.
- **FID** – Fault Indicator Display- will display code on screen



Reset Button

Indicator light resets when filter is changed




Wi-Fi Module

(WP100PBA) for FV-13NLFSC1

WhisperFresh® and WhisperFresh® Plus Dimensions

FV-13NLFSC1 / FV-13NLFSC1

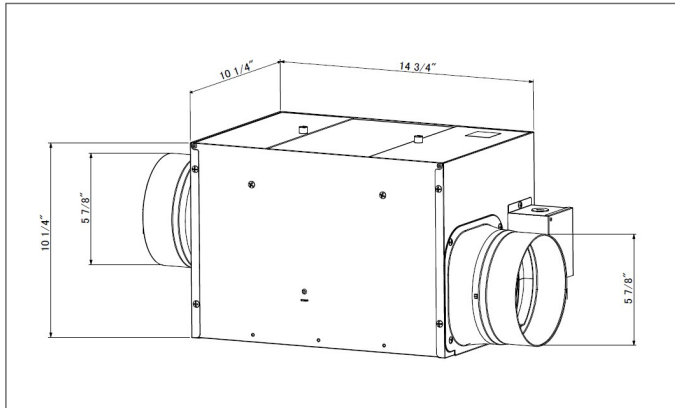


FV-13NLFSC1 / FV-13NLFSC1


HVI Certified Data

	0.3												0.4											
	130	120	110	100	90	80	70	60	50	40	30	20	107	109	110	99	90	80	70	60	50	40	30	20
	20.9	18.1	16.1	14.2	12.2	11.0	9.7	8.9	7.9	7.0	6.5	5.9	18.8	18.7	18.9	16.8	15.0	13.7	12.2	11.1	9.9	9.2	8.5	7.6
	6.2	6.6	6.8	7.0	7.3	7.2	7.2	6.7	6.3	5.7	4.6	3.3	5.6	5.8	5.8	5.8	6.0	5.8	5.7	5.4	5.0	4.3	3.5	2.6
	0.34	0.29	0.26	0.23	0.21	0.19	0.17	0.15	0.14	0.13	0.12	0.11	0.31	0.30	0.31	0.27	0.25	0.23	0.21	0.19	0.17	0.16	0.15	0.13
	0.34												0.31											
	120/60												120/60											

Box 1 – Universal Housings (4x)

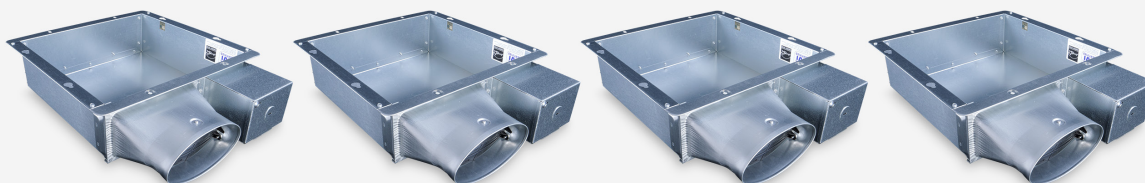

Box 2 – Motors (4x), Grilles (4x)

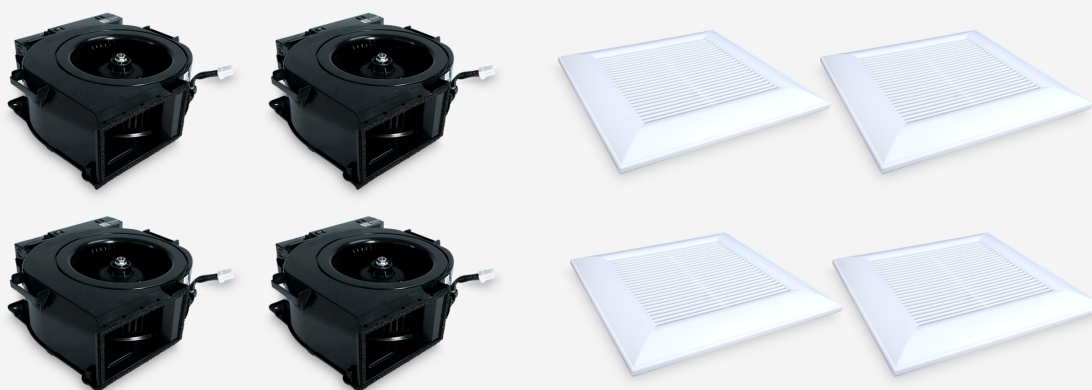


WhisperValue[®] DC Contractor Pack*

The Contractor Pack includes four complete fans. The housing and motor/grille are packaged separately for flexibility during installation.

WhisperValue [®] DC Universal Housing Contractor Packs			
Model #	Description	Contents	Master Pack*
FV-0510VSA1	Universal Housing	Housing, Duct Adapter and Junction Box	4
FV-0510VSB1	Fan Motor and Grille Assembly	Motor and Grille	4
FV-0510VSCB1	Fan Motor and Grille Assembly with Condensation Sensor	Motor, Grille and Condensation Sensor	4
FV-0810VSSB1	Fan Motor and Grille Assembly with Multi-Speed Sensor	Motor, Grille and Multi-Speed Sensor	4

*Must order in quantities of 4, shipment will contain 1 box with 4 units.

Box 1 – Universal Housings (4x)

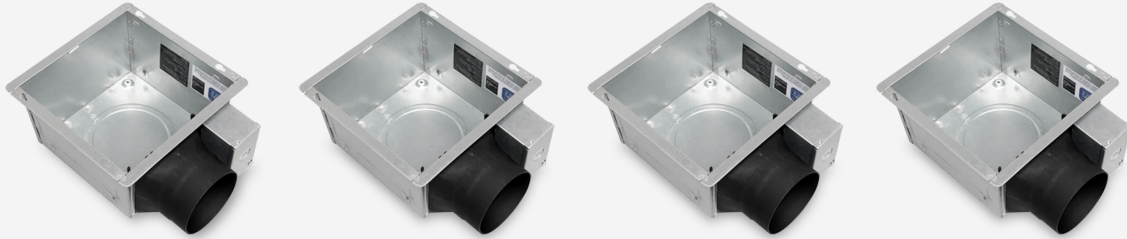

Box 2 – Motors (4x), Grilles (4x)



EcoVent® Contractor Pack*

Model #	Description	Contents	Master Pack*
FV-07VBA1A	Universal Housing	Housing, Duct Adapter & Junction Box	4
FV-07VBB1	Motor/Grille Assembly	Motor & Grille	4

*Must order in quantities of 4, shipment will contain 1 box with 4 pieces of each item.

*Multi-packs are only available with the Fan only model.

Energy Recovery Ventilators (ERVs)



Balanced ventilation for any project that you desire



BalancedHome®



Intelli-Balance®



WhisperComfort®
60

BalancedHome® Elite Plus+ Models

FV-21VEC1T - Top Port (40- 210 CFM)
 FV-21VEC1S - Side Port (40- 210 CFM)
 FV-16VEC1T - Top Port (30-160 CFM)
 FV-16VEC1S - Side Port (30-160 CFM)
 FV-13VEC1T - Top Port (30-130 CFM)
 FV-13VEC1S - Side Port (30-130 CFM)



*BalancedHome® Elite Plus+
 FV-21VE1T / FV-21VE1S – Top and Side Ports*



*BalancedHome® Elite Plus+
 FV-16VE1T / FV-16VE1S – Top and Side Ports*

BalancedHome® Elite Models

FV-15VE1T - Top Port (30-150 CFM)
 FV-15VE1S - Side Port (30-150 CFM)
 FV-12VE1T - Top Port (30-120 CFM)
 FV-12VE1S - Side Port (30-120 CFM)



*BalancedHome® Elite
 FV-15VE1T / FV-15VE1S – Top and Side Ports*


KEY FEATURES

Elite Plus+:

- Top-rated sensible recovery efficiency of 84% complies with IECC code requirements.
- Automatic frost prevention mode to stop core from freezing in extreme temperatures
- Compatible for all climate zones

Elite Plus+ and Elite:

- Designed for single family and new construction built to meet new energy efficiency standards
- Equipped with state-of-the-art Smartflow™ technology to provide balanced ventilation
- Vertical and horizontal port configuration options to fit your installation need
- Feature rich controls enable the HVAC professional to customize to the homeowner's specification.
- Advanced MERV 13 filter included; Optional MERV 8 and washable MERV 6 filters are also available¹
- Optional touch screen LED wall control allows for CFM selection, occupant controllable boost function, and status / error updates (Fault Indicator Display (FID))
- Optional Low Voltage Timer to boost ventilation air and maintain at the maximum CRM
- All models are equipped with a standard power cord and include an optional hardwire adaptor in the box
- Active fault indicator alerts to notify user when maintenance is required
- Complies with ENERGY STAR®², ASHRAE 62.2, Indoor airPlus, CALGreen (Title 24), and Washington State Residential Energy Code



**Optional Touch Screen³
 LED Wall Control (FV-SCVE2)**

The all new touchscreen LED wall control (sold separately) allows for total control of the unit. The wall control provides the user access to multiple ventilation control settings along with updates for real-time air flow, fault indicator display and temperature monitoring.



1 BalancedHome® Elite Plus+ 210 MERV 8 not available.

2 This product meets strict energy efficiency guidelines set by Natural Resources Canada and is ENERGY STAR® certified for the Canadian market only. There are no current ENERGY STAR® ratings for Energy Recovery Ventilators in the US market.

3 Satisfies California requirement for Fault Indicator Display (FID).



Low Voltage Timer (FV-SWL1060)

The optional Low Voltage Timer provides easy, push-button operation so the homeowner can boost the ventilation of the BalancedHome® Elite and Elite Plus+ ERVs. Boost supply and exhaust air and maintain at the maximum CFM for high-performance air exchange.




Wi-Fi Module (WP100PBA)


Responds automatically to poor air conditions. Communicates with other ventilation devices, including supply fans and energy recovery ventilators, to manage indoor air quality more efficiently.

BalancedHome® ERV Dimensions


FV-21VEC1T

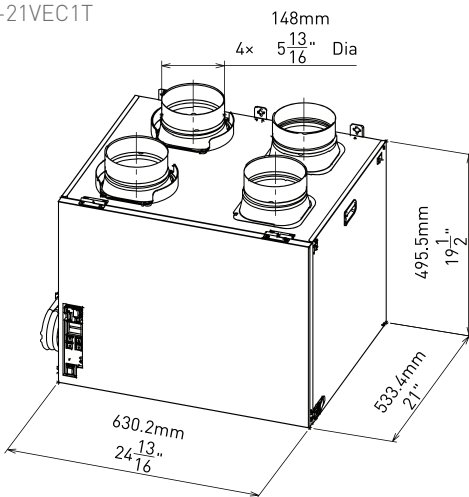


FV-21VEC1S

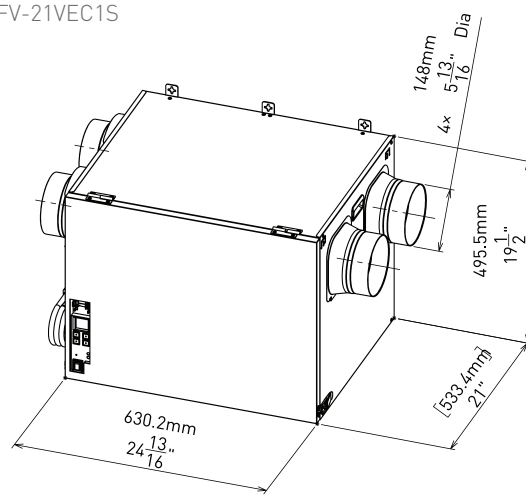

FV-16VEC1T / FV-15VE1T /
FV-13VEC1T / FV-12VE1T

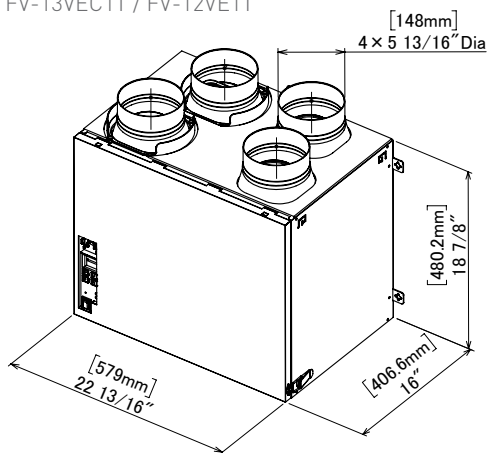

FV-16VEC1S / FV-15VE1S /
FV-13VEC1S / FV-12VE1S

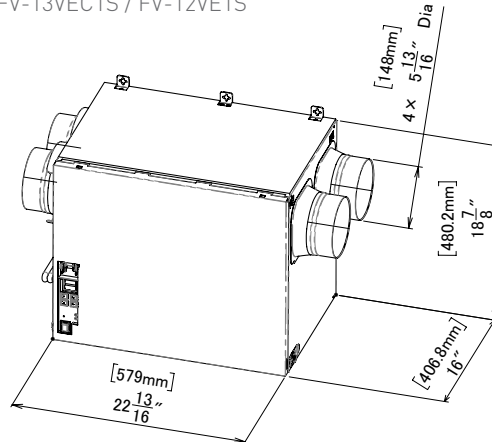

See page 72 for compatible accessory kits.

FV-21VEC1T / FV-21VEC1S												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed [Watt]	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness*	CFM/W
	°C	°F	L/S	CFM								
Heating	0	32	20	42	21	83	86	-	-	0.79	91	2.0
	0	31	31	66	28	81	84	-	-	0.70	88	2.3
	0	32	38	81	35	80	83	-	-	0.68	86	2.3
	0	32	77	163	115	74	78	-	-	0.59	80	1.4
-25°C	-25	-13	33	70	76	58	60	-	-	0.52	79	0.9
	-25	-13	29	61	58	67	69	-	-	0.62	87	1.0
Cooling	35	95	32	68	30	-	-	74	76	0.75	83	2.2
	35	95	39	83	37	-	-	72	74	0.73	82	2.2
	35	95	76	161	124	-	-	61	64	0.61	74	1.2

FV-16VEC1T / FV-16VEC1S												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed [Watt]	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness*	CFM/W
	°C	°F	L/S	CFM								
Heating	0	32	17	36	21	84	89	-	-	0.75	90	1.7
	0	32	31	66	34	79	83	-	-	0.67	85	1.9
	0	32	62	131	92	71	76	-	-	0.58	79	1.4
-25°C	-25	-13	31	66	94	62	66	-	-	0.54	83	0.7
Cooling	35	95	17	36	23	-	-	75	78	0.79	83	1.5
	35	95	31	66	36	-	-	70	73	0.72	78	1.8
	35	95	57	121	88	-	-	61	64	0.63	71	1.3

FV-13VEC1T / FV-13VEC1S												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed [Watt]	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness*	CFM/W
	°C	°F	L/S	CFM								
Heating	0	32	17	36	21	83	88	-	-	0.74	88	1.7
	0	32	31	66	34	78	82	-	-	0.66	83	1.9
	0	32	61	129	94	70	75	-	-	0.57	77	1.3
-25°C	-25	-13	31	66	98	61	65	-	-	0.53	83	0.6
Cooling	35	95	17	36	24	-	-	73	76	0.78	81	1.5
	35	95	31	66	37	-	-	68	71	0.71	76	1.7
	35	95	57	121	94	-	-	59	62	0.62	69	1.2

*Apparent Sensible Effectiveness not certified by HVI




FV-15VE1T / FV-15VE1S												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness*	CFM/W
	°C	°F	L/S	CFM	(Watt)							
Heating	0	32	17	36	20	77	79	–	–	0.67	86	1.8
	0	32	31	66	33	73	75	–	–	0.58	79	2.0
	0	32	71	150	98	64	66	–	–	0.50	69	1.5
Cooling	35	95	17	36	23	–	–	70	72	0.78	77	1.5
	35	95	31	66	37	–	–	64	66	0.66	70	1.7
	35	95	57	121	102	–	–	53	55	0.56	58	1.1

FV-12VE1T / FV-12VE1S												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness*	CFM/W
	°C	°F	L/S	CFM	(Watt)							
Heating	0	32	17	36	22	76	78	–	–	0.66	85	1.6
	0	32	31	66	35	72	74	–	–	0.57	78	1.8
	0	32	57	121	73	65	67	–	–	0.49	70	1.6
Cooling	35	95	17	36	24	–	–	68	70	0.77	76	1.5
	35	95	31	66	39	–	–	61	63	0.65	69	1.6
	35	95	52	110	77	–	–	53	55	0.56	59	1.4


*Apparent Sensible Effectiveness not certified by HVI

Elite Plus+ – Plug-in/Hardwired/Mirror
FV-15ESC1 (Any Climate)
FV-12ESC1 (Any Climate)

Elite – Plug-in/Hardwired/Mirror
FV-14ES1 (Temperate Climate)
FV-11ES1 (Temperate Climate)

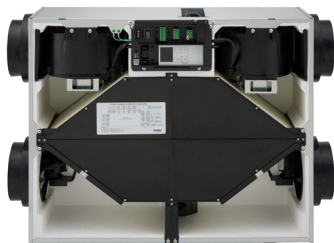

Elite Plus+ Cover Off

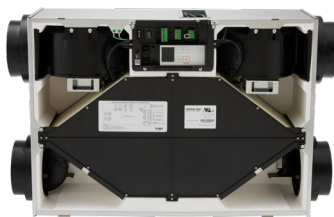

Elite Cover Off

Intelli-Balance® Elite Plus+ and Elite ERVs benefit distributors by reducing their SKU inventory as each model can be used with the attached cord or converted to a hardwired application. Standard or mirrored (reverse) configuration for installation.

KEY FEATURES

- Designed for multifamily and new construction built to meet new energy efficiency standards
- Intelli-Balance® Elite and Elite Plus+ ERVs can be used with the attached cord or converted to a hardwired application. Standard or mirrored (reverse) configuration for installation
- For mirror installation, dampers are switched from one side to the other (left-to-right or right-to-left)
- Multi-speed selector provides customizable airflow to create balanced, positive or negative pressure within the residential spaces
- High energy recovery performance achieves 90% SRE
- Two (2) powerful ECM motors with Smart Flow™ technology ensure optimum airflow by overcoming static pressure
- Built-in ASHRAE 62.2 timing function and Fault Indicator Display (FID) helps ensure code compliance and simplifies the installation process
- Two (2) MERV 13 filters included – return and supply; optional MERV 6 (washable) filter available separately
- Can be used to meet Green Building Code standards and contribute to better HERS/ERI scores

ADDITIONAL BENEFITS

- High efficiency exchange core balances heat and moisture, inside to outside
- Three mounting options – wall, ceiling or floor
- Separate control of supply and exhaust airflow. Four integrated 6" duct adapters (2 exhaust, 2 supply)
- Models comply with ASHRAE 62.2, LEED, Indoor airPLUS, CALGreen (Title 24), and 2021 Washington State Residential Energy Code
- Elite Plus+ FV-15ESC1 and FV-12ESC1 also comply with Ontario Building Code, ENERGY STAR®¹ and Novoclimat requirements



Control Terminals



Built-In Controls



¹ Meets strict energy efficiency guidelines set by Natural Resources Canada and is ENERGY STAR® certified for the Canadian market only.* There are no ENERGY STAR® ratings for ERVs in the US market.

Accessories (Sold Separately)




FV-FL1315ES1 MERV 13
Replacement Filter (2x Included)

FV-FL0615ES1 MERV 6
Replacement Filter



Hygroscopic Transfer Core



Optional Touch Screen* LED Wall Control (FV-SCVE2)

The all new touchscreen LED wall control (sold separately) allows for total control of the unit. The wall control provides the user access to multiple ventilation control settings along with updates for real-time air flow, fault indicator display and temperature monitoring.



Optional Wi-Fi Module (WP100PBA)

Responds automatically to poor air conditions. Communicates with other ventilation devices, including supply fans and energy recovery ventilators, to manage indoor air quality more efficiently.



Optional Low Voltage Timer (FV-SWL1060)

The optional Low Voltage Timer provides easy, push-button operation so the homeowner can boost the ventilation of the Intell-Balance® Elite and Elite Plus+ ERVs. Boost supply and exhaust air and maintain at the maximum CFM for high-performance air exchange.

See page 72 for compatible accessory kits.

*Satisfies California requirement for Fault Indicator Display (FID)

FV-11ES1												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness (NOT HVI Certified)	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	CFM/W
	°C	°F	L/S	CFM	(Watt)							
Heating	0	32	17	36	21	88	92	0.87	94	---	---	1.7
	0	32	30	64	33	83	86	0.78	86	---	---	1.9
	0	32	52	110	62	75	79	0.71	79	---	---	1.7
Cooling	35	95	17	36	22	---	---	0.88	88	82	84	1.6
	35	95	30	64	34	---	---	0.79	81	76	79	1.8
	35	95	52	110	64	---	---	0.69	73	64	67	1.7


FV-12ESC1												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness (NOT HVI Certified)	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	CFM/W
	°C	°F	L/S	CFM	(Watt)							
Heating	0	32	17	36	21	89	93	0.92	95	---	---	1.7
	0	32	31	66	33	83	86	0.83	87	---	---	2.0
	0	32	52	110	62	75	79	0.75	80	---	---	1.7
-25°C	-25	-13	31	66	83	67	70	0.73	84	---	---	0.7
Cooling	35	95	17	36	22	---	---	0.89	89	83	85	1.6
	35	95	31	66	34	---	---	0.80	82	76	79	1.9
	35	95	52	110	64	---	---	0.70	74	64	67	1.7

FV-14ES1												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness (NOT HVI Certified)	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	CFM/W
	°C	°F	L/S	CFM	(Watt)							
Heating	0	32	17	36	21	89	93	0.89	96	---	---	1.7
	0	32	30	64	32	84	87	0.80	88	---	---	2.0
	0	32	52	110	61	76	80	0.73	81	---	---	1.8
Cooling	35	95	17	36	21	---	---	0.90	90	83	85	1.7
	35	95	30	64	33	---	---	0.81	83	77	80	1.9
	35	95	52	110	64	---	---	0.71	75	65	68	1.7


FV-15ESC1												
Energy Performance												
Mode	Outdoor Temperature		Net Air Flow		Power consumed	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Latent Recovery / Moisture Transfer	Apparent Sensible Effectiveness (NOT HVI Certified)	Total Recovery Efficiency	Adjusted Total Recovery Efficiency	CFM/W
	°C	°F	L/S	CFM	(Watt)							
Heating	0	32	17	36	21	90	94	0.94	97	---	---	1.7
	0	32	31	66	32	84	87	0.85	89	---	---	2.0
	0	32	52	110	61	77	81	0.77	82	---	---	1.8
	0	32	71	150	107	72	77	0.72	78	---	---	1.4
-25°C	-25	-13	31	66	80	68	71	0.74	85	---	---	0.8
Cooling	35	95	17	36	21	---	---	0.91	91	84	86	1.7
	35	95	31	66	33	---	---	0.82	84	77	80	2.0
	35	95	52	110	64	---	---	0.72	76	66	69	1.7
	35	95	71	150	115	---	---	0.66	72	60	63	1.3

Intelli-Balance® ERV Dimensions

FV-15ESC1 / FV-12ESC1

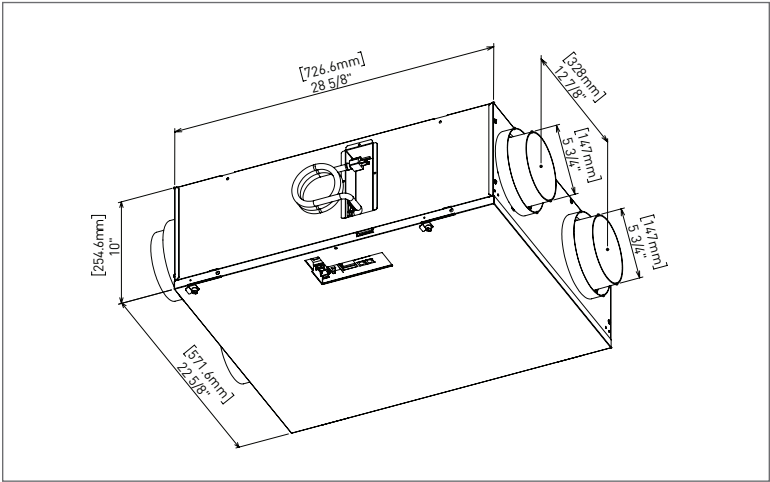

FV-14ES1 / FV-11ES1

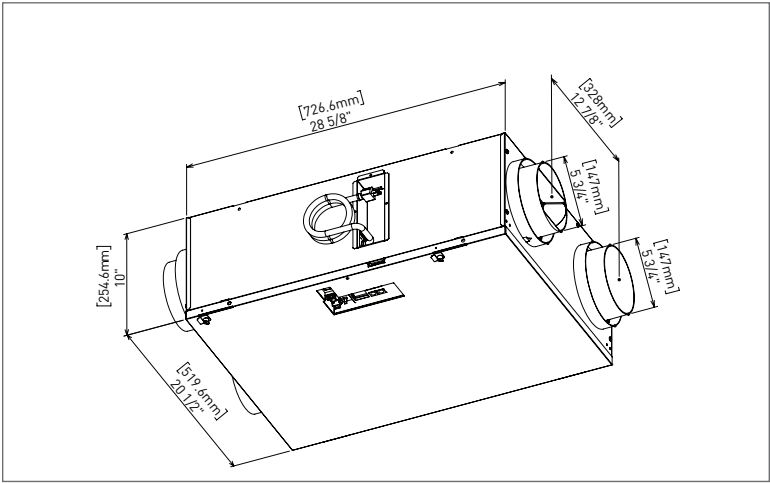



FV-06VE1
20-60 CFM



KEY FEATURES

- Sensible recovery efficiency of 70% at 32°F
- Total recovery efficiency of 60% at 95°F
- Multi-speed selector (20 to 50 CFM) provides customizable airflow
- Occupant-controllable boost function moves fan speed to 60 CFM when activated
- Engineered for use in virtually any North America climate zone
- High efficiency capillary core recovers heat and helps maintain desired moisture levels inside
- Two (2) powerful DC Panasonic ECM motors provide quiet and efficient airflow
- MERV 13 replaceable filters for superior air filtration
- Core material permeated with anti-mold treatment to help prevent mold
- Separate control of supply and exhaust airflow
- (Optional) WhisperVent® wall cap allows for supply and exhaust air through one building penetration - up to 100 CFM each side

Supply and exhaust air flows through a single exterior opening

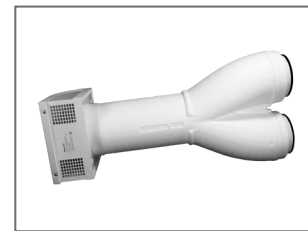


FV-WC10VE1
WhisperVent® Wall Cap

Performance Specifications: WhisperComfort® 60 FV-06VE1								
Mode	Supply Temperature		Net Air Flow		Power Consumption (w)	Sensible Recovery Efficiency	Apparent Sensible Recovery Efficiency	Net Moisture Transfer
	°F	°C	L/s	CFM				
Heating	32	0	9	20	9	70%	73%	0.7
	32	0	28	60	39	60%	63%	0.5
Cooling	95	35	13	27	12	Total Recovery Efficiency		
						60%		

Sound Specifications: WhisperComfort® 60 FV-06VE1							
	SP	CFM	Sones	CFM	Sones	CFM	Sones
4" Duct	0.1"	60	2.5	50	1.5	40	0.9
	0.25"	54	2.5	43	2.0	30	1.2

WhisperComfort® 60 ERV Dimensions

FV-06VE1

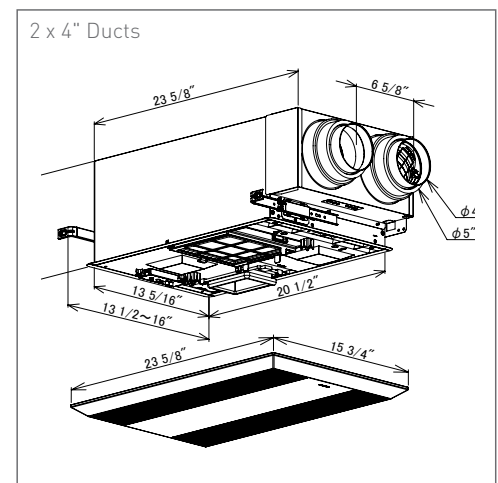

Controller, Supply Damper & FanConnect™ Wall Switch Kit SACG2K-04/06/08/10

4", 6", 8" or 10" Duct Options




KEY FEATURES


- Ideal for single and multifamily construction
- Provides whole house ventilation control that's integrated into the home's central HVAC system
- Durable, powered open/close damper alleviates damper chatter
- Controls WhisperGreen® Select and other ventilation fans to provide supplemental ventilation as needed to meet ASHRAE 62.2
- Two operational modes help a home achieve the lowest cost per HERS point for either supply or balanced ventilation strategies
- Works in tandem with spot exhaust fan to achieve hybrid supply or balanced ventilation
- Features a patented setup process, including two simple options: Flow vs Time
- Digital display panel shows system status and aids in troubleshooting
- Fan/light wall switch can be programmed from the controller to provide a delay timer function

SelectCycler® offers the **most cost effective** solution for meeting ventilation code and minimizing the impact to your HERS Index.

HERS Index Per Ventilation Design Strategy*

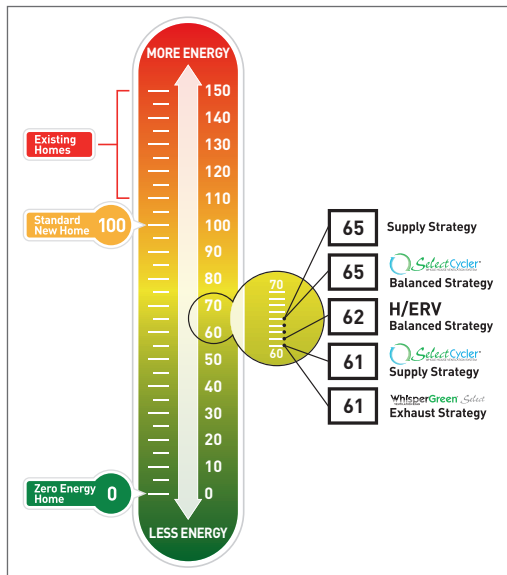

Ventilation Cost Per HERS Point Index*

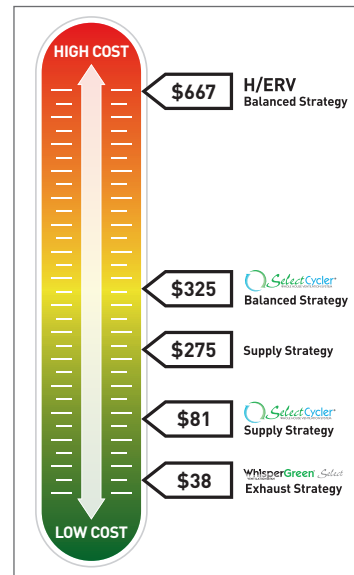

WhisperGreen Select
ECM Motor and low watt consumption contribute to a low HERS Index Score and Cost Per HERS Point Index

SelectCycler System **Balanced Mode** Lowest cost per HERS point for **Balanced Ventilation**

SelectCycler System **Hybrid Mode** Lowest cost per HERS point for **Supply Ventilation**

WhisperGreen® Select Lowest cost per HERS point for **Exhaust Ventilation**

*Modeling conducted by third-party
RESNET Provider EPX/NRGLogic

SelectCycler Kit (SAC02K)



Programmable Wall Mounted Controller

- Ideal for single-family and multifamily construction
- Calculates supply duct and exhaust fan run cycles to meet ASHRAE 62.2
- Patented algorithm calculates operation time to meet ASHRAE 62.2 ventilation requirements
- Allows for programmable hours of operation



Motorized Supply Damper

- Stainless steel, power open/close damper
- Available in 4", 6", 8" or 10" duct size
- Operating voltage: 24VAC (up to 30VAC max)
- Current draw: 0.07 A idle; 0.125 A for 15 second damper transit time
- Damper can be installed in any position



FanConnect™ Bathroom Fan/Light Wall Switch

- Compatible with single, or multi-speed fans, set to a single speed setting
- Light: 450 Watts @ 120VAC (blue wire)
- Fan: 150 Watts @ 120VAC (red wire)
- Operation: 120VAC +/- 10%

Optional Accessories

Hot and cold temperature sensors disable the fresh air damper in extreme temperatures



Hot Temperature Sensor (SACTG-H01)

- System control in extreme hot climates
- OFF temperature: 95°F +/- 5°
- ON temperature: 4°F lower
- Operation: 2A @ 24VAC



Cold Temperature Sensor (SACTG-C02)

- System control in extreme cold climates
- OFF temperature: 35°F +/- 5°
- ON temperature: 4°F higher
- Operation: 2A @ 24VAC

Atmosphere Dryer Exhaust Duct Power Ventilators





DBF-DEDPV



VTX-DEDPV



Atmosphere - distributed in the U.S. by Panasonic - is the only brand of power ventilators that includes an all-in-one power ventilator and that provides solutions to facilitate proper clothes drying in multifamily and single-family applications with long duct runs and frequent bends to meet building codes.

We offer two dryer duct exhaust power ventilators to solve common issue of clothes not drying quickly and efficiently and to meet local building codes. Solution for residential or commercial clothes dryer system to:

- Operate efficiently – with lower energy costs and reduced cycle times.
- Dry clothing appropriately with limited wear – whether by time, specialized setting or sensor.
- Last longer with few repairs or replacements.
- Reduce the risk of fire in their homes.

Typically required when a clothes dryer's vent run is over 25 equivalent feet or the dryer is experiencing long drying time. When using equivalent feet, a 90° elbow equals 5 feet and a 45° elbow equals 2.5 feet.

DBF-DEDPV



VORTEX 



Hard-wired, all-in-one product featuring an integrated lint trap and a pressure sensor to automatically sense when the dryer is on.

KEY FEATURES

- Monitors internal pressure and notifies homeowner in case of a blockage
- Quick and easy maintenance cleaning
- Fast and easy wall mounted installation
- Galvanized steel housing ensuring long lasting rust protection
- Assembly not required
- Installs in half the time versus traditional-style dryer exhaust duct power ventilators—saving labor and money.
- Supports duct length up to 130'
- Thermal fuse will shut down the fan in case of excessive dryer heat
- Roof or wall exhaust
- Integrated lint trap with low pressure drop
- Reduces drying time and energy consumption
- Certified as a DEDPV UL705 for gas and electric dryers
- 10-year warranty

LT4 / LT4S



VORTEX 

Secondary Lint Trap that is installed between the dryer and dryer exhaust duct power ventilator

KEY FEATURES

- Powder coated 24Ga galvanized steel box with 4" adapters
- Fast and easy installation with finishing frame
- 4" window to monitor lint accumulation
- LT4 is equipped with a screen that filters the air that feeds into dryer exhaust fan
- LT4S is suitable in a 2" x 4" wall
- Provides protection from a hazardous build-up of lint in the exhaust duct that could lead to a serious fire

VTX-DEDPV



VORTEX 





Traditional-style, dryer exhaust duct power ventilator that includes an integrated pressure sensor, and a wall-mounted indicator panel with 50ft of cable.

KEY FEATURES

- Certified UL 705 dryer exhaust duct power ventilator suitable for gas & electric dryers
- Maintains minimum of 1,200 FPM air velocity
- LED indicator panel for operation status
- Reduce drying times and energy consumption
- Integrated high temperature thermal fuse for safety
- Roof or wall exhaust
- Complies with IRC Code
- Requires a lint trap
- Pre-wired with 120V power cord

SLT

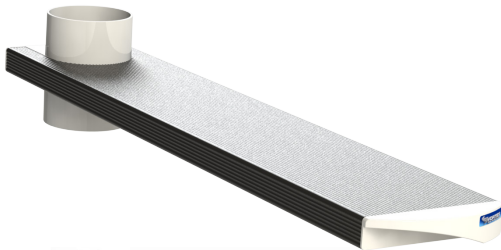

Slim Lint Trap For Stackable Dryer Installation

KEY FEATURES

- 41 sq. inch filtering area increases dryer efficiency
- Washable nylon filter screen
- 4" duct adapter
- Aluminum extrusion body and slider
- Simple and quick installation
- Protection from a clogged exhaust duct that could be a fire hazard

Atmosphere Inline Fans





Atmosphere - distributed in the U.S. by Panasonic - offers a suite of inline fans and dryer exhaust duct power ventilators with a best-in-class, 10-year warranty for residential and light commercial applications.

Inline Fans

Choose from two styles of inline fans, depending upon the application. VTX Series centrifugal, inline fans and S-Line Series mixed-flow inline fans are designed to overcome high static pressure in long duct runs and are designed for residential and light commercial ventilation applications (supply or exhaust).

Install in ceilings, floors or walls. Available in various duct sizes (4"-12") with CFM flow rate performance from 198 to 1124 CFM. (VTX). These fans deliver comfort and ensure healthy ventilation inside the home.



VTX Series

What are Inline fans?

- Inline fans are typically integrated with the ducting and mounted in remote locations such as an attic or crawlspace.
- To ventilate an area that does not have clearance or space for a ceiling-mounted fan, an inline fan would be an appropriate alternative.
- The inline fan would be connected to a dedicated duct system that would pull or push stale air from the space.
- Since inline fans are not mounted directly to the ceiling, any sound created from the fan's operation is minimized within the living space.
- Can accommodate single-port (exhausting from a single area) or multi-port (Exhausting from multiple areas) ducts.
- Very long or complicated duct runs can benefit from the use of inline fans.



S-Line Series

VORTEX 

Destratification Fans

Powerful, energy-saving, cost-saving fan for large spaces with ceiling heights from 15' to 75'. These powerful 1082 CFM fans unobtrusively hang independently in spaces with no need to connect to duct work.

They can be angled to provide an easy-to-direct column of air from ceiling heights from 15' to 75'.

Used in commercial, industrial, and warehouse facilities to create uniform air temperatures when there are high ceilings, delivering energy savings up to 35% in heating season and up to 25% in cooling season.



D-65Black, D-65White

VORTEX 

Atmosphere VTX Series high-performance Inline duct blowers

KEY FEATURES

- Suggested replacement for WhisperLine
- Aerodynamic design allowing more air flow
- Pre-wired with 120V power cord
- ETL and AMCA Air Listed
- 10-Year Warranty
- Install in ceilings, floors or walls.
- Available in various duct sizes 4" to 12"
- Designed to overcome high static pressure in long duct runs
- Light commercial and residential applications (supply or exhaust)
- CFM flow rate performance from 198 to 1124 CFM

Style	Model Number	Features
	VTX400	Atmosphere Corded Inline Fan, 175 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 4" duct, backdraft damper not included; speed controller available separately
	VTX400C	Atmosphere Corded Inline Fan with Integrated Current Sensor, 175 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 4" duct, backdraft damper not included, speed controller available separately
	VTX400P	Atmosphere Corded Centrifugal Inline Fan with Integrated Pressure Switch, 175 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 4" duct, backdraft damper not included, speed controller available separately
	VTX600L	Atmosphere Corded Centrifugal Inline Fan, 244 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 6" duct, backdraft damper not included, speed controller available separately
	VTX600	Atmosphere Corded Centrifugal Inline Fan, 465 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 6" duct, backdraft damper not included, speed controller available separately
	VTX800L	Atmosphere Corded Centrifugal Inline Fan, 602 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 8" duct, backdraft damper not included, speed controller available separately

Style	Model Number	Features
	VTX800	Atmosphere Corded Centrifugal Inline Fan, 681 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 8" duct, backdraft damper not included, speed controller available separately
	VTX1000	Atmosphere Corded Centrifugal Inline Fan, 723 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 10" duct, backdraft damper not included, speed controller available separately
	VTX1200L	Atmosphere Corded centrifugal Inline Fan, 846 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 12" duct, backdraft damper not included, speed controller available separately
	VTX1200	Atmosphere Corded Centrifugal Inline Fan, 1067 CFM at 0.2 s.p., for high static pressure applications and long duct runs, 12" duct, backdraft damper not included, speed controller available separately


VTX Series

All dimensions in inches

Model	Weight (lbs)*	A**	B	C
VTX400 (P, C)	7.4	4.0	8.5	9.5
VTX600L	6.8	6.0	8.5	9.5
VTX600	10.8	6.0	10.5	13.0
VTX800L	12.0	8.0	10.5	13.0
VTX800	12.2	8.0	10.5	13.0
VTX1000	12.4	10.0	10.5	13.0
VTX1200L	14.4	12.0	12.3	16.0
VTX1200	14.6	12.0	12.3	16.0

* Mounting brackets included

** Represents duct dimensions

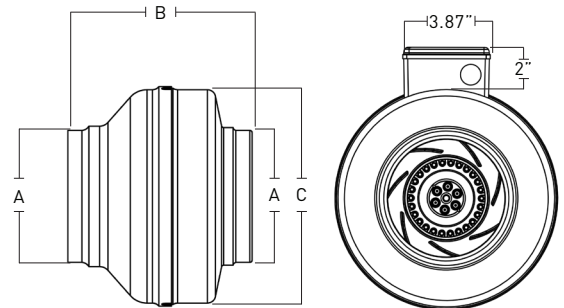

VORTEX 

Atmosphere S-line Mixed Flow Inline Fans designed for residential and light commercial ventilation applications

KEY FEATURES

- Powerful, compact mixed flow fan where high static pressure conditions are not present, and there are space constraints
- Easy to install - mounting brackets included
- 100% speed controllable
- Pre-wired with 120V power cord
- ETL & AMCA air listed
- 10-year warranty



Style	Model Number	Features
	S-600	Atmosphere Corded Mixed-Flow Inline Fan, 312 CFM at 0.2 s.p., 6" duct, sealed casing, compact design, backdraft damper included, speed controller available separately
	S-800	Atmosphere Corded Mixed-flow Inline Fan, 688 CFM at 0.2 s.p., 8" duct, sealed casing, compact design, backdraft damper included, speed controller available separately
	S-1000	Atmosphere Corded Mixed-Flow Inline Fan, 1032 CFM at 0.2 s.p., 10" duct, sealed casing, compact design, backdraft damper included, speed controller available separately

Destratification Fans

D-65Black
D-65White



3D shaped fans powered by a mixed flow impeller

KEY FEATURES

- Energy-efficient fans, delivering a focused, easy-to-direct column of air
- Creates uniform air temperature from floor to ceilings with heights from 15' to 75' high
- Run independently of existing HVAC system
- Speed controllable, allowing fine-tuning for individual comfort
- 10-year limited warranty
- Destratification fans have a maximum 1082 CFM
- Includes 3 types of UL approved fast-mounting hardware
- Available in white or black
- Applications: warehouses, manufacturing facilities, gyms, theaters, hospitals, airports/hangars, arenas, grocery stores

Accessories



Atmosphere Dial-A-Temp

ADAT-2.5

KEY FEATURES

- Plug-in design - no tools required
- UL Listed
- Fire retardant thermoplastic enclosure
- On-Off switch, high to low variable
- Helps reduce fan or blower noise
- 1-year warranty



Atmosphere Solid State Variable Speed AC Motor Control

AVR-5

KEY FEATURES

- Designed for mounting in a 2" X 4" electrical wall box
- UL Listed
- Fully variable
- Rotary-style fan control
- Tough impact-resistant thermoplastic housing
- 1-year warranty



Atmosphere Spring Loaded Backdraft Dampers

4", BDD-4; 6", BDD-6; 8", BDD-8; 10", BDD-10; 12", BDD-12

KEY FEATURES

- All sizes include a metal sleeve
- Requires from 0.04" to 0.08" wg pressure to open
- Exterior foam gasket ensures a tight seal against duct
- Gasket designed to withstand temperatures from -22° F to 180° F



Model: PC-NLF06D

Atmosphere Inline Fan Accessory Kits*

KEY FEATURES

- Durable, ABS grille, 9 1/2" x 9 1/2" with white gloss finish
- Galvanized Y-adaptor and inlet mounts
- Sealed backdraft dampers

Model	Duct Size	ABS inlet grille	Metal plate	Backdraft Damper	Clamps	Y-Adaptor
FV-NLF04G	4"	1	1	–	–	–
FV-NLF06G	6"	1	1	–	–	–
PC-NLF04S	4"	1	–	1	6	–
PC-NLF06S	6"	1	–	1	6	–
PC-NLF04D	4"	2	–	2	12	1
PC-NLF06D	6"	2	–	2	12	1
PC-NLF64D	6"	1	–	2	12	1

*Can also be used with BalancedHome® and Intelli-Balance® ERVs.



Adjustable Duct Clamps

KEY FEATURES

- The adjustable clamps are intended to simplify fan installation and isolate fan vibration from rigid metal duct
- Convenient in installations where regular removal of the fan is necessary for inspection and cleaning
- Available in sizes 4" through 12" to fit corresponding duct sizes
- The clamps are equipped with integral hanging tabs

Model	Duct Size
ADC4	4"
ADC6	6"
ADC8	8"
ADC10	10"
ADC12	12"

Smart Controls





Empower your clients with Smart, Comfortable Homes for good indoor air quality

Panasonic has created a simple yet robust ventilation strategy to help builders deliver Comfortable homes. Swidget® smart controls and mobile app pair with Panasonic ventilation products to monitor, detect and auto-activate the proper fan when stale air and moisture are detected. Removing harmful contaminants ensures homeowners breathe the highest quality air around the clock. Monitor. Detect. Auto-activate. It's that simple and that effective.

Choose a Swidget sensor to monitor



Motion




Temperature



Humidity



Air Quality

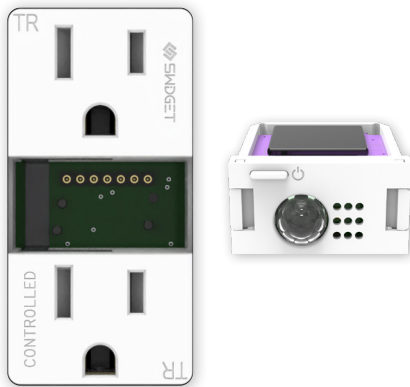

KEY FEATURES

- Breathe confidently with air that is always fresh.
- Smart Controls detect stale air and automatically control Panasonic's ventilation products to remove stale or contaminated air
- Pairing Swidget® smart controls with Panasonic ventilation fans helps reduce harmful VOCs and allergens
- Variety of sensors that monitor motion, temperature, humidity and air quality

Empower your home to ensure you are breathing clean, fresh air



Intelli-Balance® Energy Recovery Ventilator



20/40/60 Timer Control Switch



Air Quality Sensor



Swidget® can monitor your indoor air quality and turn on your ERV when you need it most to keep your air clean and fresh.

Empower your home to protect you from mold and mildew



WhisperGreen® Select Fan



20/40/60 Timer Control Switch




Temp/Humi/Motion Sensor




Set your fan to turn on automatically when Swidget® detects the humidity levels are too high in your bathroom.

Also works with Wi-Fi Module WP100PBA

WIRING DEVICES



15A Outlet
(R1015SWA)



20A Outlet
(R1020SWA)



On - Off Switch
(S16001WA)



Dimmer
(SD3001WA)



20/40/60 Timer
Control Switch
(S16008WA)



Auxiliary
Control Switch
(S16009WA)

INSERTS




Air Quality Sensor
(WI008UWA)



Temp/Humi/Motion Sensor
(WI006UWA)



Temp/Humi/Sensor
(WI005UWA)



Motion Sensor
(WI004UWA)



Power Out Light
(WI003UWA)



Guide Light
(WI002UWA)



USB Charger
(WI001UWA)



Power Control
(WI000UWA)



Wi-Fi + Camera
(WI007UWA)

On/Off—

FV-WCCS1-W (White)

On/Off/Light—

FV-WCCS2-W (White)



FV-WCCS1-W




FV-WCCS2-W

KEY FEATURES

- Intelligent and advanced sensor technology monitors humidity and temperature to anticipate dew point, automatically operating the fan to control moisture
- Automatic seasonal adaptability with optional Moisture Sensitivity Selector allows fine tuning for dry or moist environments
- Adjustable Minutes Per Hour (MPH) Fan Timer ensures consistent and controlled ventilation throughout the day for compliance with ASHRAE 62.2
- Automatic Fan Control – 30 minute countdown timer initiates after moisture returns to normal levels
- Manual Fan Control – 20 minute countdown timer initiates once fan is turned on
- Blue LED indicates when the fan is on
- Commercial Grade – 8 Amp max load, 2 year limited warranty
- Engineered to efficiently control current LED lighting and DC motor loads
- For indoor use. Includes matching wall plate
- Complies with ASHRAE 62.2, ENERGY STAR® 3.0 and CALGreen
- One year additional fan warranty available when a Panasonic WhisperCeiling® DC, WhisperValue® DC or WhisperFit® DC fan/light is controlled by a Panasonic Condensation Sensor Plus

Timer and Sensor Settings

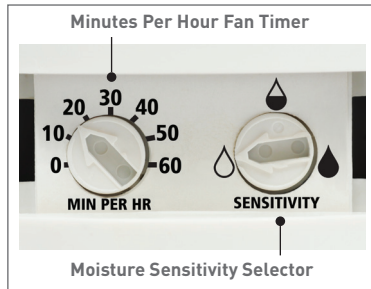

Moisture Sensitivity Selector Settings



Low Sensitivity – The least sensitive setting is used in hotter and more humid climates. In a very moist environment, low moisture sensitivity may be needed to avoid excessive fan run-time.



Average Sensitivity – The Condensation Sensor Plus comes factory set to this most common setting.



High Sensitivity – Setting the Condensation Sensor Plus to its most sensitive setting covers the widest range of humidity. This is a setting for dryer climates and/or larger rooms. In a very dry environment, higher sensitivity is needed.

WhisperControl Condensation Sensor Plus	FV-WCCS1-W	FV-WCCS2-W
Ground	Grounding	Grounding
Feature	Blue LED	Blue LED
Amperage	15 Amp	15 Amp
Maximum Fan Load	8 Amp	8 Amp
Voltage	120 Volts	120 Volts
Termination	6" Leads	6" Leads
Dry Contact Switching	24 Volt AC Input/Output	24 Volt AC Input/Output
Connections (Copper Wire Connections)	Use #14 or #12	Use #14 or #12
Max. Fluorescent Light Load	NA	400 Watt
Standard Certifications	UL/CSA Listed	UL/CSA Listed
Warranty	2 Year Limited	2 Year Limited

On/Off—
FV-WCD01-W (White)
On/Off/Light—
FV-WCD02-W (White)



KEY FEATURES

- Preset the fan timer anywhere from 5-60 minutes
- Adjustable Minutes Per Hour (MPH) Fan Timer ensures consistent and controlled ventilation throughout the day
- Manual On/Off Fan Control
- Blue LED indicates when the fan is on
- Commercial Grade, 8 amp max load, 2-year limited warranty
- Engineered to efficiently control current LED lighting and DC motor loads
- For indoor use. Includes matching wall plate
- Complies with ASHRAE 62.2, and ENERGY STAR® 3.0

Timer Settings



Preset Countdown and Hourly Timer	FV-WCD01-W	FV-WCD02-W
Ground	Grounding	Grounding
Feature	Blue LED Light	Blue LED Light
Amperage	8 Amp	8 Amp
Dry Contact Switching	24V AC input/output	24V AC input/output
Max. Fluorescent Light Load	N/A	400 Watt
Termination	6" Leads	6" Leads
Standard Certifications	UL/CSA Listed	UL/CSA Listed
Warranty	2 Year Limited	2 Year Limited

Accessories



Current Problem:

Poor airflow resulting in callbacks

EZ Solution:


Optimized airflow means fewer callbacks

Terminate callbacks

Save time and money with pre-soffit installation

As you know, fewer trips to the job site mean a better bottom line. Current practices and products for venting fans at the soffit can lead to poor system performance. The new EZSoffitVent from Panasonic is the only HVI certified termination system that lets you complete all the ducting before the soffit is installed. This helps you obtain optimal airflow, so you get fewer callbacks resulting in lower costs. It also eliminates water intrusion costs associated with roof and/or wall terminations. EZSoffitVent can be rotated to align with duct work and a low resistance back damper eliminates drafts and improves blower door test results.

FV-WC10VE1

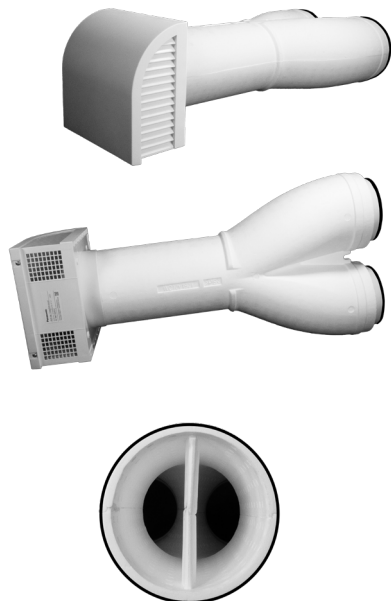

KEY FEATURES

- Designed for use with WhisperComfort® ERV
- Air flow rated up to 100 CFM per side
- The material composition for the duct is expanded polystyrene and polypropylene for the cap
- Duct length is 26-7/8"
- Cap height is 10-3/8" and depth of 4-15/16"
- 3-year warranty

EZSoffitVent™

Versatile Soffit Termination System

EZSV14



EZSoffitVent installed


KEY FEATURES

- Patented soffit termination system ideal for new residential construction
- First-to-market, HVI-Certified soffit vent helps optimize airflow by letting you complete all ducting before soffit panel install
- High performance soffit vent improves overall fan performance and reduces call backs due to poor airflow
- Simple, one-stop installation helps reduce total installed costs (callbacks, labor and parts)
- Unique design eliminates water intrusion costs associated with roof and/or wall terminations
- EZSoffitVent body snap-fits easily into mounting bracket and can be rotated 180 degrees to align with ducting
- Low resistance backdraft damper eliminates cold drafts and improves blower door test results



1 - With any use for intake air, you must remove the damper. It's also recommended you add an insect screen (not included).

PC-RD06C6

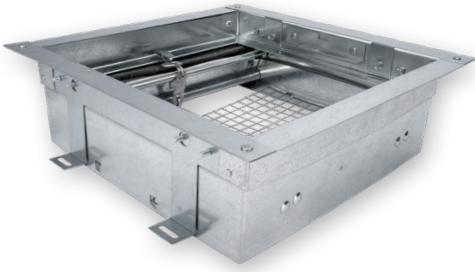

KEY FEATURES

- One damper for both Combustible and Non-Combustible assembly ratings
- Damper allows for two-stage construction; fan housing and damper sleeve during framing, fan/motor/damper installation after finishes
- Damper allows access to fan/motor/damper for maintenance
- Approved for WhisperGreen® Select, WhisperCeiling® DC, WhisperSense® DC, WhisperFit® DC, and WhisperValue® DC 10 1/4" 50-150 CFM fans*, fan/lights and fans with motion sensor
- Galvanized steel frame with 165°F fusible link
- High temperature, non-asbestos, reinforced fiber thermal fabric damper
- 5-year warranty

Damper Model
PC-RD06C6

UL Approved for the Following Fan Models:*

WhisperGreen® Select,
WhisperCeiling® DC,
WhisperSense® DC,
WhisperFit® DC,
WhisperValue® DC




*Please see product submittal for approved model numbers

–UL and Warnock Hersey 555C classification for 1, 2 or 3 hour Non-Combustible Assemblies

–UL 555C classification for the following 1 hour UL Wood Truss Assembly Ratings: L521, L528, L546, L558, L562, L563, L574, L576, L581, L583, L585, L592, M503, M509; P-522, P-533, P-538, P-544, P-545, P-547 and P-548

Optional Designer Grilles

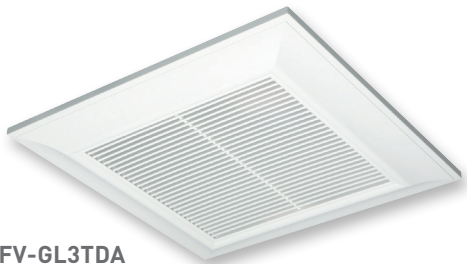

FV-GL3TDA



FV-GL3TDB

KEY FEATURES

- Easy and affordable to change
- Change your grille to fit your room decor without compromising the performance and quality of the unit

	FV-GL3TDA	FV-GL3TDB
Characteristics		
Grille Size (inches sq.)	13	14-1/5
Shipping Gross Weight (lbs)	1.1	1.3
Trend Style Category	Traditional	Traditional
Material	ABS	ABS
UL Approved ¹	Yes	Yes
HVI Certified ¹	Yes	Yes
Mfg. in ISO 9001 Certified Facility	Yes	Yes



KEY FEATURES

- Multi-switch combination devices save space and add convenience
- Engineered to efficiently control current LED lighting and DC motor loads
- Common feed shunted internally to all switches
- Elegant decorator styling provides multiple controls in a single gang wall box
- Fits single gang box / includes matching wall plate
- Commercial grade
- 2-year limited warranty

Specifications	FV-WCSW21-W	FV-WCSW31-W / FV-WCSW41-W /FV-WCSW31-W
Ground	Grounding	Grounding
Feature	Single Pole / Single Pole	Single pole / double throw on-off-on switch, two single pole on-off switches
Amperage	15 Amp	Individual Switch Amperage 15 Amp Total Switch Amperage 20 Amp
Voltage	120 Volt	120 Volt
Terminations	Side Connection	Quickwire and wire leads
Standards & Certifications	UL/CSA Listed	UL/CSA Listed
Warranty	2 Year Limited	2 Year Limited



Recessed Inlet®

FV-NLF46RES 4" or 6" Duct



Design Solution for Exhaust or Supply Inlets

KEY FEATURES

- Includes (1) replaceable 8W GU24 base LED lamp, JA8 compliant for CA Title 24 and Title 20
- Multi-purpose exhaust and supply recessed inlet is ideal for use with remote mount in-line fans and ERVs
- Can be used as a light only option matching the WhisperRecessed® LED fan with a dimmable LED light
- Incorporates an architectural grade recessed can light design
- Beautiful lighting with 6" aperture and advanced luminaire design
- Insulation contact rated



LED Lamp

Includes: (1) 8 Watt GU24 base LED lamp /2700 Kelvin Warm White/>92CRI/720 lumens/90 LPW/ JA8 compliant for CA Title 24 and Title 20, 25,000 rated average life.



FV-WCPT1-W

Fan/Light Control,
Delay Timer
Wall plate
not included



FV-WCPR1-W

Fan/Light Control,
Delay Timer
Wall plate
not included*



KEY FEATURES

- Earn ENERGY STAR® points for enhanced exhaust ventilation
- Replaces both fan and light switches for one easy operation
- Microprocessor technology provides precise ventilation times
- Programmable DELAY and VENTILATION settings
- Excess manual and/or delay operation is subtracted from the next hours programmed ventilation time
- Works with ALL incandescent, CFL, fluorescent and LED lights
- Make standard bath fans ASHRAE 62.2 compliant when used with ASHRAE 62.2 compliant fans

Configuring Ventilation Time

In order to properly set the VENTILATION time on your SmartExhaust™, you will need to know the code required CFM (Cubic Feet Per Minute) for your home and the fan CFM. Follow this simple equation to calculate the VENTILATION minutes per hour.

$\frac{\text{Code Required Ventilation in CFM}}{\text{Fan CFM}} = \text{Hour Fraction}$	
$\text{Hour Fraction} \times 60 \text{ Minutes} = \text{Ventilation Settings in Minutes}$	

CFM = Cubic Feet Per Minute

*Rocker style not compatible with all LED bulbs
Dimmable LED bulb recommended

SmartExhaust™ Settings:

VENTILATION setting allows the user to set the number of minutes per hour the fan should run.

DELAY setting allows the user to set the number of minutes the fan should run after the bathroom light has been turned off. This setting provides additional run time for the fan to complete the remaining necessary ventilation after use.

SmartExhaust™ replaces an existing switch; there are no additional labor costs required for installation. Simple and economical fan and light operation is provided by one switch.


Example

The SmartExhaust™ has a microprocessor in it that reads the two settings dials. If, for example, the VENTILATION dial is set to 20 minutes/hour, the microprocessor will subtract 20 minutes from 60 minutes and determines that the SmartExhaust™ needs to come on 40 minutes into the hour and run for the remaining 20 minutes of that hour.


If the DELAY dial is set to 10 minutes and the light/fan switch is manually turned on for 5 minutes, the microprocessor will keep track of the 5 minutes of use. When the switch is turned off after the 5 minutes, the microprocessor will continue to run the fan for the 10 minutes of DELAY setting adding up to a total of 15 minutes. The 15 minutes will be subtracted from the total required 20 minutes of VENTILATION time. 55 minutes into the hour, the fan will turn on and run for the 5 additional minutes needed to complete the required ventilation.

See diagram for more details

A Normal Hour of Operation with no occupancy

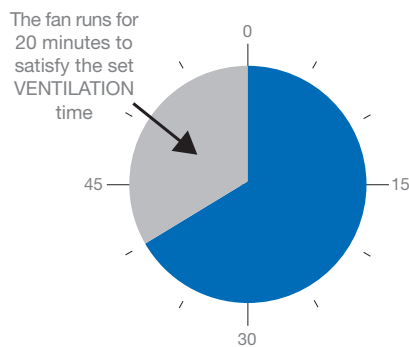

The Bathroom is occupied for 5 minutes

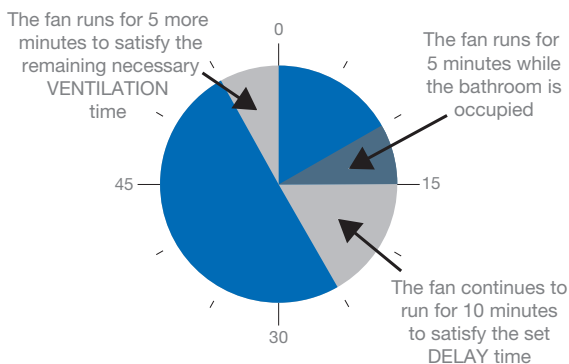


Appendix




FV-0511VK3 50-80-110

FV-0511VKS3 30-110

- Fan with multi-speed tested with 6" duct
- Certified Performance with 4" duct available

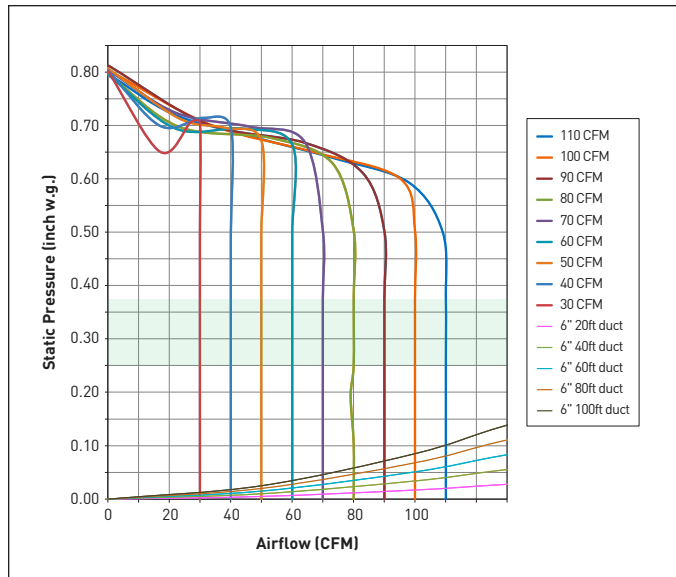


FV-1115VK3 110-130-150 Base Fan + FV-VS15VK1 50-150 Tested with 6" duct

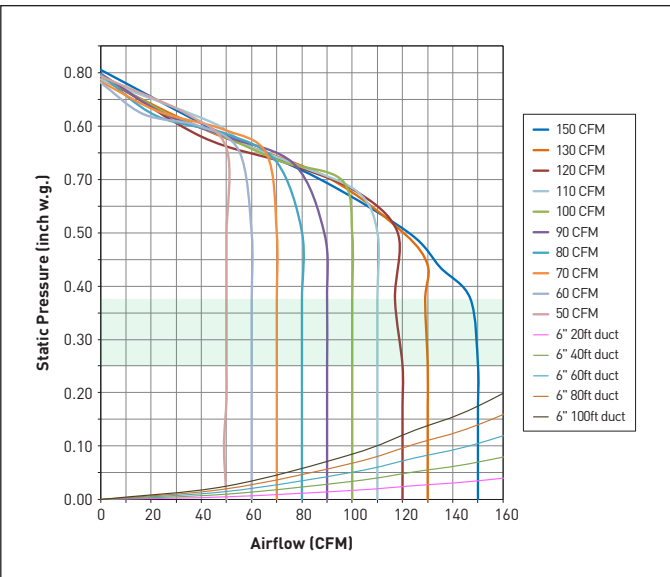


FV-0511VKS3S 30-110

- Architectural Grille Fan with multi-speed tested with 6" duct
- Certified Performance with 4" duct Available

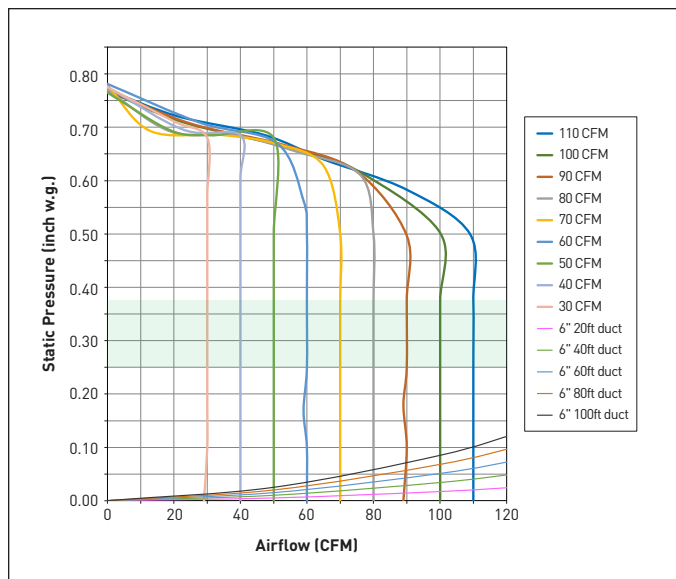


FV-0511VKSL3K 30-110

- Architectural Grille LED Fan with multi-speed tested with 6" duct
- Certified Performance with 4" duct available

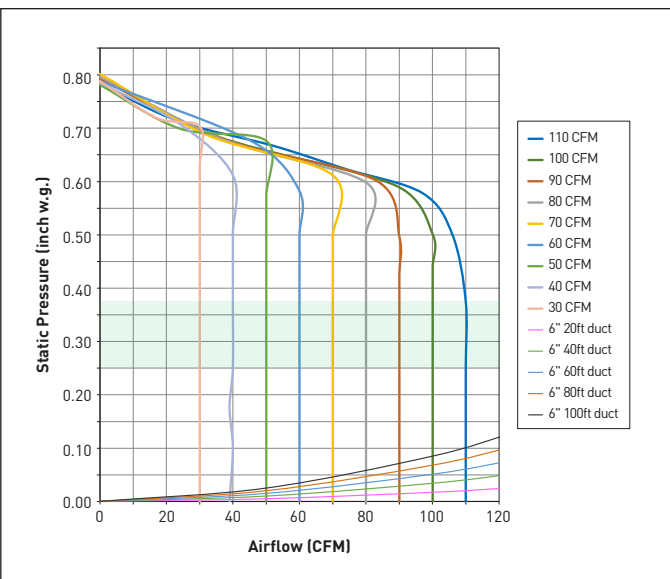


FV-1115VKL3 110-130-150 Base Fan +
FV-VS15VK1 50-150 Tested with 6" duct

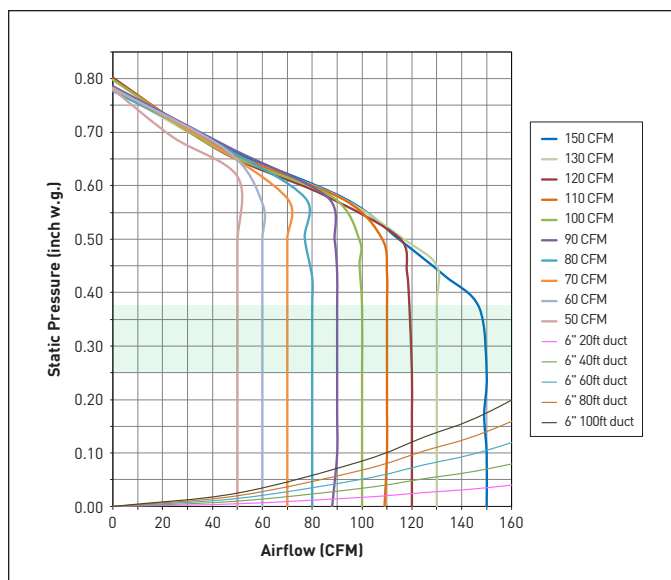


FV-0511VKL3 50-80-110
FV-0511VKSL3 30-110


- Fan + LED with multi-speed tested with 6" Duct
- Certified Performance with 4" duct Available

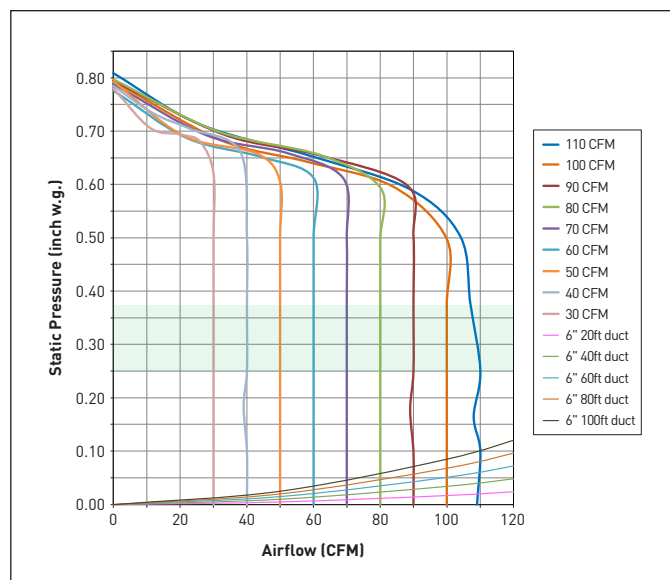


FV-0510VS1 50-80-100 CFM 4" Oval Duct

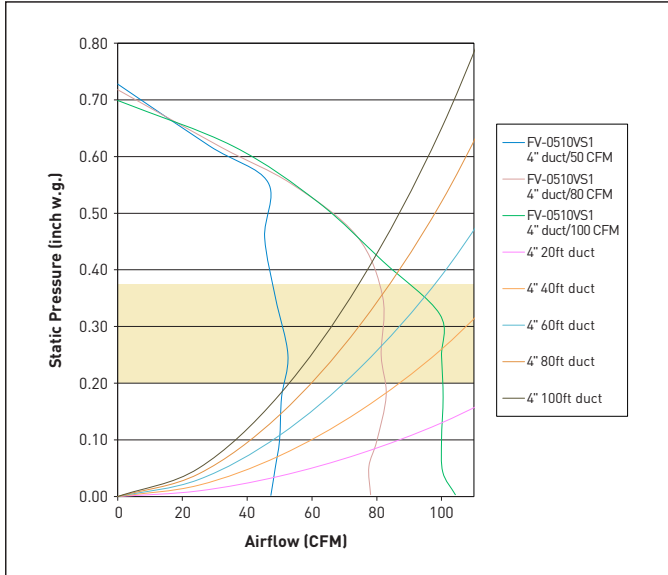


FV-0810VSS1 80-100 CFM 4" Oval Duct

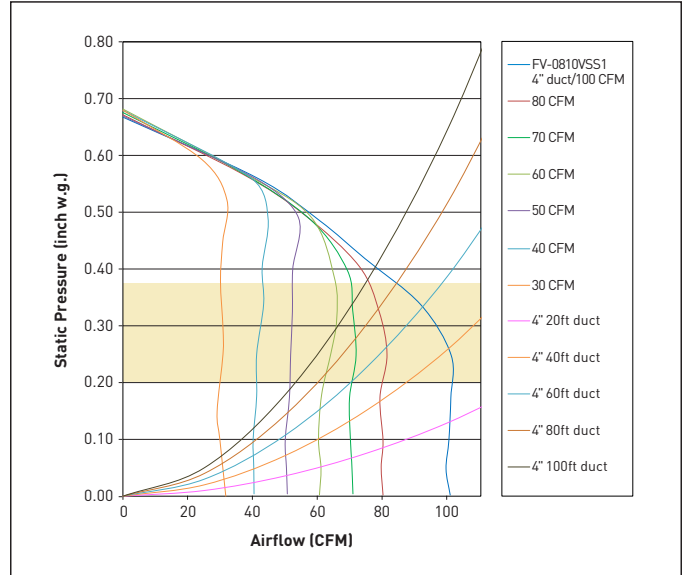


FV-0510VSL1 50-80-100 CFM 4" Oval Duct

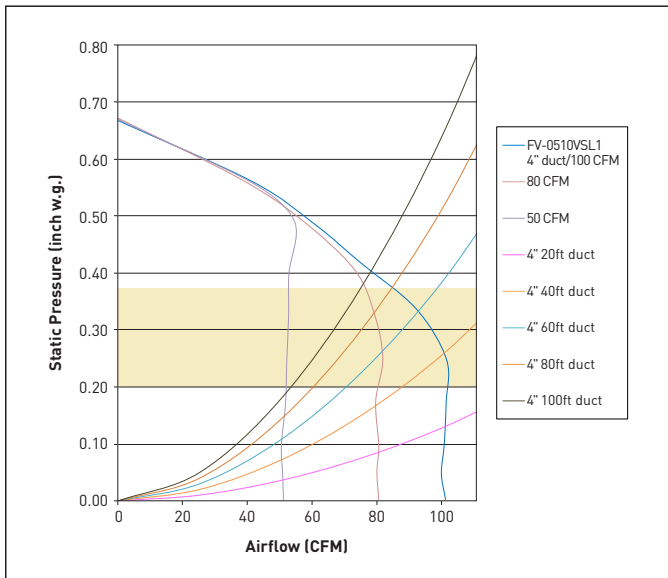


FV-0810VSSL1 80-100 CFM 4" Oval Duct

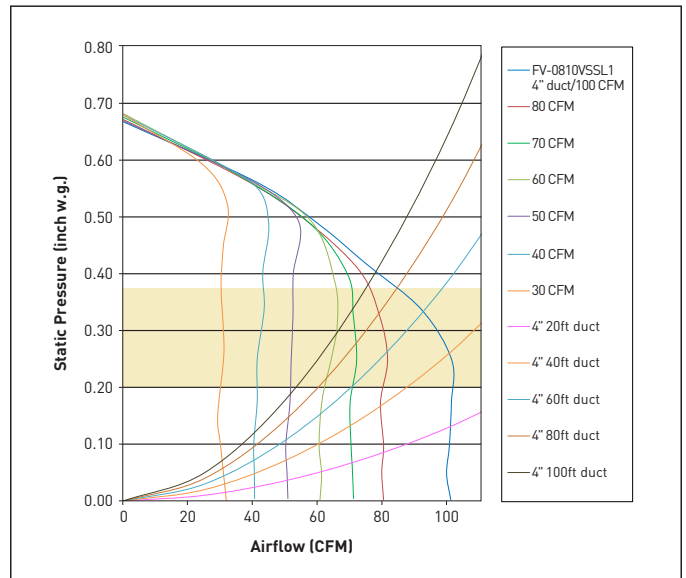


FV-0510VSC1 50-80-100 CFM 4" Oval Duct

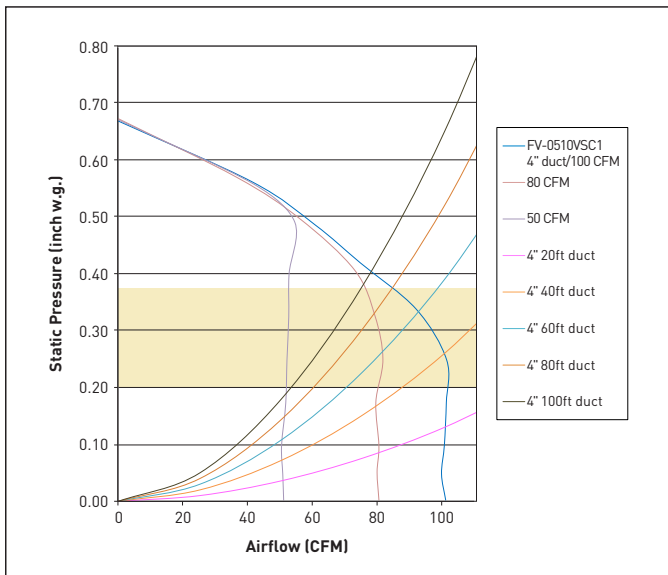


FV-0510VSL1 50-80-100 CFM 4" Oval Duct

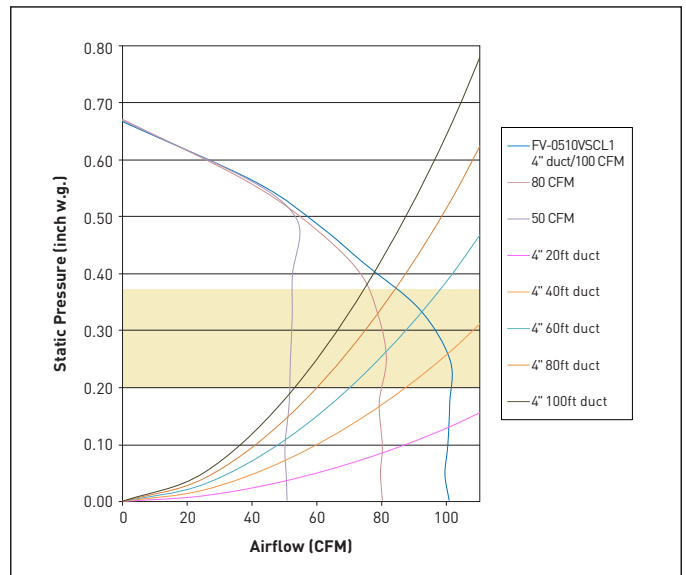


FV-0511VF1 - 3" Duct

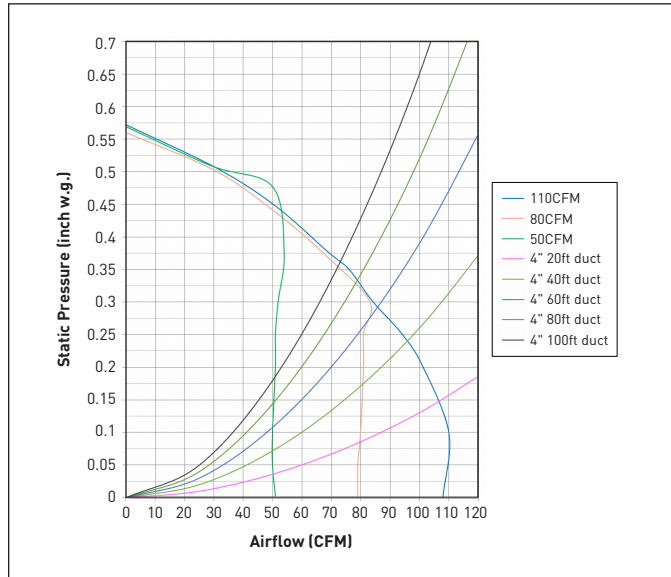


FV-0511VFC1 - 3" Duct

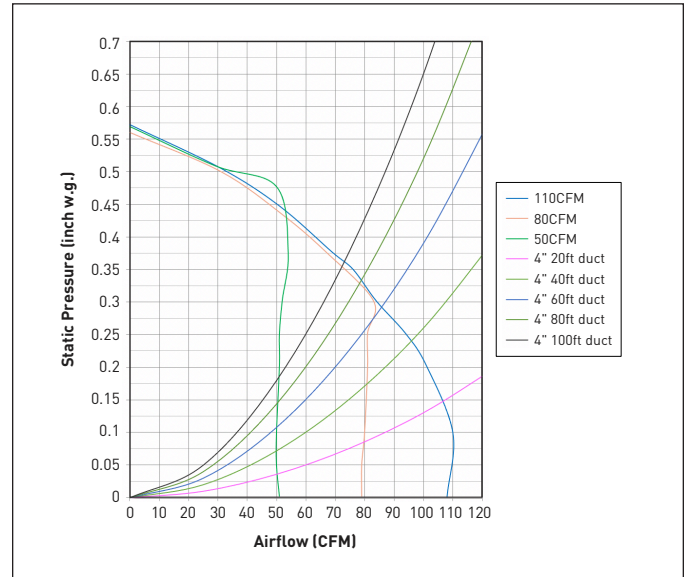


FV-0511VF1 - 4" Duct

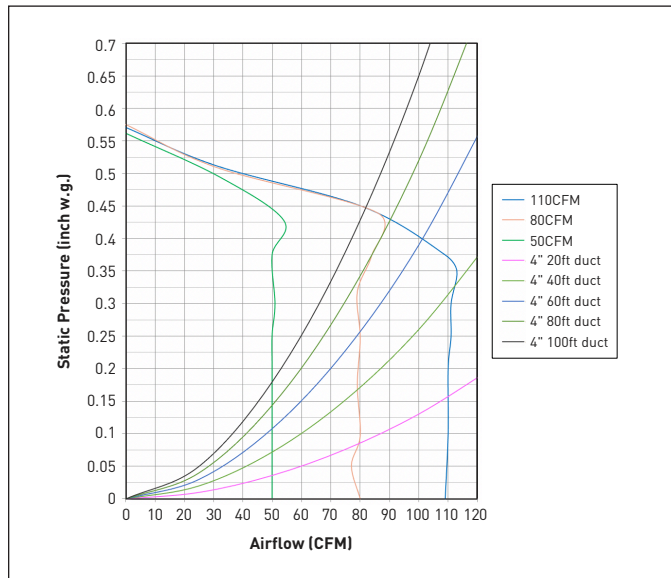


FV-0511VFC1 - 4" Duct

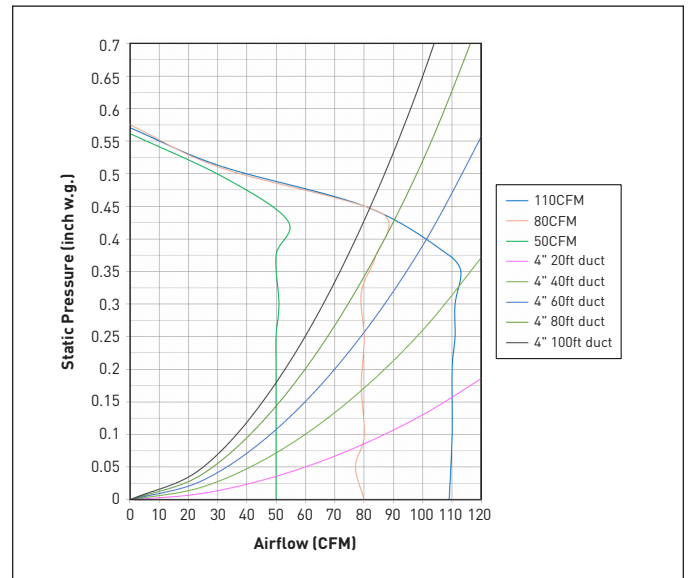


FV-0511VFL1 - 3" Duct

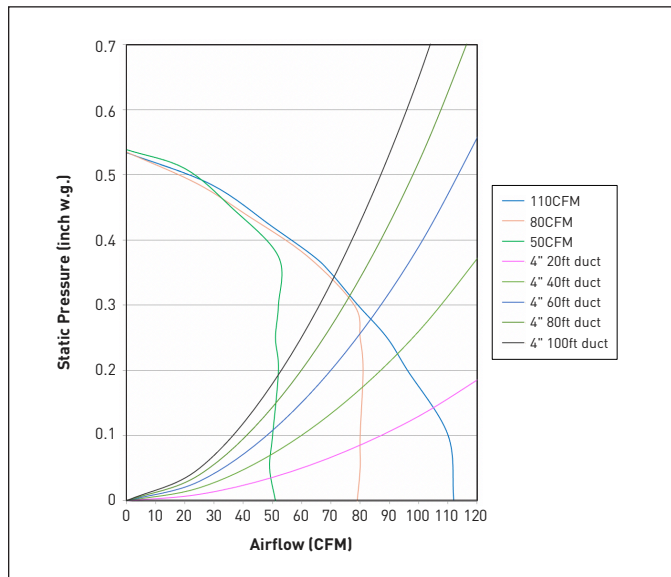


FV-0511VFL1 - 4" Duct

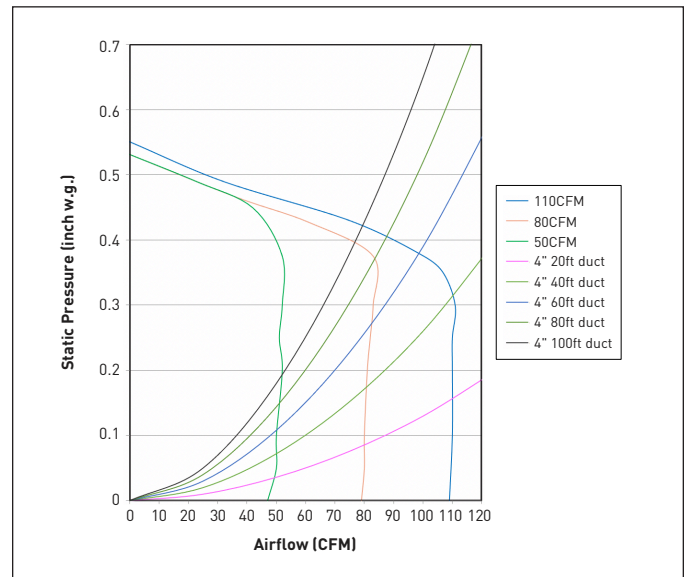


FV-0511VFB1 - 3" Duct

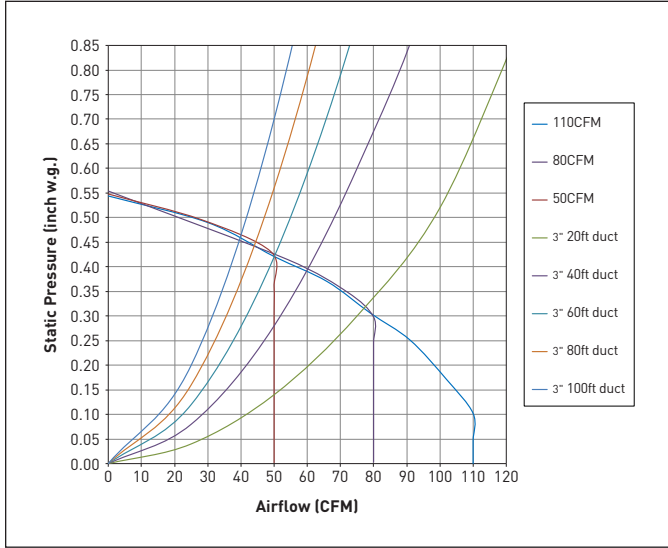


FV-0511VFB1 - 4" Duct

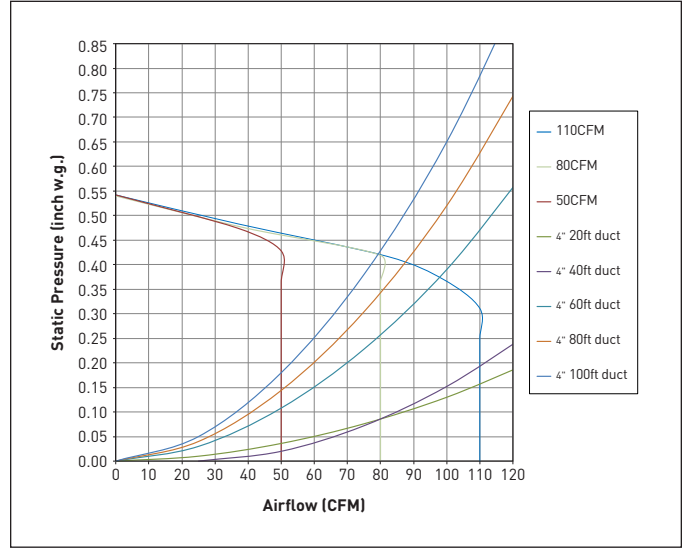


FV-0511VQ1 50-80-110 CFM 4" or 6" Duct

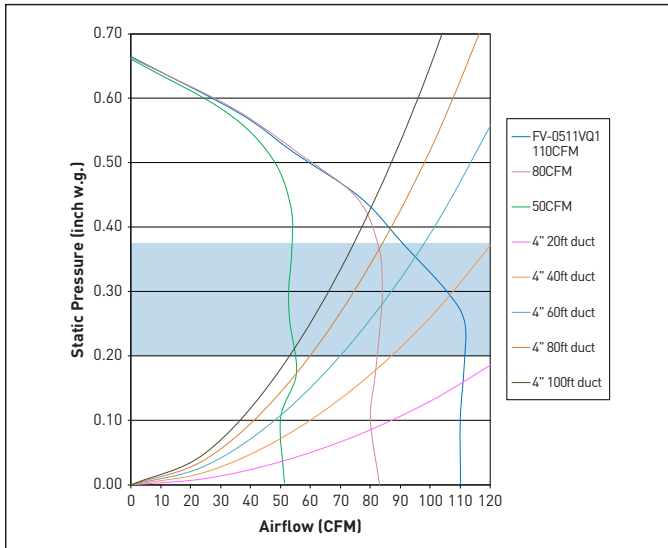


FV-1115VQ1 110-130-150 CFM 6" Duct

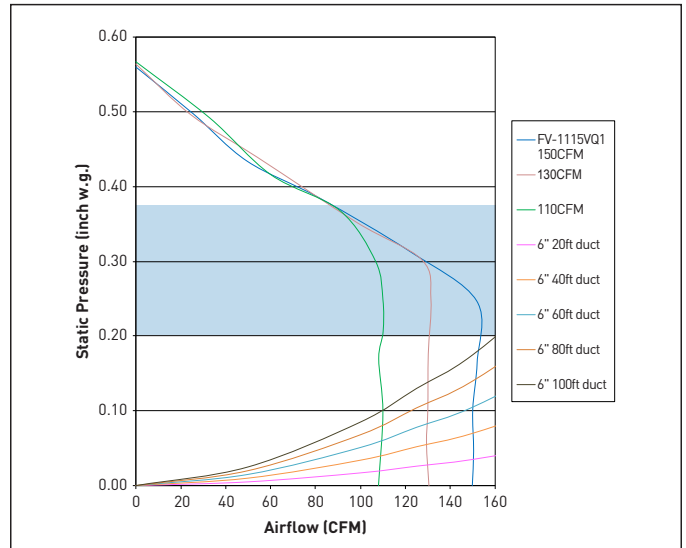


FV-0511VQL1 50-80-110 CFM 4" or 6" Duct

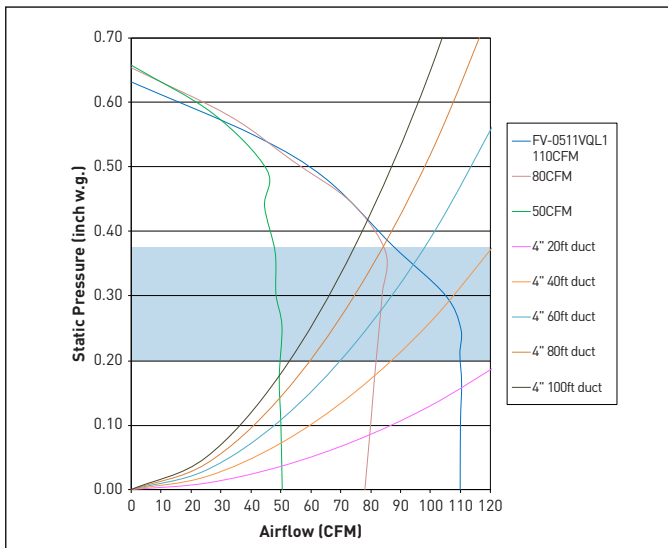


FV-1115VQL1 110-130-150 CFM 6" Duct

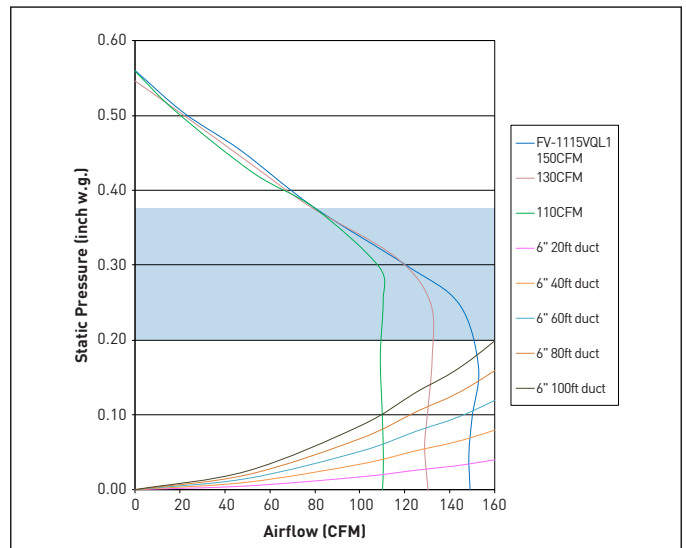


FV-20VQ3 190 CFM 6" Duct




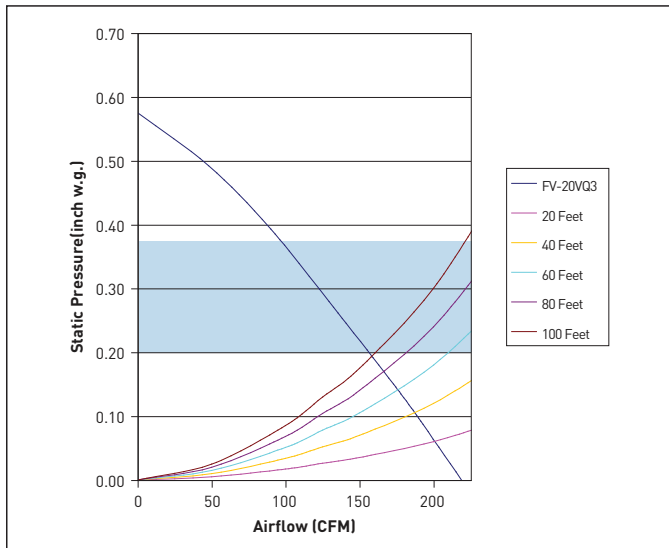


FV-30VQ3 290 CFM 6" Duct

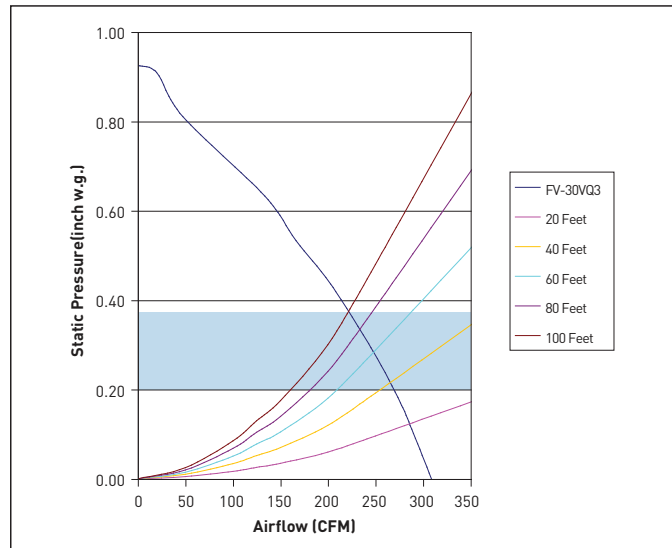


FV-40VQ4 390 CFM 6" Duct

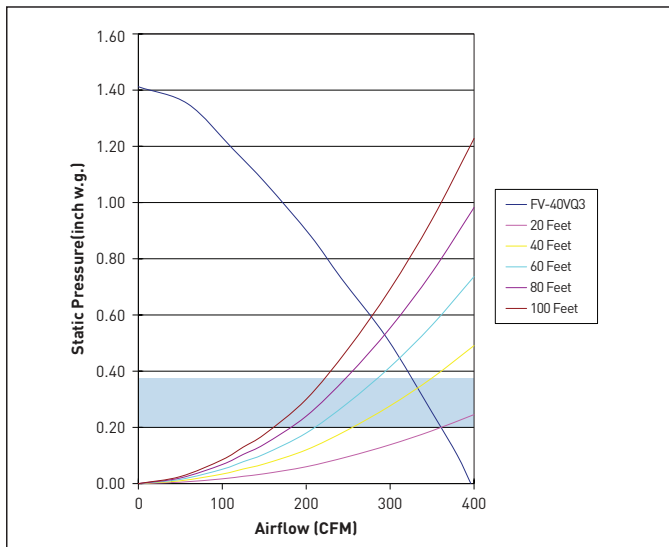


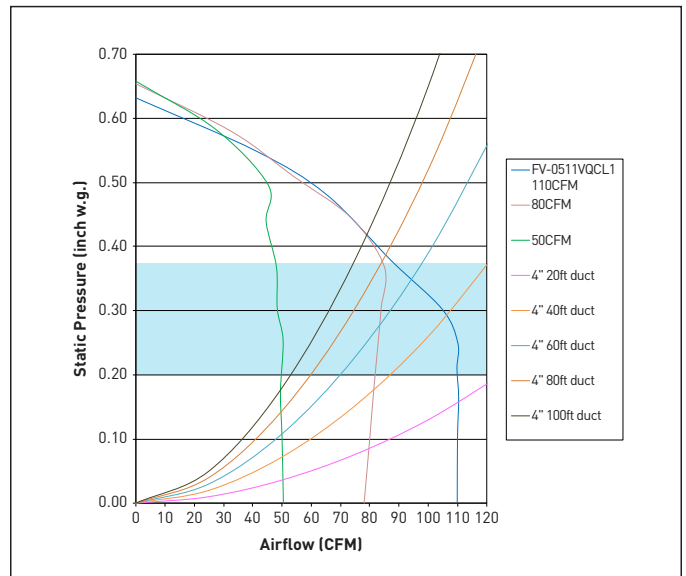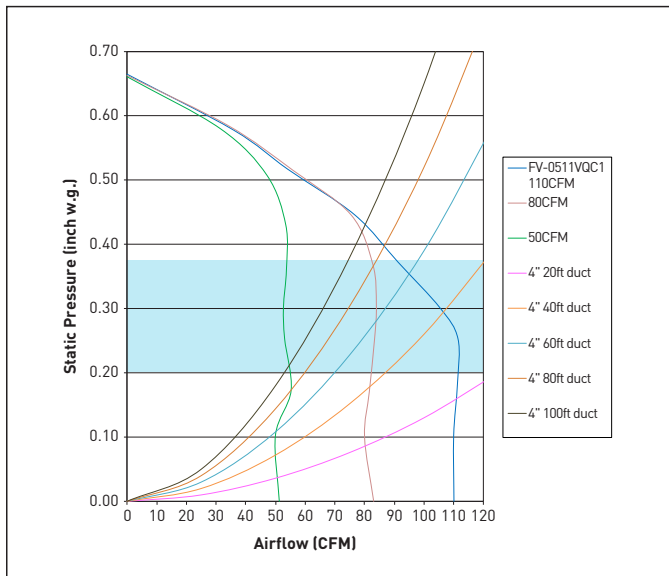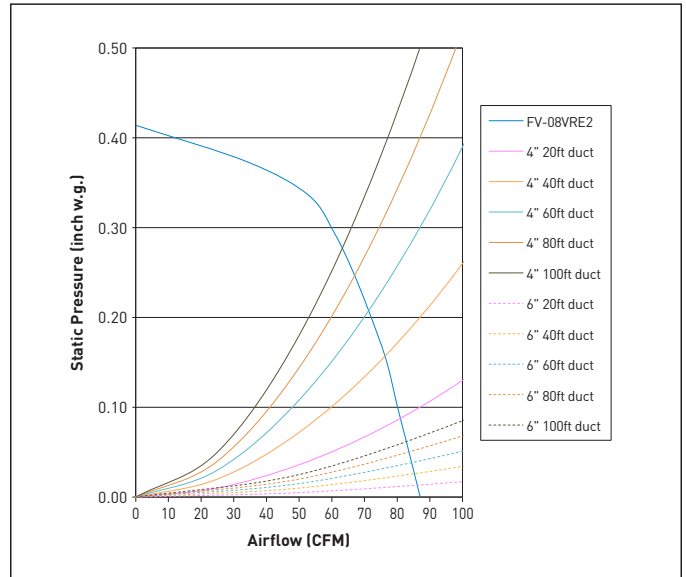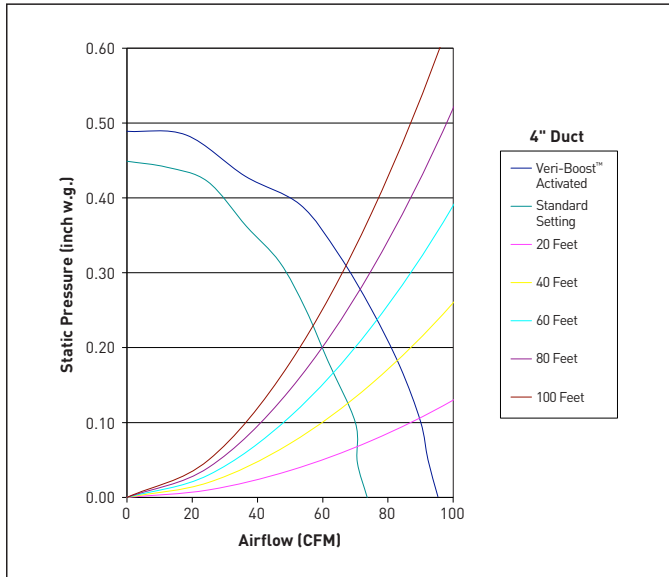


FV-0511VH1 110 CFM 4" Duct

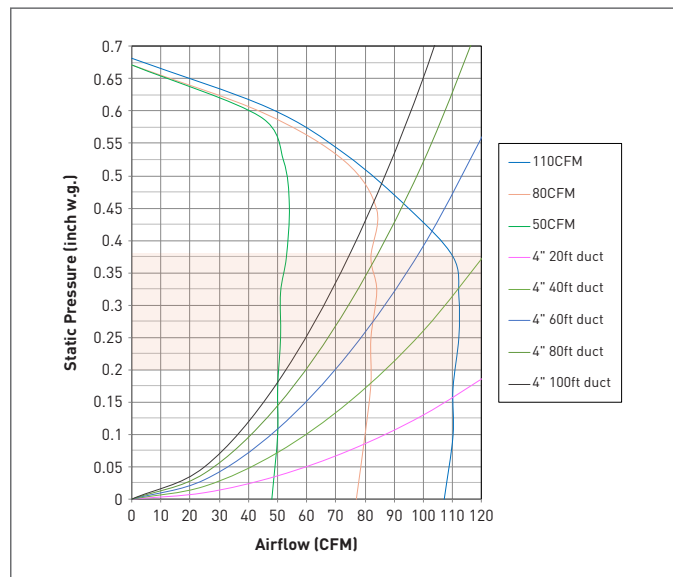

FV-0511VHL1 110 CFM 4" Duct

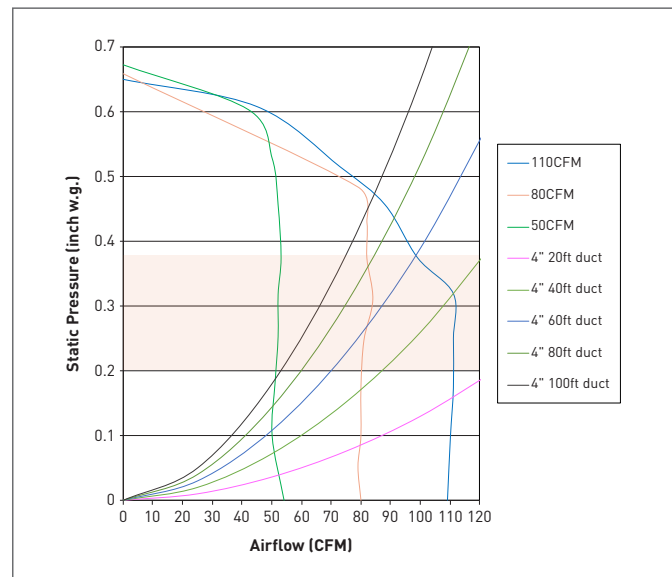


FV-15NLFS1H 50-150 CFM 6" Duct

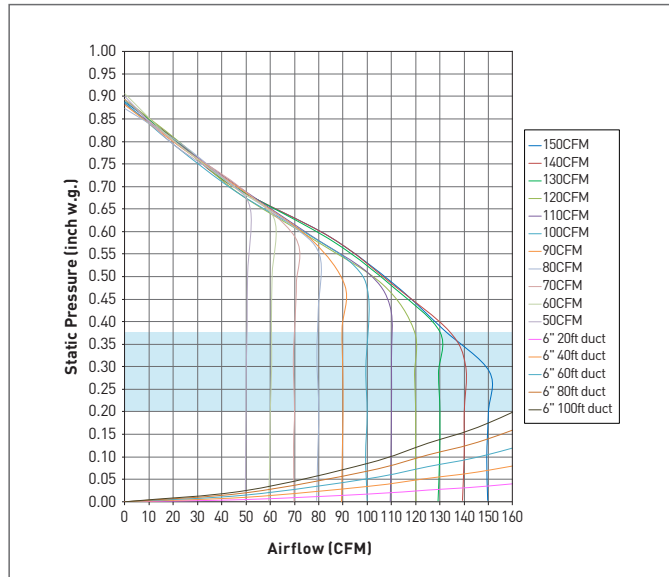


FV-13NLFS1 20-130 CFM 6" Duct

FV-13NLFS1 20-130 CFM 6" Duct

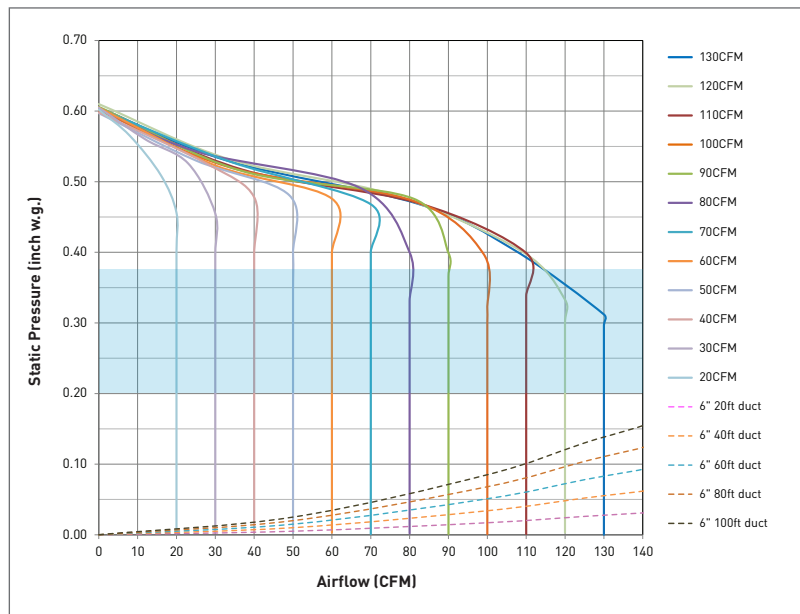


Recessed Inlet®

FV-NLF46RES 4" or 6" Duct*

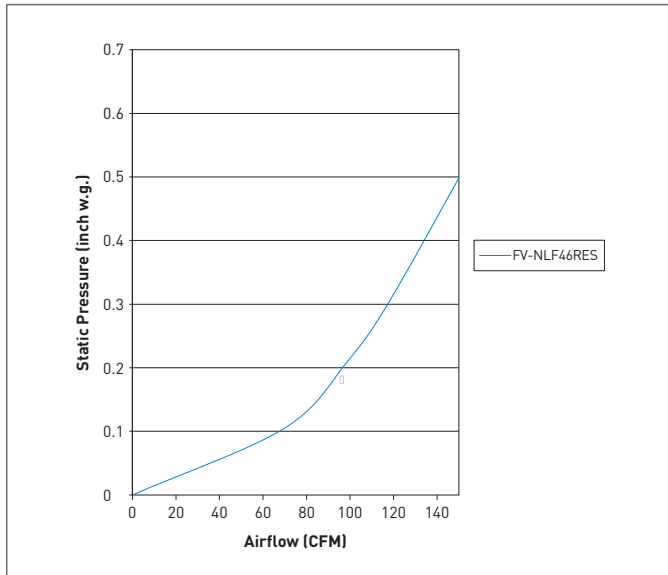


*Data is not HVI certified as there is no testing standard.


FV-21VEC1T Net Supply

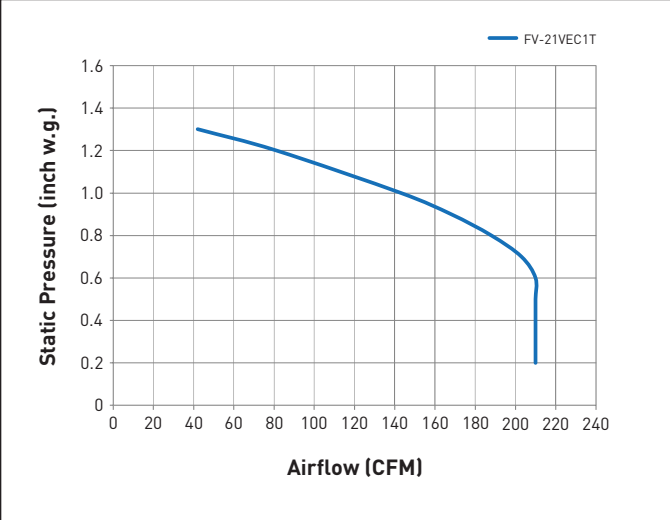


FV-21VEC1S Net Supply

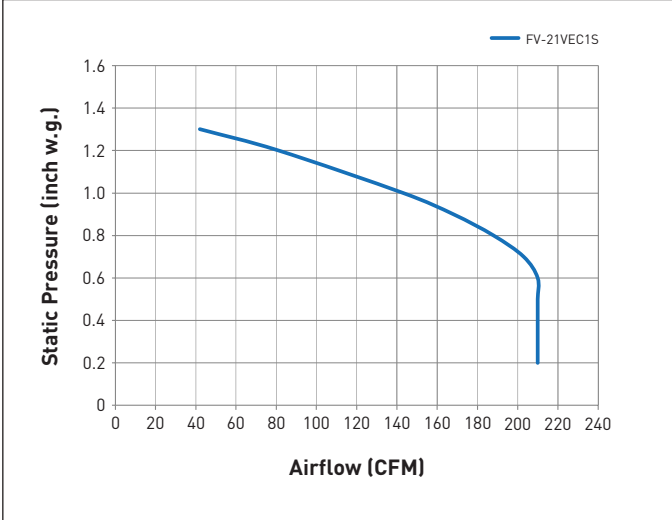


FV-16VEC1T Net Supply

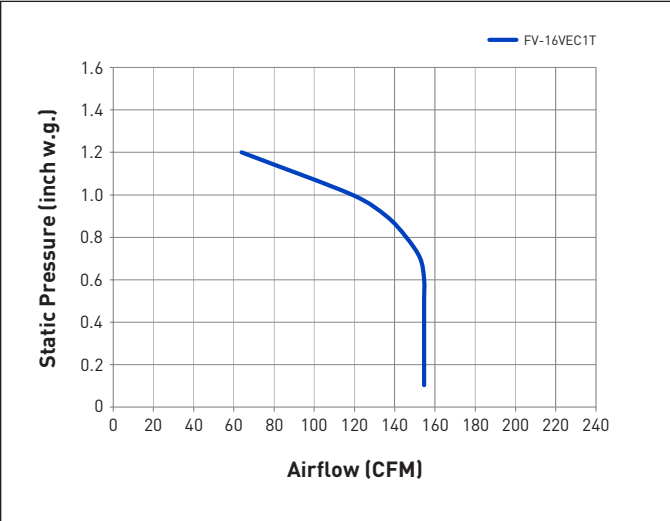


FV-16VEC1S Net Supply

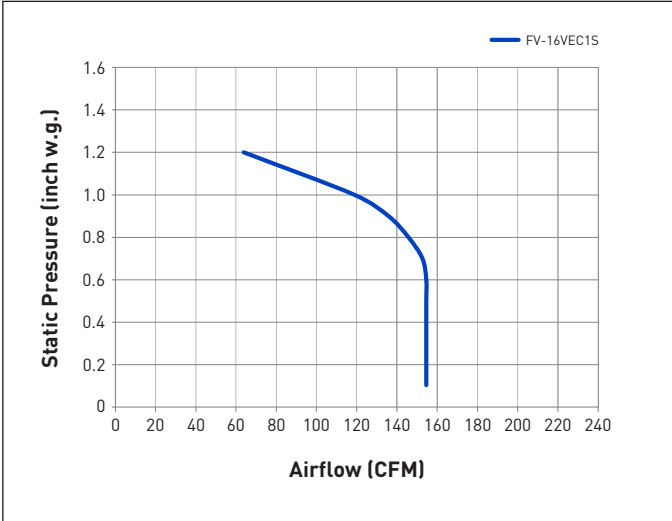


FV-13VEC1T Net Supply

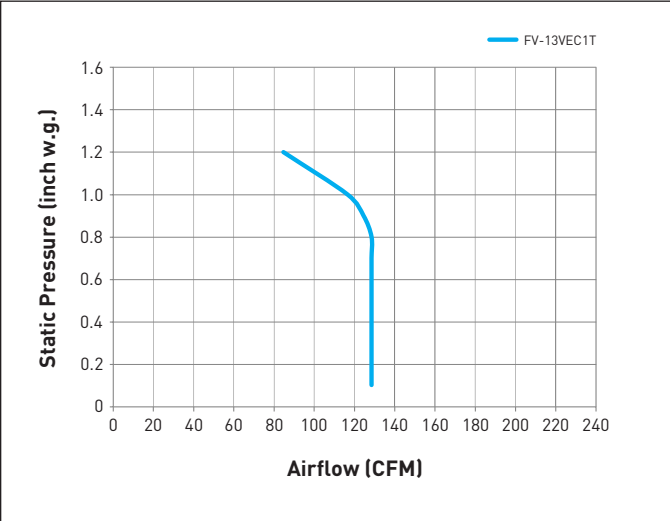


FV-13VEC1S Net Supply

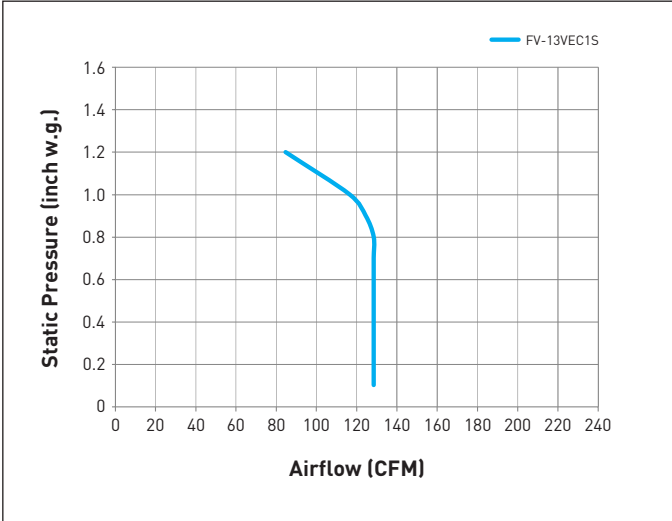


FV-15VE1T Net Supply

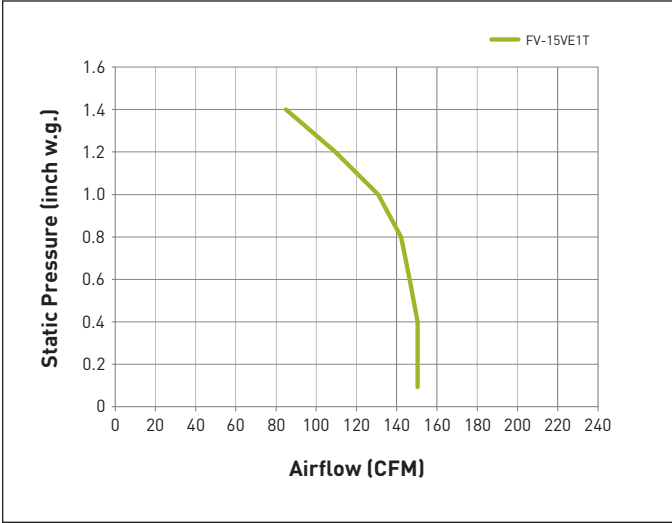


FV-15VE1S Net Supply

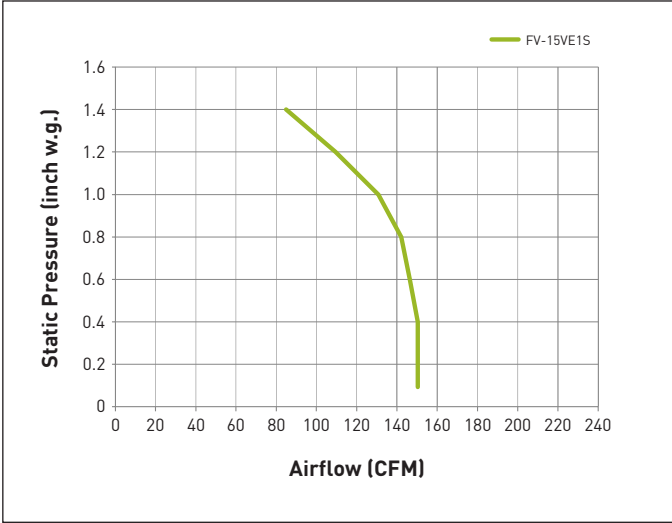

FV-12VE1T Net Supply

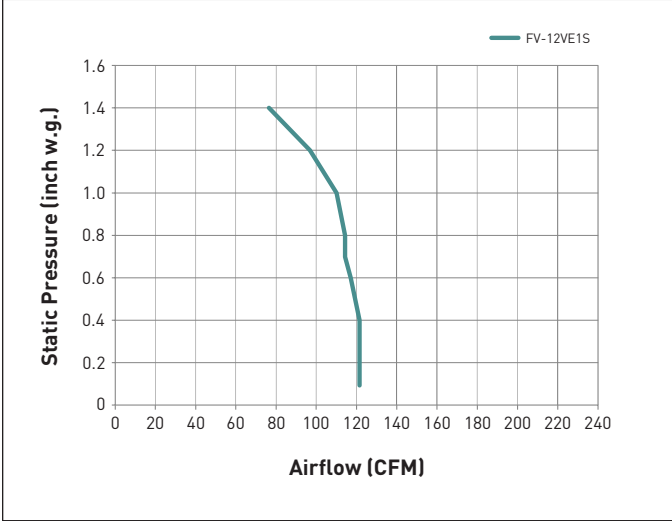


FV-12VE1S Net Supply

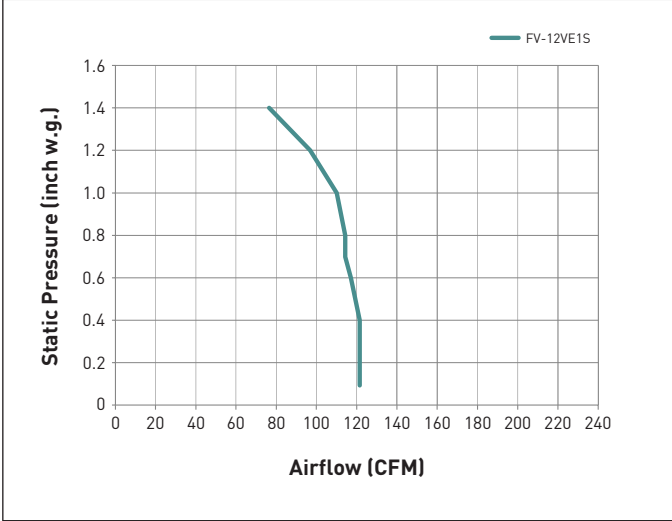

Elite Plus+ - Plug-in/Hardwired/Mirror

FV-15ESC1 (Any Climate)


FV-12ESC1 (Any Climate)

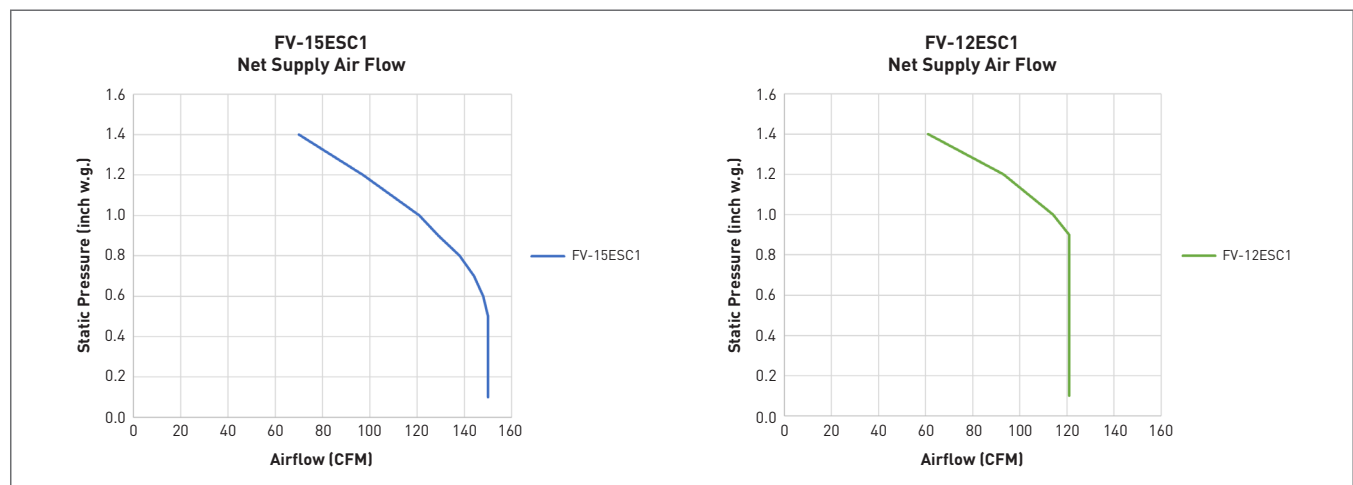

Elite - Plug-in/Hardwired/Mirror

FV-14ES1 (Temperate Climate)

FV-11ES1 (Temperate Climate)

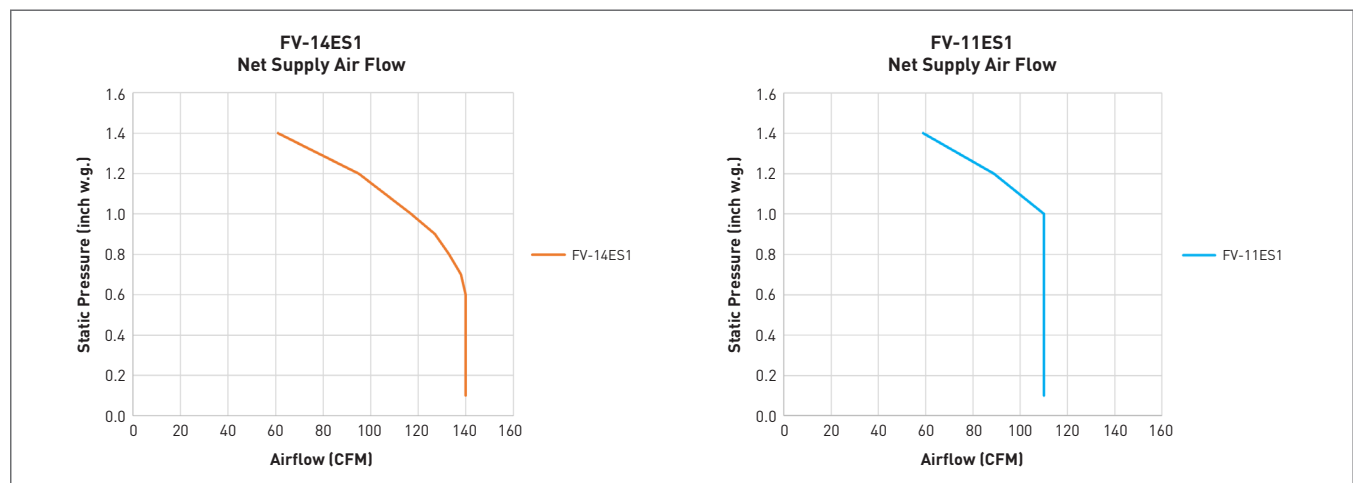

FAQs

Frequently Asked Questions

1. What is a sone?

A sone is an internationally recognized measurement of sound output. The smaller the sone, the quieter it is. Likewise, the higher the sone, the louder the sound.

2. What is CFM?

CFM or Cubic Feet per Minute is a measurement of rate of air flow. The larger the CFM, the more air will be exhausted from the space.

3. What is static pressure?

Static pressure is a measure of the resistance a fan must push air through a duct. Static pressure is measured in inches of water column, and gauges how well a fan can overcome resistance. It is expressed as "in. w.g." or inches water gauge. So, a fan rated at 0.1 in. w.g. has less resistance than one rated at 0.25 in. w.g. Most fans are rated at 0.1 in. w.g. and 0.25 in. w.g. to show performance under different conditions.

4. Why are Panasonic fans so quiet?

Panasonic fans utilize the same aerodynamic blade design from the company's world-class air moving products. A small wheel that moves large amounts of air at lower speeds is the key to quiet operation. The Panasonic

blower wheel is designed more efficiently than most competitor models, so it turns at lower RPM, reducing tip speed and noise.

Quiet Motor

Panasonic is the first ventilation fan manufacturer to incorporate a DC motor in residential mechanical ventilation fans. The WhisperGreen® Select, WhisperCeiling®, WhisperSense®, WhisperValue®, WhisperFit® Fan Series feature a removable, permanently lubricated, plug-in DC motor designed for long life and continuous run applications. DC motors are rated for continuous run and are designed for optimum performance and efficiency. DC motors consume less energy than AC motors and are the most energy efficient motors made.

5. What makes Panasonic fans so highly energy efficient?

The input wattage readings on Panasonic fans are among the lowest in the industry. This means that Panasonic fans use fewer kilowatt hours and cost less to operate than other fans.

This lower wattage draw is accomplished in a number of ways.

Unique Motor Design

Panasonic's DC brushless motor provides superior energy efficiency and is matched with the unique PCB circuit board. The DC motor uses less energy to move larger volumes of air compared to AC motors. WhisperGreen® Select, WhisperCeiling®, WhisperSense®, WhisperValue®, and WhisperFit® fans also incorporate SmartFlow™ technology, which automatically increases the speed of the fan when it senses static pressure, ensuring optimal airflow output. The combination of DC motor and SmartFlow™ technology results in some of the most energy efficient fan motors made.

Condenser Motor Design

Panasonic's condenser motor is enclosed which helps prevent dust from entering the motor. The condenser motor is also designed and rated for continuous run, and employs permanently lubricated ball bearings.

Selective Application

Panasonic builds its own motors and components, which means tight control over quality. Panasonic engineers optimize efficiency by matching the motor and fan blade for the best performance of the fan.

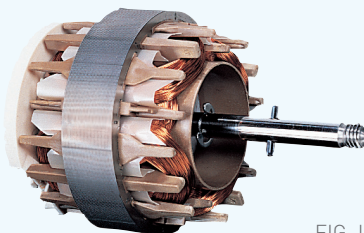


FIG. 1

6. Why do Panasonic fans have such a long life?

Panasonic fans have been designed to give the consumer trouble-free operation for many years. These fans will run continuously for up to twenty years without lubrication of the motor. This is possible because of the high-quality components and materials used in the fans.

Motor Production

Panasonic motor production is fully automated, assuring automatic defect detection. As a result, the company's motors are guaranteed to have a defect rate of less than 0.0006%.

ISO 9001 and ISO 14001 plant

The production facilities that build Panasonic fans have earned the distinction of being recognized by the International Standards Organization (ISO) under the ISO 9001 and 14001 Quality Assurance program. Meeting ISO 9001 and 14001 means that the factory operates with the highest quality standards.

Fan Housing

The fan housing is made of heavy-gauge galvanized steel or ZAM (Zinc, Aluminum, and Steel blend) to resist rust. Built-in metal flanges provide a strong, air-tight barrier and assist with ease of installation. The housing design helps to decrease air leakage in the building envelope during blower door testing.

7. Can installation material be used over bathroom exhaust fans installed in the ceiling?

YES. Loose fill or batt insulation can be placed directly over the fan housing. Panasonic fans are designed to operate in this environment with the necessary clearances that meet code requirements.

8. Can a Panasonic fan be used over a bathtub and in showers?

YES. All Panasonic fans, with the exception of heater and heater/light models, are approved by Underwriters Laboratories for installation over tubs and showers when connected to a GFCI (Ground Fault Circuit Interrupter) protected branch circuit. GFCI is mandated by the National Electrical Code (NEC) for all applications. Used as specified by UL, GFCI is an acceptable means of protection. However, heat ventilation fans that have a heater must be installed at least three feet away from the tub or shower area.

9. Can a Panasonic fan be used above a kitchen range?

No. Panasonic fans are not approved for installation over a range or cooktop. Grease and high temperature may damage the fan motor and cause premature failure. Panasonic fans work well in large kitchens with a remote exhaust hood or downdraft exhaust and a Pana-

sonic ventilation fan to exhaust the general odors and moisture in the greater kitchen area.

10. What's better, a motion sensor or a humidity sensor?

While the humidity sensor checks the amount of moisture at the ceiling, a motion sensor "sees" the occupant coming into the room. The humidity sensor has to be set to either Rate of Rise or Relative Humidity. Depending on how the fan is set up, in certain conditions, it may or may not turn on. For instance, if set for Rate of Rise (how quickly moisture builds up in a room), it might not turn on when there is a steady build-up of humidity over time. On the other hand, a motion sensor will turn on once it senses motion to capture the odors, steam, and chemicals that may be kept underneath the fan. Panasonic's WhisperSense® fans include motion and humidity sensors for ultimate moisture control.

Panasonic's Condensation Sensor Plus or Swidget® Smart Controls with moisture management inserts are more precise ways to control a fan and avoid condensation as they measure relative humidity and air temperature.

11. What are the Home Ventilating Institute (HVI) ratings for Energy Recovery Ventilators (ERV) and why are they important?

Some HVI tests are indicators of ERV performance during the heating and cooling months. Sensible recovery (SRE) measures how well an ERV will recover heat during the heating months. Total recovery (TRE) is a measurement used to predict and compare performance of how well an ERV will work during the cooling season. SRE and TRE are both measured in percentages, (higher is better).

12. What is the difference between an ERV (Energy Recovery Ventilator), and an HRV (Heat Recovery Ventilator)?

The major difference between an ERV and HRV is that the ERV will transfer heat AND moisture between fresh filtered incoming air and outgoing stale air, while an HRV can only transfer heat energy. An HRV must have a condensation line installed to remove moisture, while an ERV does NOT require a condensation line.

13. How do I know whether my ventilation strategy meets my local codes or standards?

While codes and standards are well documented, their adoption is unique to the region and jurisdiction. Therefore, we recommend sending a message to one of our regional specialists to outline the ventilation requirements for your project based on your area.



Ventilation Controls

Selecting a suitable control that runs ventilation at the proper time and duration will protect the occupant's comfort and building structure. Fan controls can also be used in combination with each other to provide both intermittent and continuous ventilation. For example, WhisperGreen® Select fans with Panasonic's patented Plug' N Play modules are designed for double duty, providing intermittent and continuous ventilation. The key to selecting the proper control or combination of controls is first understanding the occupant's lifestyle and ventilation needs. Then choose a control that provides proper ventilation with little or no involvement by the occupant.

Manual controls: Manual controls require the occupant to activate the ventilation fan when needed. The Panasonic FV-WCSW21 On/Off rocker switch for light and fan control is an example of primary manual control. However, other controls may be more suitable to the occupant's lifestyle. For example, our [S16008WA] 20 – 40 – 60 minute timer wall control allows the occupant to either turn the fan off directly or run for a determined time and turn itself off automatically.

Electronic timers: Electronic timers are more decorative and allow the occupant to select a time duration with the push of a button. Electronic timers do not produce the annoying ticking sound that crank timers are known for. WhisperGreen® Select and WhisperSense® fans incorporate quiet electronic controls. Other controls may be more suitable to the occupant's lifestyle. For example, our [S16008WA] 20 – 40 – 60 minute timer wall control allows the occupant to either turn the fan off directly or run for a determined time and turn itself off automatically.

Occupancy (motion) sensors: Occupancy sensors are suitable for intermittent ventilation. An advantage is that the ventilation system will operate without relying on the occupant's interaction. Instead, the ventilation system will remain "on" and continue working after the occupant has left the room, much like a delay-off timer. WhisperGreen® Select

fans can be customized to include an occupancy feature with the SmartAction® Motion Sensor Plug' N Play® module. The WhisperSense® family of fans has an occupancy sensor integrated into the fan grille.

Humidity and moisture sensors:

Humidistats and Condensation Sensors turn a ventilation system on/off when relative humidity reaches a certain level. However, humidistat controls can have a few disadvantages. One disadvantage is that seasonal changes in outdoor relative humidity necessitate seasonal readjustments to function optimally. As well, humidity controls do not automatically sense and remove odors.

The Panasonic FV-WCCS1 Condensation Sensor Plus features intelligent and advanced sensor technology that monitors humidity and temperature to anticipate dew point, automatically operating the fan to control moisture. Its built-in automatic seasonal adaptability with an optional Moisture Sensitivity Selector also allows fine-tuning for dry or moist environments. Panasonic offers several fan families that can accommodate motion and humidity sensors for ultimate moisture control.

Smart Controls: Smart Controls combines the functionality of manual and automatic controls while incorporating pre-programmed customized rules to match customer needs.

Swidget® Smart Devices and interchangeable Swidget® Wi-Fi-enabled inserts empower homes to live smartly. In addition to incorporating power management options, they are the only devices in the industry to offer insertable IAQ sensors to effectively and efficiently manage air quality in a home. Swidget® controls can provide a complete whole-house IAQ and energy management solution with devices and sensors distributed throughout a home.

The system's flexibility is completed using the Swidget® App to remotely monitor each device, with an optional connection to Alexa or Google Assistant for voice control.

Sizing

Information and Instructions

Equivalent Duct Length (EDL): The Equivalent Duct Length Table (Figure B) shows you how to calculate the equivalent straight duct length in order to overcome static pressure. The EDL chart helps ensure fan performs as expected under the airflow resistance caused by the listed components.

A ventilating fan's performance is plotted on a graph called a performance curve. The performance curve shows airflow in cubic feet per minute (CFM) along the horizontal axis and static pressure (resistance) along the vertical axis.

Figure A shows how a performance curve works. The fan with a "Closed Duct" has high static pressure and no airflow; and the fan with "No Duct" has low static pressure and high airflow. In reality, an installed fan will be somewhere in between these two points.

Sizing and selecting a Ceiling Mounted Fan:

Proper sizing requires that you determine the needed CFM, the square footage of the room or home, and the length and type of duct.

Example: Sizing for an 8 ft x 10 ft x 8 ft ceiling bathroom using 12 foot long, 4 inch diameter aluminum flex duct, one elbow, one wall cap.

Step 1: Determine application

Bathroom = 1 CFM/square foot

Step 2: Calculate the area to be ventilated in square feet.

Assuming an 8 ft ceiling: room length x width = area in square feet

8 ft x 10 ft = 80 sq.ft.

Step 3: Calculate your required CFM

1 CFM x 80 sq.ft. = 80 CFM

Step 4: Use the Equivalent Duct Length chart above to calculate duct run.

4a. 12 ft aluminum flex duct x 1.25 = 15 ft

4b. One elbow = 15 ft EDL

4c. One wall cap = 30 ft EDL

15 ft + 15 ft + 30 ft = 60 ft EDL

This is the equivalent duct length (or resistance) the fan must overcome to move air through the duct to the outside.

Step 5: Review models in catalog pages to find a model with desired feature. Features may include light fixture, heater or low-profile housing.

Note: Check with your local building inspector to confirm that these methods are accepted in your area.

Step 6: Use the EDL calculated in Step 4 to check on the performance curve for the fan selected in Step 5. Compare your calculated EDL to the curves for different EDLs on the performance curve for your selected product. Where they cross will tell you what airflow to expect. For the 60 feet of EDL in the example, interpolate between the curve for 50 feet and the one for 75 feet.

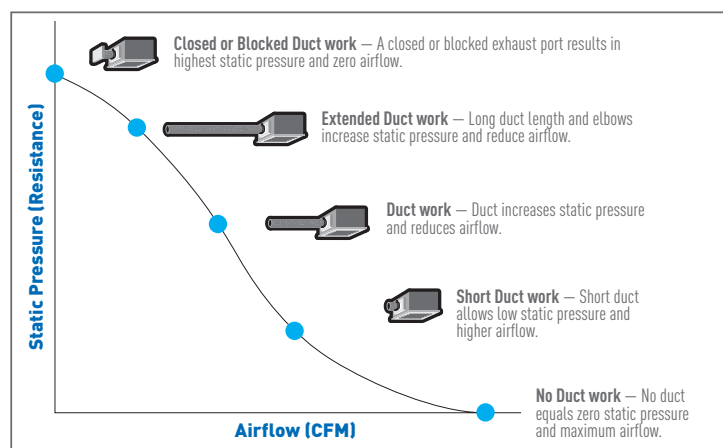


FIG. A

Equivalent Duct Length					
Duct Diameter					
		3"	4"	6"	8"
Duct	Smooth Metal	Same as measured duct length			
Material	Flex Aluminum	1.25 x duct length	1.25 x duct length	1.5 x duct length	1.5 x duct length
	Insulated Flex	1.5 x duct length	1.5 x duct length	1.75 x duct length	1.75 x duct length
Terminal	Wall Cap	30 feet	30 feet	40 feet	40 feet
Device	Roof Jack	30 feet	30 feet	40 feet	40 feet
Elbow	Adjustable	15 feet	15 feet	20 feet	20 feet

FIG. B



Installation

A practical guide to Panasonic fan installation

Proper fan installation is necessary to optimize performance. The following points outline installation techniques to help achieve optimum performance.

IMPORTANT: In order to reduce elbows and optimize fan performance, install the fan with the exhaust port pointed in the direction of the termination point. Be sure to use the duct diameter size specified for the selected fan. Reducing the duct diameter (at any point in the duct run) will create substantial static pressure and reduce the fan's performance by as much as 90%. Increasing the duct size almost always improves both sound and airflow performance

Selecting Duct: A smooth surface duct allows for optimum airflow. See Figure C. For best results, use galvanized sheet metal or possibly PVC. Flexible aluminum duct is durable, easy to install and often used. However, the ridges in aluminum flexible duct increase static pressure and can reduce airflow and fan performance. This results in lower CFMs, higher noise levels and higher energy consumption. The degree to which performance is affected depends on the length of duct, number and degree of elbows.


Sagging or weaving a fan duct will also increase static pressure and reduce a fan's performance. When using a flexible aluminum duct, support the entire length of the duct with braces or hangers to keep it as straight as possible for the entire run. If the duct lies across the attic, do not allow it to sag between each joist. Also, avoid weaving duct through trusses.

Using dryer duct connectors made of nylon or vinyl is not recommended due to high static pressure caused by its ridges and curvature. Insulated flexible duct must be fully extended to avoid added resistance.

Elbows: Rule number one is to avoid elbows and bends whenever possible. However, the fact is that many installations require at least one elbow, as shown in Figure D. There are two precautions you can take when installing elbows to achieve optimum airflow.


First, allow a 2-3 foot straight run out of the fan before the first elbow. This allows airflow to be uniform before passing through the first elbow. An installation that has a 90-degree elbow immediately after the fan exhaust port will cause air to flow back into the fan. This will reduce fan performance and increase noise. (Figure D)

FIG. D



Second, use a long radius angle, as shown in Figure E, to help ensure optimum airflow and minimum airflow noise.

FIG. E





The shortest, smooth inner surface duct with the least number of elbows will provide optimum fan airflow

Troubleshooting Advice:

1. During fan installation, the tape on the duct connector holding the damper shut must be removed.
2. Confirm with your contractor if screws were used to attach the duct to the fan. The damper may not open if obstructed by screws.
3. Check that the backdraft dampers on wall caps and roof jacks are able to move freely. Routine inspections are recommended as birds and other pests may inhabit these areas.
4. Duct work must be connected securely to wall caps and roof jacks.

FIG. C

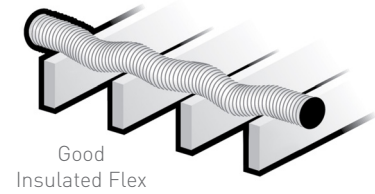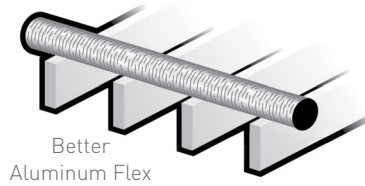

*A straight run over joists is better than the duct 'dipping' into each joist bay which will increase static pressure and, eventually, deposit water in the 'dips'.


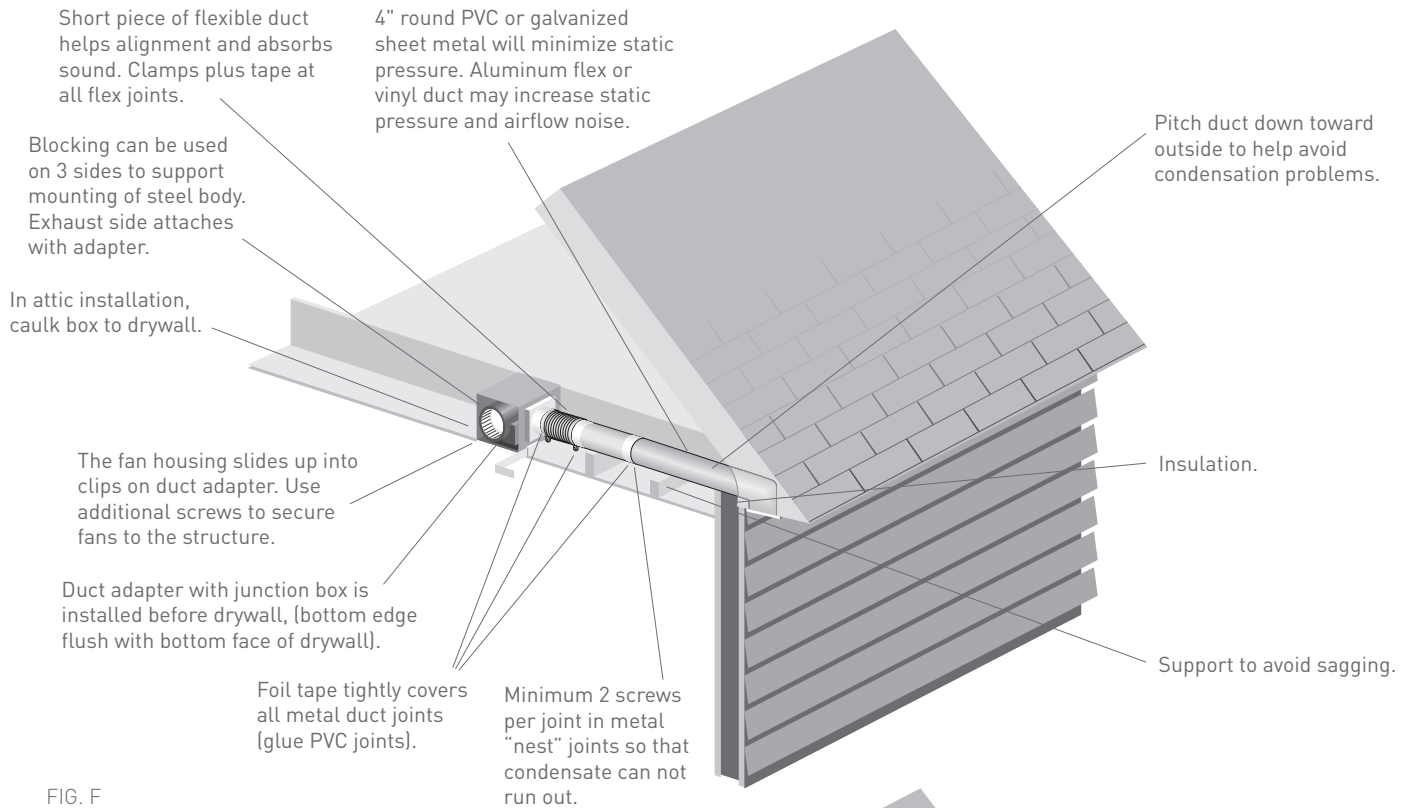


FIG. F

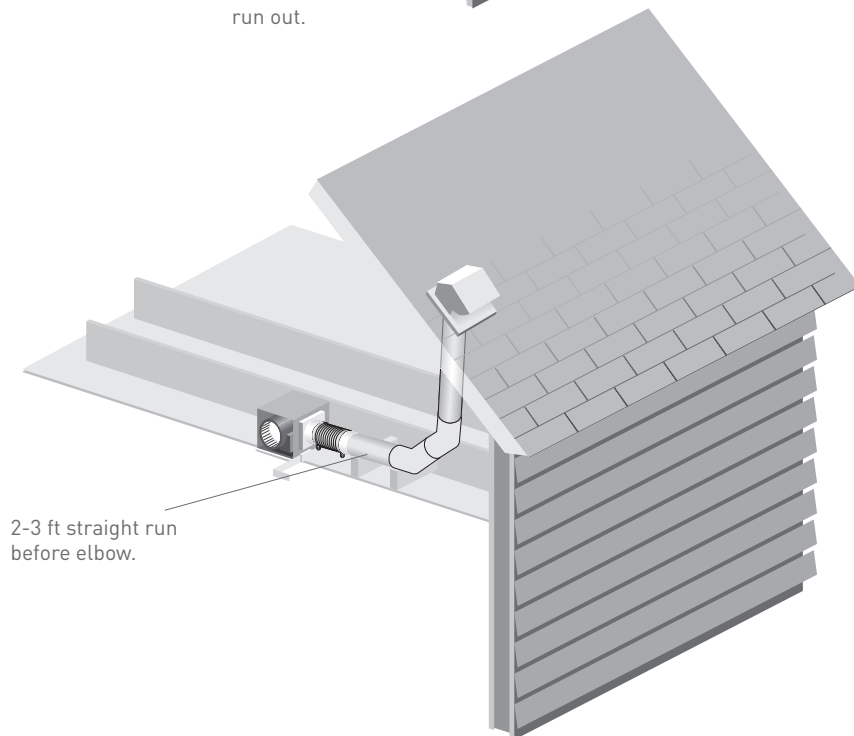

Note: If duct is in the attic, to avoid possible condensation problems, be sure it is either under loose fill insulation or it is fully insulated to minimum of R-6 with duct wrap.

FIG. G

**Panasonic
IAQ Division**

Two Riverfront Plaza
Newark, NJ 07102

For additional information, visit:
iaq.na.panasonic.com

Customer Service

9 am – 6 pm (EST) Monday through Friday
Phone: (866) 292-7299
Fax: (888) 553-0723

ventfans@us.panasonic.com

Design and specifications subject to change without notice.

IAQ26037CAT R7

July 2026

Panasonic