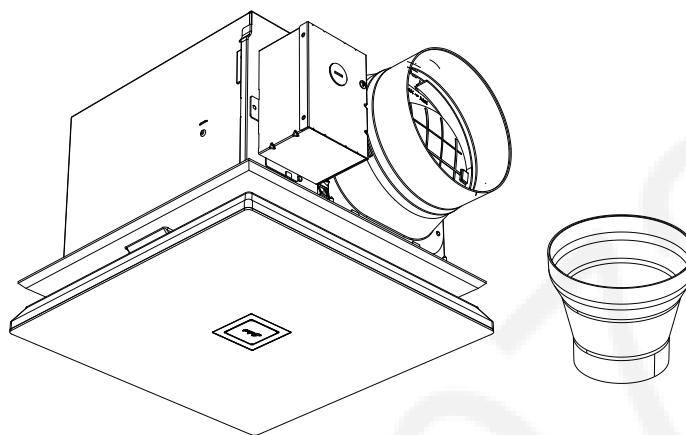


# Service Manual

Ventilating Fan

**FV-0511VKSL3K****WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

**IMPORTANT SAFETY NOTICE**

There are special components used in this equipment which are important for safety. These parts are marked by  in the Schematic Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without the manufacturer's approval. Please have a static electricity depletion process in place before handling these components.. Please use gloves when handling PCB parts during the repair process..

**CONTENTS****PAGE**

|                              |       |
|------------------------------|-------|
| 1.Specification .....        | 1     |
| 2.Parts Identification ..... | 3 ~ 6 |
| 3.Wiring Diagram .....       | 7     |
| 4.Parts List .....           | 8 ~ 9 |

# 1. Specification

| Model No.     | Air direction | Voltage (V) | Frequency (Hz) | Duct diameter (inches) | Air volume at 0.1"WG (CFM) | Noise (sones) | Speed (rpm) | Power (W) |                        | Weight lb.(kg) |
|---------------|---------------|-------------|----------------|------------------------|----------------------------|---------------|-------------|-----------|------------------------|----------------|
|               |               |             |                |                        |                            |               |             | Fan       | Lighting / Night Light |                |
| FV-0511VKSL3K | Exhaust       | 120         | 60             | 4                      | 110                        | <0.3          | 834         | 10.7      | 12.5/1.5               | 11.7(5.3)      |
|               |               |             |                |                        | 80                         | <0.3          | 735         | 6.4       |                        |                |
|               |               |             |                |                        | 50                         | <0.3          | 628         | 3.9       |                        |                |
|               |               |             |                | 6                      | 110                        | <0.3          | 644         | 7.1       |                        |                |
|               |               |             |                |                        | 80                         | <0.3          | 608         | 4.8       |                        |                |
|               |               |             |                |                        | 50                         | <0.3          | 610         | 3.7       |                        |                |

HVI Certified performance based on HVI Procedures 915, 916, and 920.

Remark: We divided the model into two versions: **Version A** (old) and **Version B** (new).

Panasonic

Ventilating Fan/Ventilateur

Model No. FV-0511VKSL3K

FC

Lot No.

AC 120 V 60 Hz 0.37A (Fan) 0.13A (Light)

| Duct | SP   | CFM | Sones | CFM | Sones | CFM | Sones |
|------|------|-----|-------|-----|-------|-----|-------|
| 6"   | 0.14 | 110 | <0.3  | 100 | <0.3  | 90  | <0.3  |
|      | 0.25 | 110 | <0.3  | 100 | <0.3  | 90  | <0.3  |
| 4"   | 0.14 | 110 | <0.3  | 100 | <0.3  | 90  | <0.3  |
|      | 0.25 | 110 | 0.6   | 100 | 0.6   | 90  | 0.5   |

Panasonic Corporation of North America

Assembled in Mexico / Assemblé au Mexique

51024

[24] Means Day


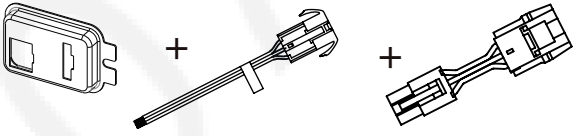



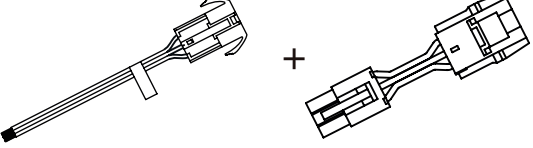


[10] Means month

[5] Means year: 2025

**Version A** (Product no. **before** October 24, 2025)

**Version B** (Product no. **after** October 24, 2025)


If you need to service the Adapter assy, main PCB, connector plate or the connector assembly and you have **Version A**, the adapters are already included to make it compatible with the new version. If you have **Version B**, you just need to remove the extra parts.

| No. | Part                             | New Service pack                                                                    |                                                                                       |
|-----|----------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 2   | FFV15KSL3911<br>ADAPTER ASSEMBLY | Piece of version B                                                                  | Adapter (remove if using Version B)                                                   |
|     |                                  |   |     |
| 5   | FFV15KSL3342<br>CONNECTOR ASSY L | Piece of version B                                                                  | Adapter (remove if using Version B)                                                   |
|     |                                  |  |   |
| 3   | FFV15KSL3914<br>CONNECTOR PLATE  | Piece of version B                                                                  | Adapter (remove if using Version B)                                                   |
|     |                                  |  |   |
| 12  | FFV0511VKSL3<br>POWER PCB ASSY   | Piece of version B                                                                  | Adapter (remove if using Version B)                                                   |
|     |                                  |  |  |

## 2. Parts Identification

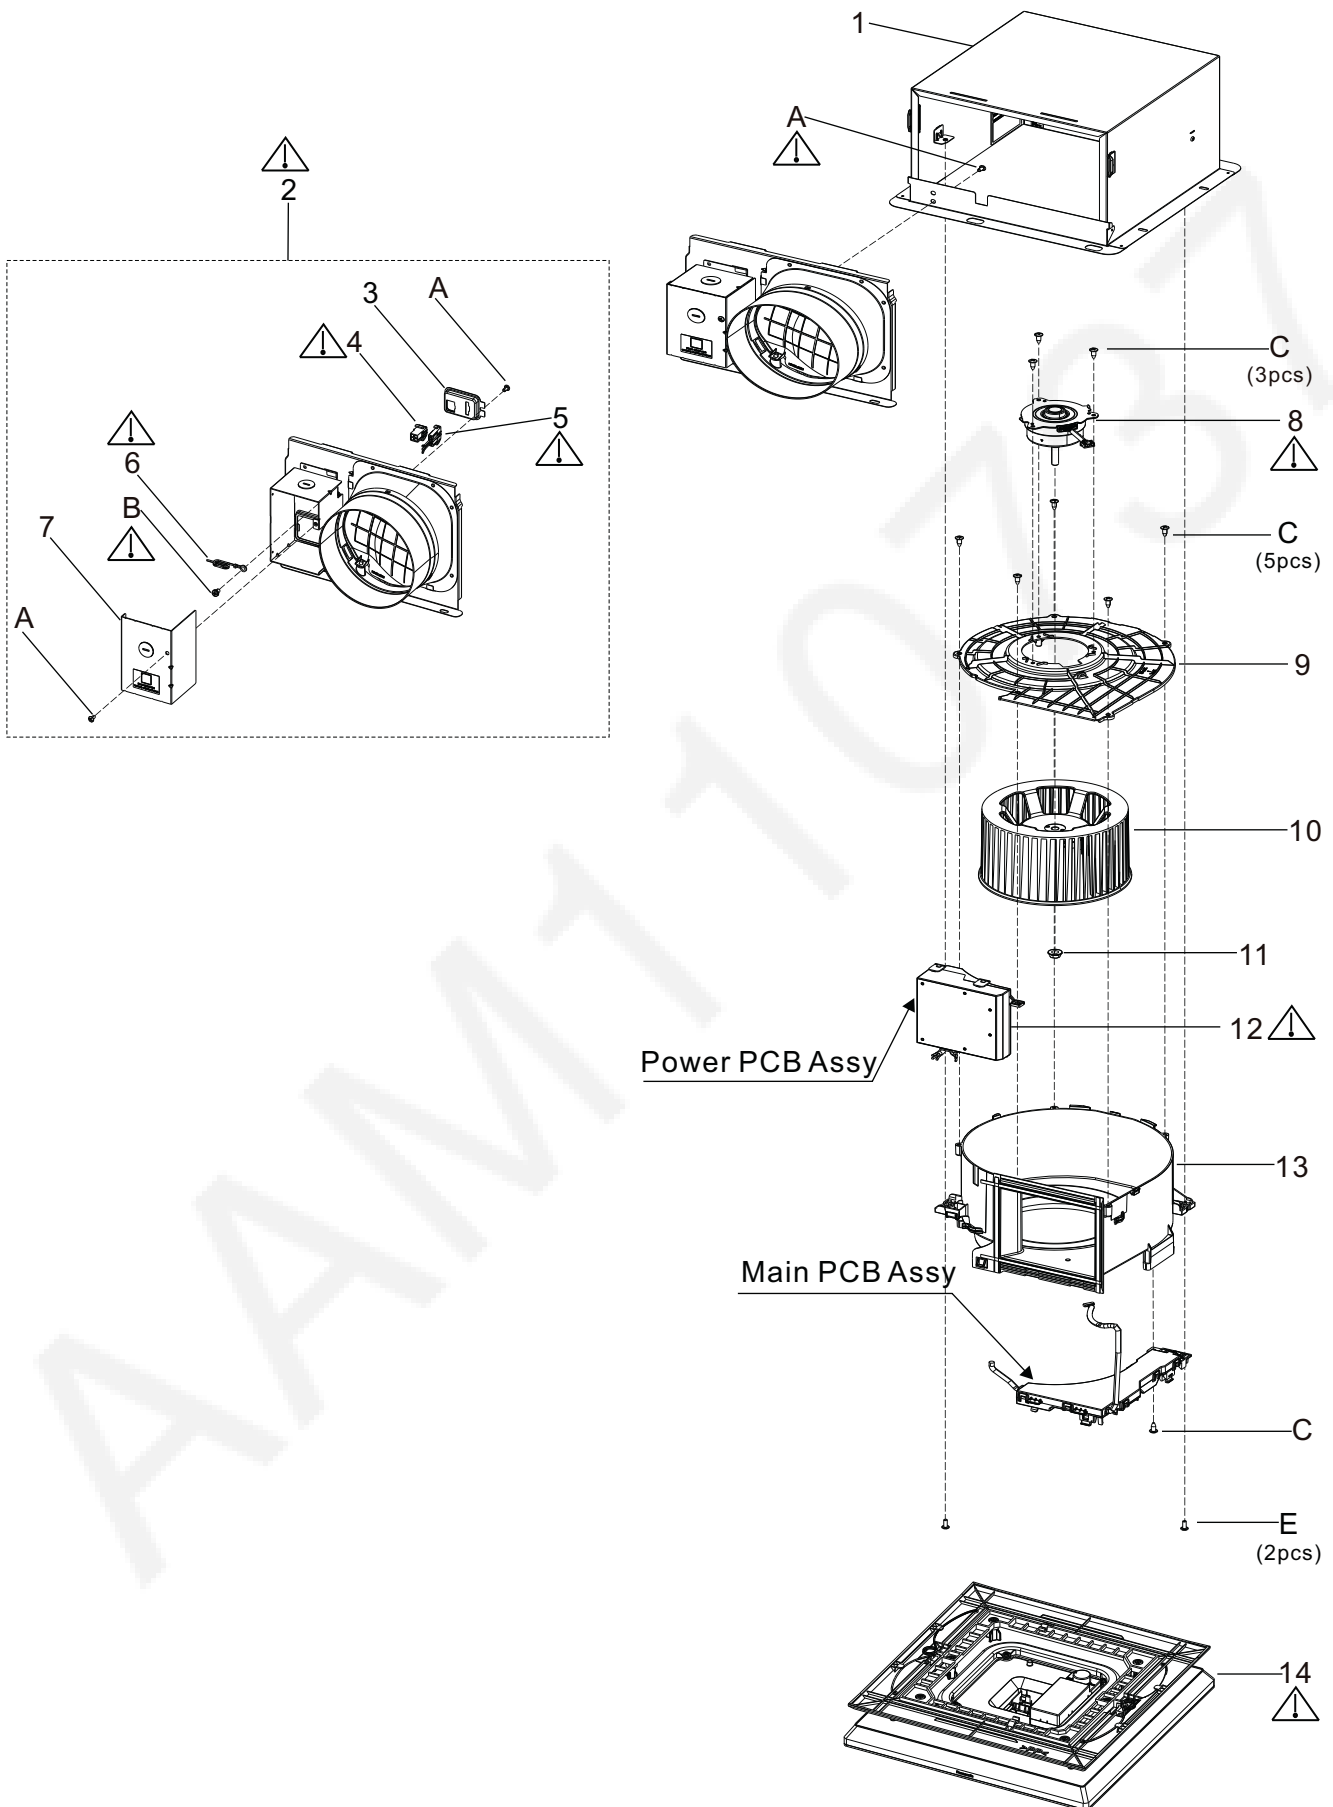FV-0511VKSL3K


### Main Body Section




# 2.Parts Identification

FV-0511VKSL3K
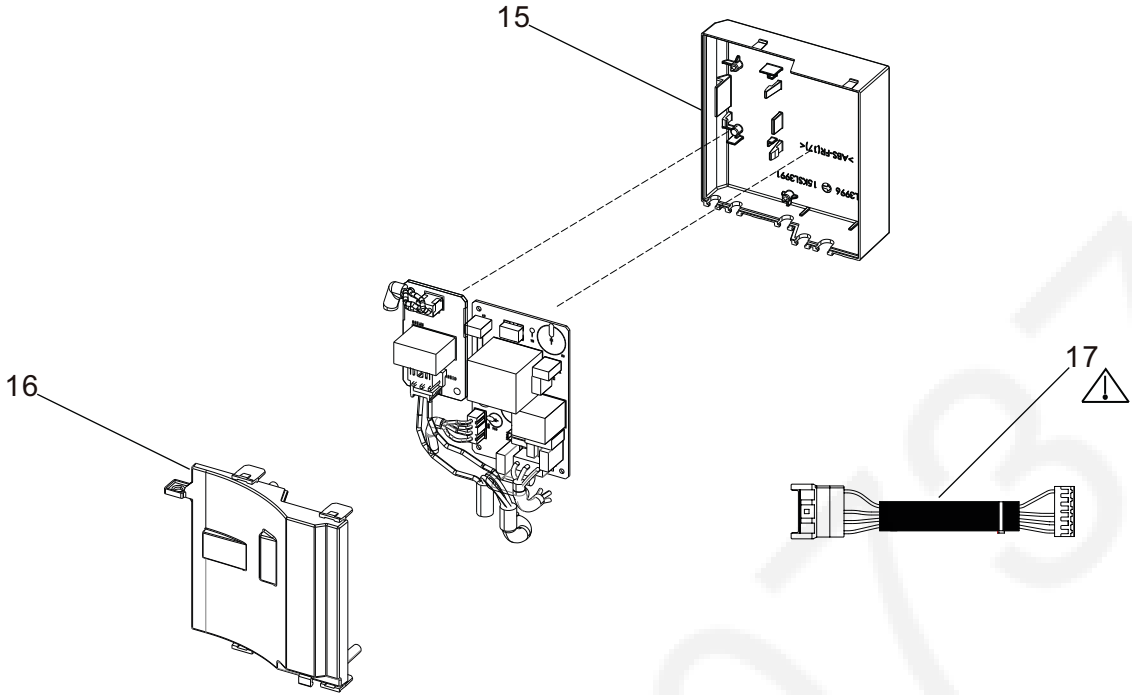
## Power PCB Assy




## Main PCB Assy

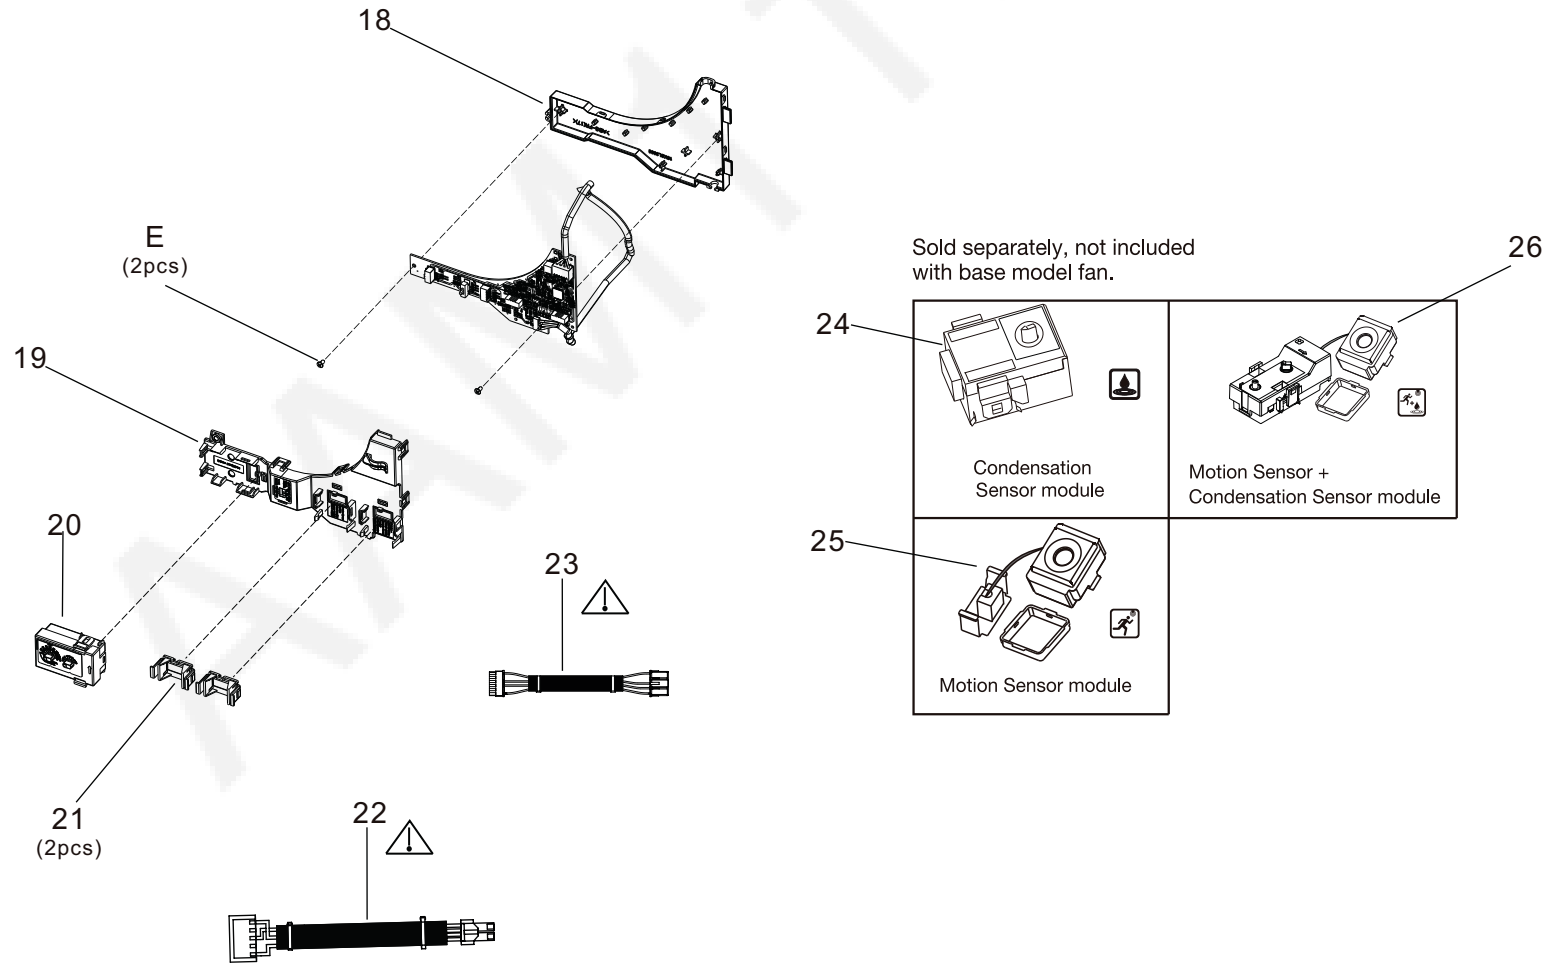

## 2. Parts Identification

FV-0511VKSL3K
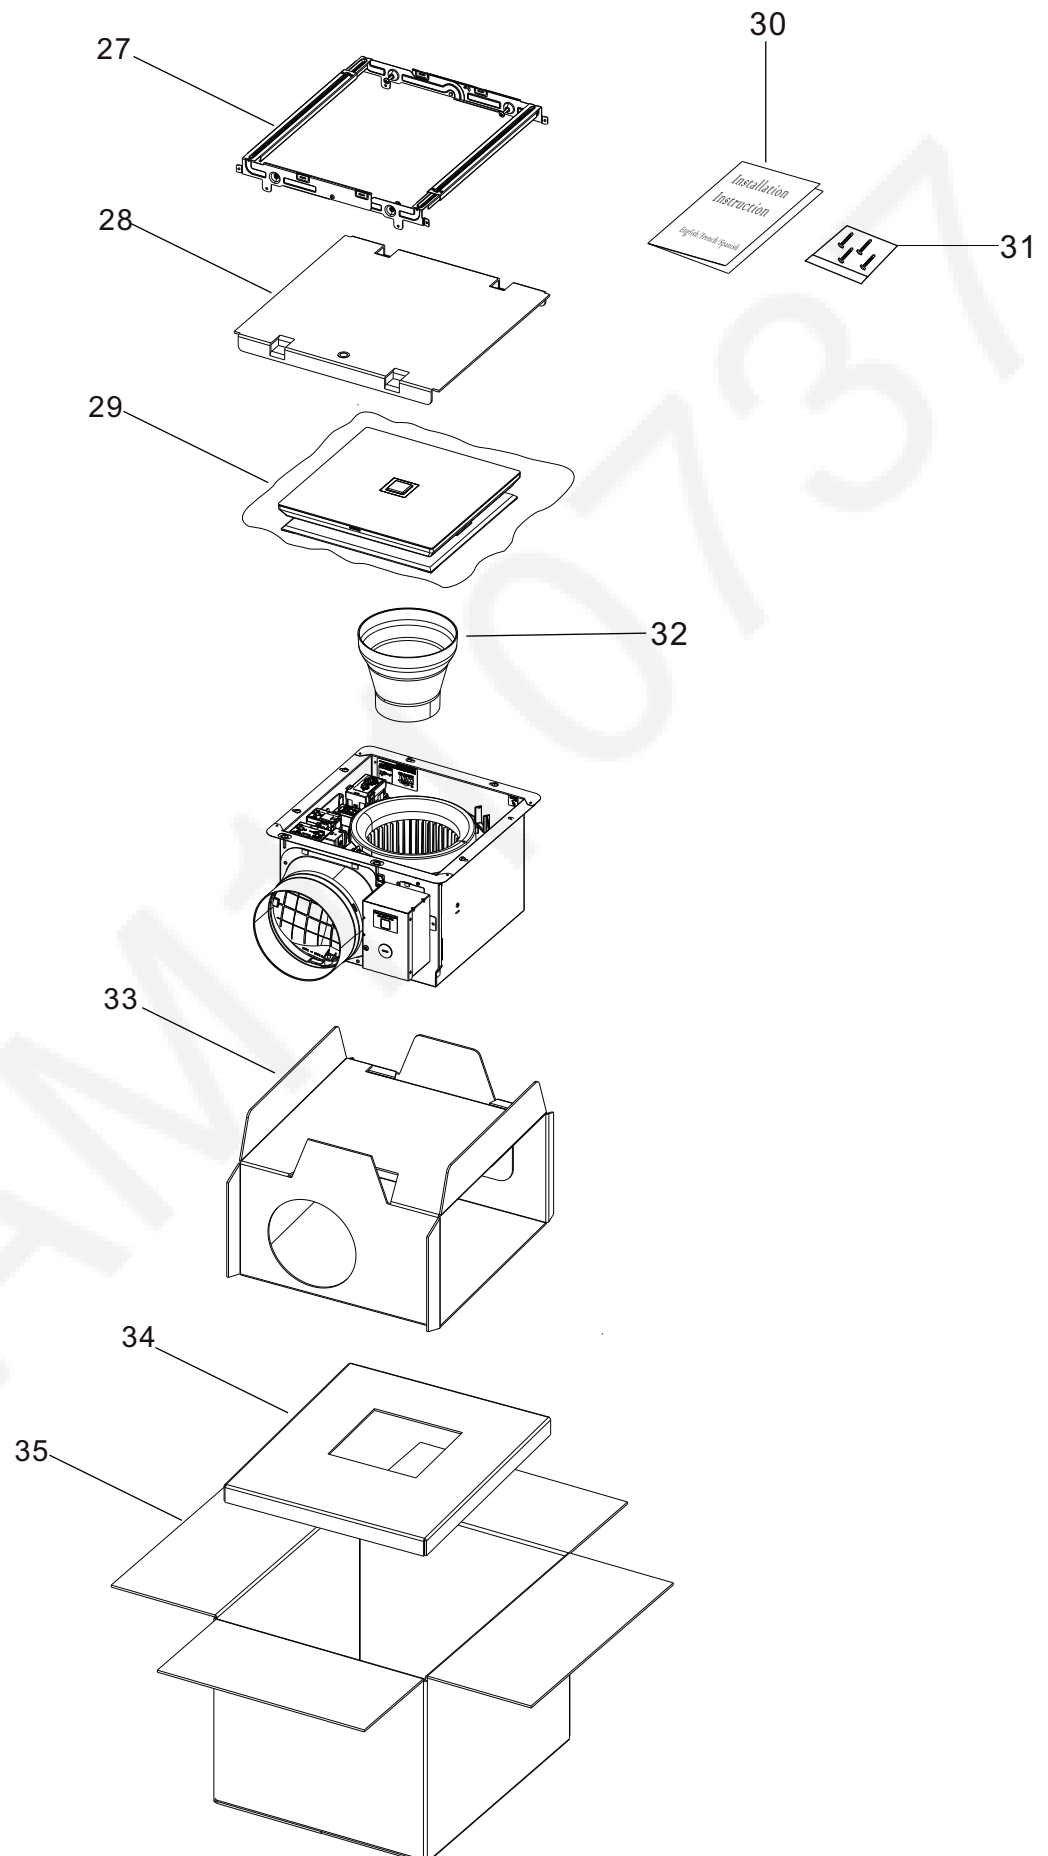
### Packing Section



## 2. Parts Identification

FV-0511VKSL3K

### Main Label

36



37

#### WARNING:

1.Before service or cleaning unit, switch power off at service panel and lock service panel to prevent power from being switched on accidentally.

2.Acceptable for use over a bathtub or shower when installed in a GFCI protected branch circuit.

#### CAUTION:

To reduce the risk of injury to persons, install fan at least 2.1m(7 feet) above the floor.

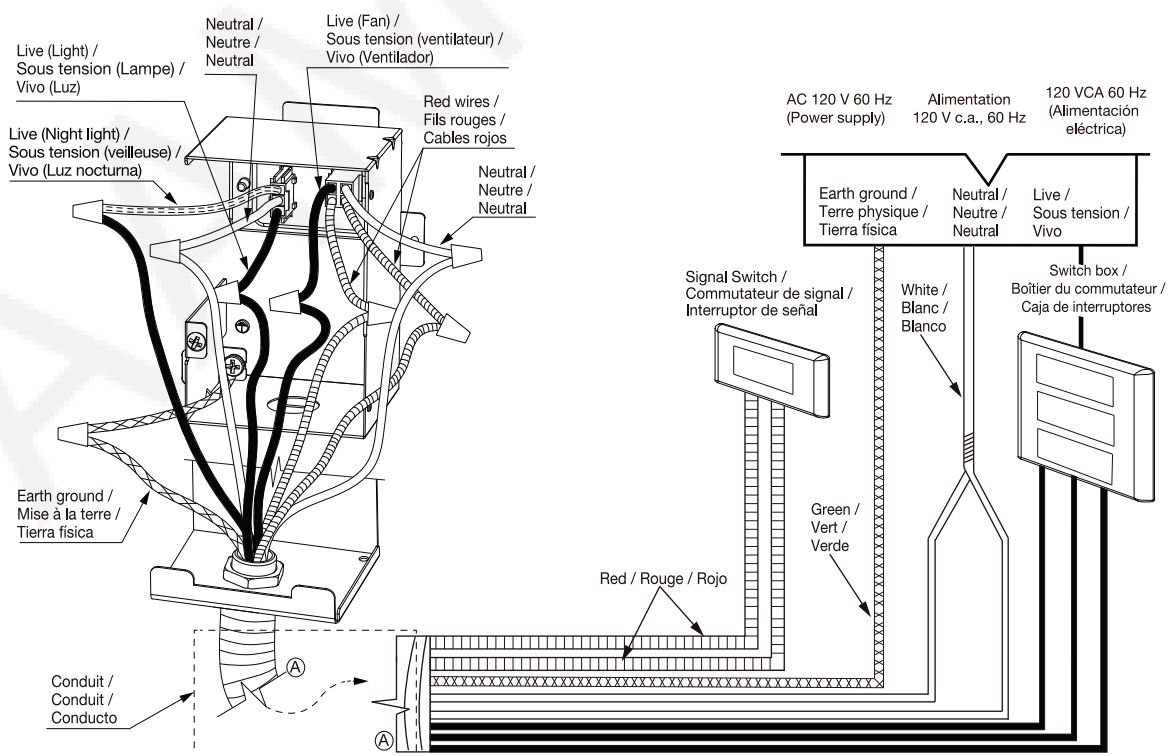
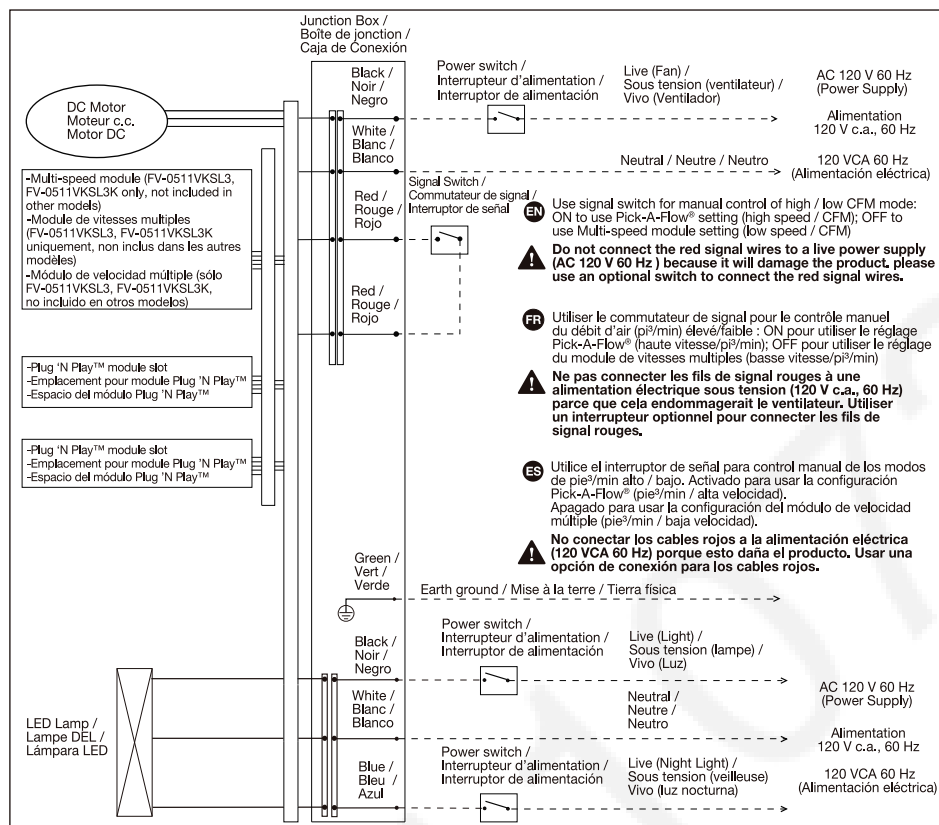
#### ATTENTION:

1.Pour l'entretien ou le nettoyage, mettre l'appareil hors tension au niveau de la facade des commandes et du panneau de verrouillage des commandes afin d'empêcher toute mise sous tension accidentelle.

2.Convient pour utilisation au-dessus d'une baignoire ou d'une douche si raccordé à un circuit de dérivation protégé aux normes GFCI.

3.Afin de réduire les risques de blessures corporelles, installer le ventilateur à au moins 2,1m(7 pieds) du sol.

# 3. Wiring Diagram



## 4. Parts List

FV-0511VKSL3K

### Main Body Section

| No. | Part No.       | Part Name            | Q'ty | Remark |
|-----|----------------|----------------------|------|--------|
| 1   | FFV15KSL3900   | Frame Assembly       | 1    |        |
| 2   | FFV15KSL3911   | Adapter Assembly     | 1    | ⚠      |
| 3   | FFV15KSL3914   | Connector Plate      | 1    |        |
| 4   | FFV511FC1301   | Connector Assy V     | 1    | ⚠      |
| 5   | FFV15KSL3342   | Connector Assy L     | 1    | ⚠      |
| 6   | FFV11QCL1331   | Ground Wire          | 1    | ⚠      |
| 7   | FFV11QCL1912A  | Junction Cover       | 1    |        |
| 8   | FFV11QCL1M21AX | Motor                | 1    | ⚠      |
| 9   | FFV15KSL3904   | Motor Support        | 1    |        |
| 10  | FFV0400115S    | Blade                | 1    |        |
| 11  | FFV7020021S    | Nut                  | 1    |        |
| 12  | FFV0511VKSL3   | Power PCB Assy       | 1    | ⚠      |
| 13  | FFV15KSL390    | Casing section       | 1    |        |
| 14  | FFV11VSL39K    | Slim LED Grille      | 1    | ⚠      |
| A   | FFVXTT4-8FFJ   | Screw (ST4-8)        | 3    |        |
| B   | FFVXYM4DC8BN   | Screw w/washer(M4-8) | 1    |        |
| C   | FFV7000089S    | Screw (ST4-12)       | 9    |        |
| D   | FFV7000065S    | Taping Bind          | 2    |        |

### Main PCB Section

| No. | Part No.     | Part Name            | Q'ty | Remark |
|-----|--------------|----------------------|------|--------|
| 15  | FFV15KSL396  | Power PCB Box        | 1    |        |
| 16  | FFV15KSL997  | Power PCB Cover      | 1    |        |
| 17  | FFV15KSL320  | Motor Lead Wire Assy | 1    | ⚠      |
| 18  | FFV15KSL393  | Main PCB Box         | 1    |        |
| 19  | FFV15KSL394  | Main PCB Cover       | 1    |        |
| 20  | FFV5530071S  | Multi-Speed Module   | 1    |        |
| 21  | FFV0900063S  | Connector Cover      | 2    |        |
| 22  | FFV15KSL317  | Base PCB Lead Wire   | 1    | ⚠      |
| 23  | FFV15KSL172  | Power Lead Wire      | 1    | ⚠      |
| 24  | FFV0010237S  | Condensation Sensor  | 1    |        |
| 25  | FFV3740029S  | Motion Sensor        | 1    |        |
| 26  | FFVFVCMVK3   | Dual Sensor          | 1    |        |
| E   | FFVXTN3-8GFJ | Screw (M3-8)         | 2    |        |

## 4. Parts List

FV-0511VKSL3K

### Packing Section

| No. | Part No.     | Part Name             | Q'ty | Remark |
|-----|--------------|-----------------------|------|--------|
| 27  | FFV11QCL1920 | Hanger Assy           | 1    |        |
| 28  | FFV4710381S  | Grill Pad Assy        | 1    |        |
| 29  | FFV4650016S  | Poly Cover            | 1    |        |
| 30  | FFV15VKL3420 | Inst. Instruction EFS | 1    |        |
| 31  | FFV01NES0045 | Accessory A           | 1    |        |
| 32  | FFV15KSL3920 | Reducer               | 1    |        |
| 33  | FFV11KSL3402 | Carton Insert Body    | 1    |        |
| 34  | FFV11KSL3403 | Carton Insert Base    | 1    |        |
| 35  | FFV11KSL34KA | Packing Case Assy     | 1    |        |
| 36  | FFV11KSL3055 | QR Code Label         | 1    |        |
| 37  | FFV15VK30083 | Caution Label         | 1    |        |